



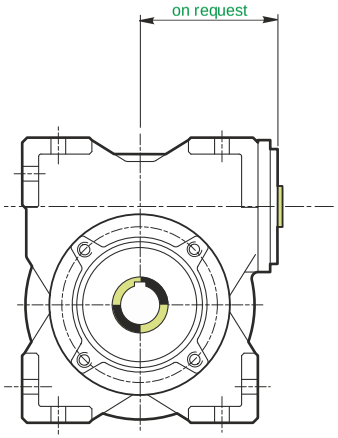


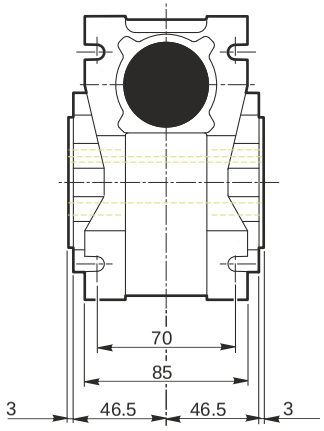

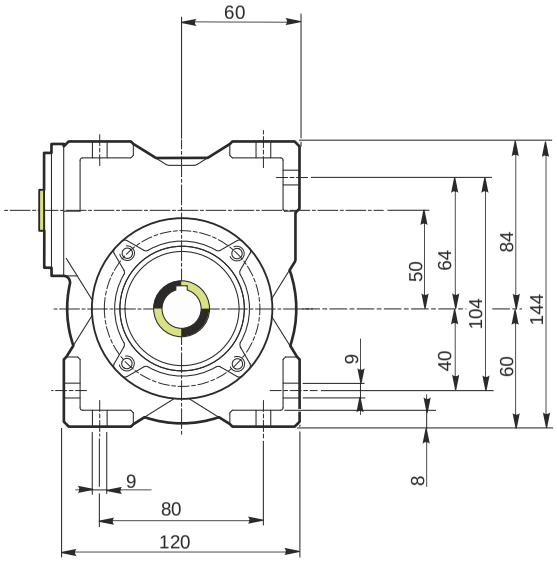

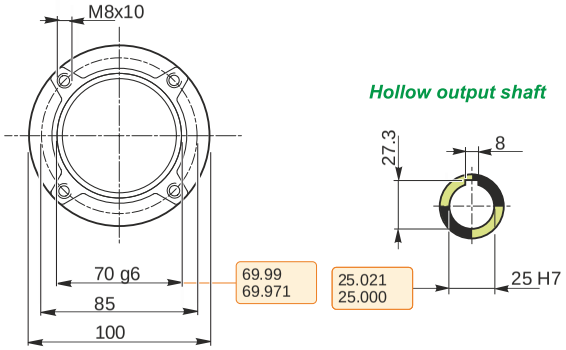


Hollow output shaft



Varvel SpA - Via 2 Agosto 1980 n. 9 - 40056 Crespellano BO - Italy - Tel. +39 051 6721811 - varvel@varvel.com

Mounting positions

B3 B6 B7 B8 V5 V6

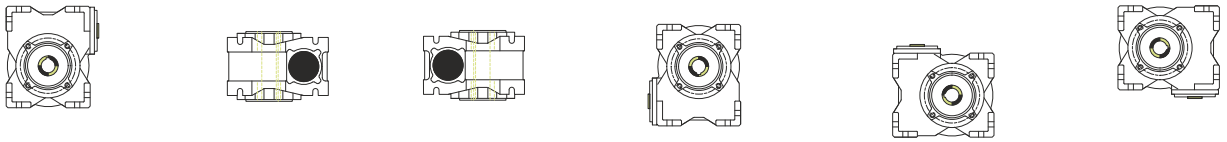


0.13

Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

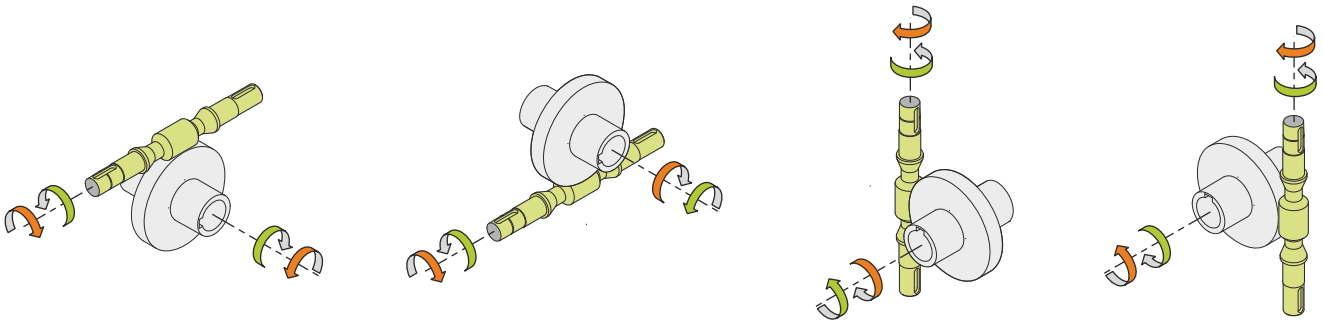

Weight

Gear unit [kg]	3.8

Gearing data

Axial module	2.5
Number of starts	2
Lead angle	11° 18’
Pressure angle	20°

Backdriving

Variable static self-locking
Quick back-driving in case of vibrations
Dynamic back-driving

Varvel SpA - Via 2 Agosto 1980 n. 9 - 40056 Crespellano BO - Italy - Tel. +39 051 6721811 - varvel@varvel.com