

ACME Hose Couplings for Liquid or Vapor Service with Integral Screen 3195S and A3195S

Application

The 3195S/A3195S Hose Couplings are designed to prevent debris from entering and impeding the action of valves and components in LPG piping systems at bulk and industrial plants.



Features

- Meets NFPA 58 requirements for liquid transfer.
- Stainless steel screen installed in the tail piece of the hose coupling.
- Temperature range of -40°F to +165°F (-40°C to +73°C)
- MAWP: 250 PSIG(17 Bar)

Materials

A3195


BodyDuctile iron Nut & Cadmium-Plated Nipple

A3195S

BodyDuctile iron Nut & Cadmium-Plated Nipple
Strainer.....300 Series Stainless Steel



3195S



Style B
For Liquid Filling

Ordering Information

Part Number	Material	Style	A. Hose Connection (M. NPT)	B. Coupling Connection (F. ACME)	C. Tailpiece Bore	D. Hose End To Nut	E. Overall Length
3195S	Brass Nut & Steel Nipple	B	2"	3 1/4"	1 1/8"	2 1/4"	3 5/8"
A3195S	Steel						

3 1/4" M.ACME X M.NPT Adapter with Vent Valve & Integral Screen 5769

Application

Designed to prevent debris from impeding the action of valves and components of LPG piping systems at bulk plants and industrial plants.




Features


- Meets NFPA 58 requirements for liquid transfer
- Stainless steel screen
- Vent valve available in brass or stainless steel
- Temperature range of -40°F to +165°F (-40°C to +73°C)
- MAWP: 400 PSIG(27 Bar)

Materials

Body Brass
Screen Stainless Steel
Gasket..... Resilient Rubber

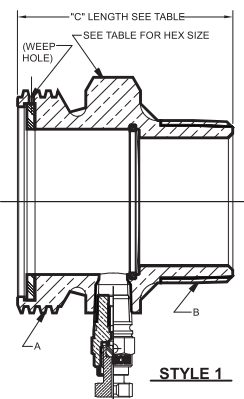

STYLE 1

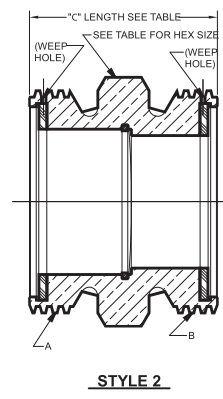

STYLE 2



5769HVB

Ordering Information

Part Number	Style	Gasket Qty	Vent Valve	Hex Size	Thread "A"	Thread "B"	"C Length
5769H	1	1	-	3¼"	3¼" ACME	2" M.NPT	2.875
5769K				3½"		3" M.NPT	3.625
5769M	2	2		3¼"		3¼" ACME	2.750
5769HVB	1	1	3165CBT	3¼"		2" M.NPT	3.150
5768HVSS			TSS3169				
5769HVP			Unplugged				