
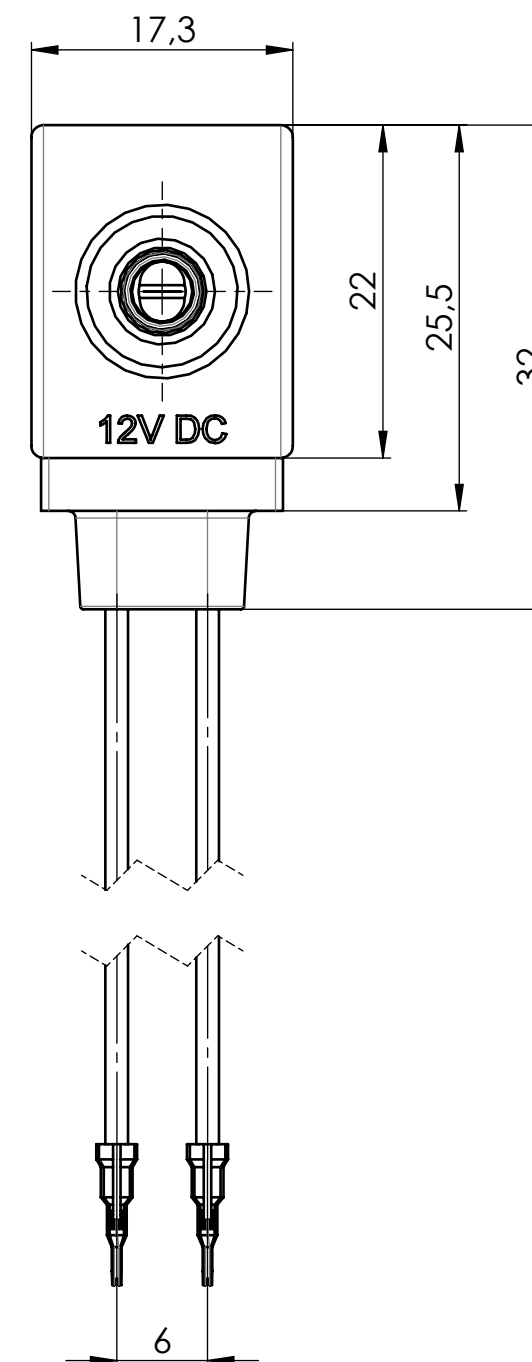
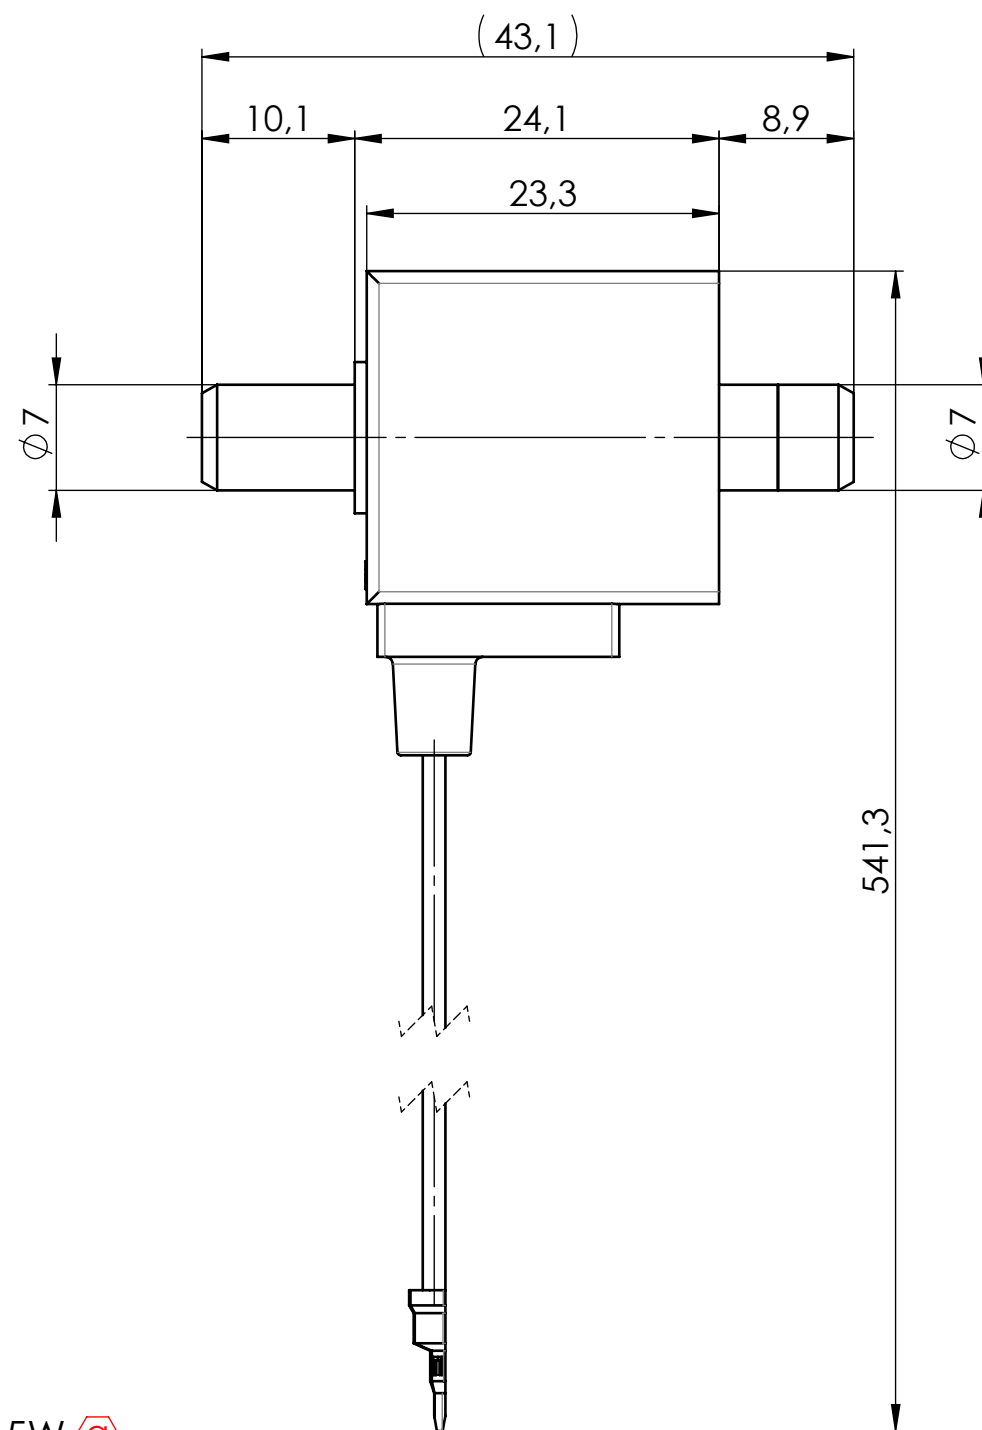


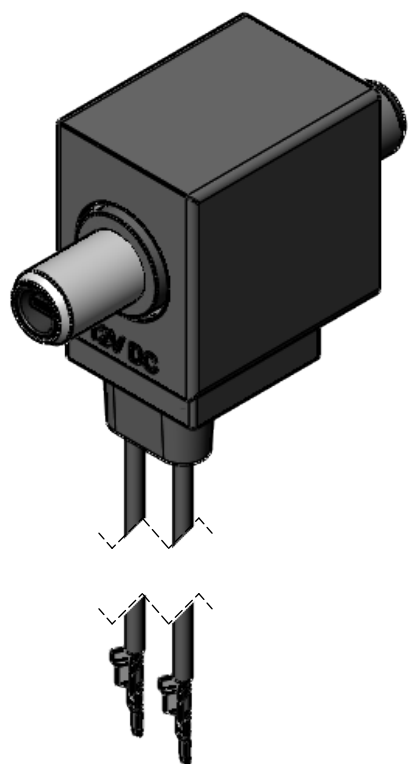

Main characteristics

Pump tested with oil at 20°C
complete test made in approximately 30 [s]

Tested with 16 [V] and 15 [Hz]

Type of pump : ESX 04-V/DLC-12/50-L=500-3,5W 

Liquid temperature : 1 to 50 [°C]

Ambient temperature : 1 to 60 [°C]

Insulation class : H (180°C)

Duty cycle : 100% ED

Release pump + performances

	Date	Signature
Customer release		

									Drawn	11.10.17	ASC
a	2545-23	16.04.24	BRU						Controlled	16.04.24	BRU
N°	Modification	Date	Name	N°	Modification	Date	Nom			Date	Name
We reserve all rights provided by the law on protection of this drawing	Weight [g] : 19.74			Dimensions :		Material :					
	Volume [mm³] : 11023.23			17,3 x 43,1 / 541,3		-					
	Usage : -			Description :							
	 Gotec SA Route de Mangold 11 CH - 1958 ST-LEONARD Tél. : +41 (0)27 205 72 05 www.gotec.ch			ESX 04-V/DLC-12/50-L=500-3,5W 							
Scale :				N° drawing :							
Tolerances general				2:1		116454				a	
-											