
AF 63/125

Round cylinder - A-series - double acting - magnetic piston



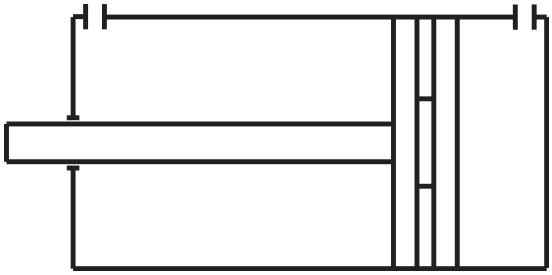


Technical data


Port size / Connection	G 3/8"
Piston rod thread	M16 x 1,5 - male thread
Medium	Compressed air
Traction force (6 bar)	1597 N
Piston type	Magnetic
Material seals	NBR, PU (max. 80°C)
Material heads	Anodized aluminum
Diameter	Ø63
Temperature range	-20°C...+80°C
Material body	Stainless steel
Material piston	Anodized aluminum
Material guide bushing	Sintered bronze
Piston rod diameter	Ø20 mm
Stroke	125 mm
Operating pressure	1...10 bar
Thrust force (6 bar)	1776 N
Cushioning	Built-in cushioning rings
Material piston rod	Stainless steel (AISI 316)
Ways	Double acting

HAFNER Pneumatik Krämer GmbH & Co. KG
Stammheimerstraße 10
70806 Kornwestheim
Germany

AF 63/125

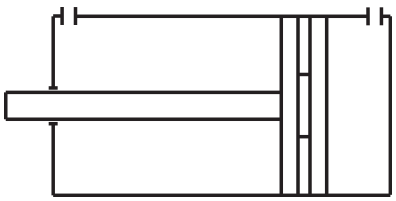

Round cylinder - A-series - double acting - magnetic piston

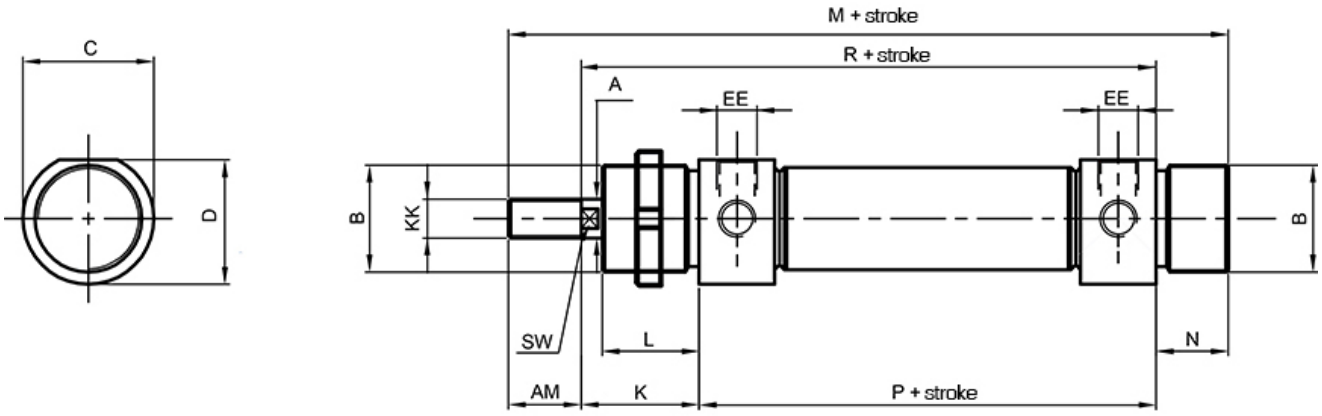

Type number	Ø [mm]	A	B	C	D	K	L	M	N	P	R	AM	EE	KK	SW
AF 32/...	Ø 32	12	M 30 x 1,5	38	36,5	38	30	168	14	96	134	20	G 1/8"	M 10 x 1,25	10
AF 40/...	Ø 40	16	M 38 x 1,5	46	44	45	35	196	16	111	156	24	G 1/4"	M 12 x 1,25	12
AF 50/...	Ø 50	20	M 45 x 1,5	57	55	50	38	220	18	120	170	32	G 1/4"	M 16 x 1,5	16
AF 63/...	Ø 63	20	M 45 x 1,5	70	67,5	50	38	224	18	124	174	32	G 3/8"	M 16 x 1,5	16

HAFNER Pneumatik Krämer GmbH & Co. KG
Stammheimerstraße 10
70806 Kornwestheim
Germany