


ADAM-5000/485 ADAM-5000E

**4-slot Distributed DA&C System
for RS-485**

**8-slot Distributed DA&C System
for RS-485**

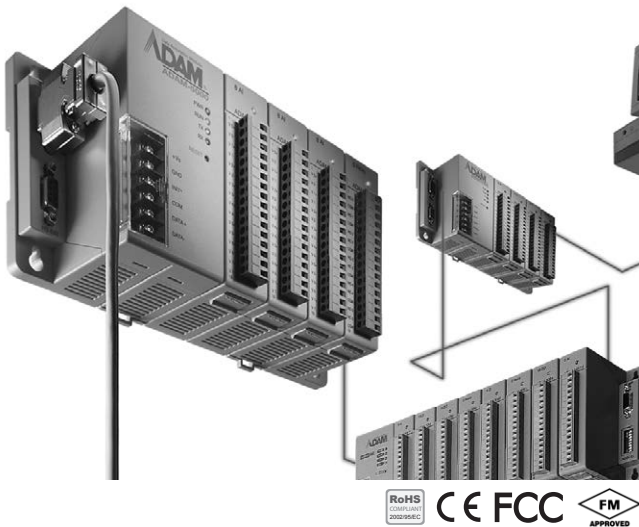

Features

- RS-485 communication for easy installation and networking
- 4 or 8 slots for up to 128 points data monitoring card control in one module
- Extensive software support, includes windows DLL drivers, OCX drivers, OPC server and popular HMI/SCADA software drivers
- Seamlessly integrated with easy-to-use ADAMView data acquisition software
- Supports ADAM ASCII protocol or Modbus®/RTU protocol
- Supports Modbus/RTU protocol with user-defined Modbus address

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55
09120 Chemnitz
E-Mail: info@amc-systeme.de

Tel.: +49/371/38388-0
Fax: +49/371/38388-99
Web: www.amc-systeme.de

Introduction

The ADAM-5000/485 and ADAM-5000E systems conform to the EIA RS-485 communication standard. This is the industry's most widely used, balanced, bidirectional transmission line standard. RS-485 was specifically developed for industrial applications to transmit and receive data at high rates over long distances.

Specifications

Control System

- **CPU** 16-bit 80188 microprocessor
- **I/O Slots** ADAM-5000/485: 4
ADAM-5000E: 8
- **LED Indicators** Power, CPU, communications
- **Watchdog Timer** 1.6 sec. (System)

Communications

- **Command Format** ASCII command/response protocol, Modbus/RTU
- **Communication Distance** RS-485: 1.2 km (4000 feet)
- **Data Format** Asynchronous. 1 start bit, 8 data bits, 1 stop bit, no parity
- **Network Protocols** Programming link: RS-232 (3-wire: TX, RX, GND)
Communication: RS-485 (2-wire)
- **Reliability Check** Communication error checking with checksum
- **Max. Nodes** 128 (in RS-485 daisy-chain network)
- **Speeds (kbps)** 1.2, 2.4, 4.8, 9.6, 19.2, 38.4, 57.6, and 115.2

Power

- **Power Consumption** 3 W @ 24 Vdc (ADAM-5000/485)
(not including I/O modules)
4.0 W @ 24 Vdc (ADAM-5000E)
(not including I/O modules)
- **Power Input** Unregulated 10 ~ 30 V_{DC}

Software

- **Driver Support Windows DLL, OPC Server, Wonderware InTouch, Intellution, iFIX, Citect, Advantech Studio, ADAMView**
- **C and .NET Class Library**

Protection

- **Communication Line Isolation** 2,500 V_{DC} (ADAM-5000/485)
3,000 V_{DC} (ADAM-5000E)
- **I/O Module Isolation** 3,000 V_{DC}
- **Transient Protection** RS-485 communication lines, power input
- **Power Reversal Protection** Yes

General

- **Certification** CE, FM
- **Connectors** 1 x DB9-M/DB9-F/screw terminal for RS-485 (communication)
1 x DB9-F for RS-232 (configuration)
1 x Screw-terminal for power input
- **Dimensions (WxHxD)** 4-slot: 231 x 110 x 75 mm
8-slot: 355 x 110 x 75 mm
- **Enclosure** ABS+PC
- **Mounting** DIN-rail, wall, rack (with mounting kit)

Environment

- **Humidity** 5 ~ 95%, non-condensing
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storing Temperature** -25 ~ 85°C (-13 ~ 185°F)

Ordering Information

- **ADAM-5000/485** 4-slot Distributed DA & C System for RS-485
- **ADAM-5000E** 8-slot Distributed DA & C System for RS-485

- 1 WebAccess+ Solutions
- 2 Machine Automation
- 3 Energy Automation
- 4 Building Automation Systems
- 5 Automation Software
- 6 Operator Panels
- 7 Automation Panel PCs
- 8 Industrial Panel Computers & Panel PC
- 9 Industrial Monitors
- 10 Industrial Wireless Solutions
- 11 Industrial Ethernet Solutions
- 12 Serial Device Servers and IP Gateways
- 13 Serial Communication Cards
- 14 Embedded Automation Computers
- 15 PACs
- 16 Compact PCI Systems
- 17 M2M I/O Modules
- 18 RS-485 I/O Modules

Irrtum und Änderungen vorbehalten – auch ohne vorherige Ankündigung. Verwendete Hardware- und Softwarebezeichnungen, Marken sowie Firmennamen können eingetragene Warenzeichen sein und unterliegen somit den gesetzlichen Bestimmungen. / Information in this document is subject to change without prior notice. The software and hardware designations or brand names used in this text are in most cases trademarks or registered trademarks of their respective companies and are thus subject to law.



ADVANTECH iAutomation
Premier Partner