




ELECTROSWITCH
UNIT OF ELECTRO SWITCH CORP.
NEYMOUTH MASSACHUSETTS 02188
TEL: (617) 335-5200 FAX: (617) 335-4253


SERIES 24 MANUAL RESET LOCKOUT RELAY

7804F

STANDARD
NAMEPLATE ENGRAVING



CODE 17C-2L22

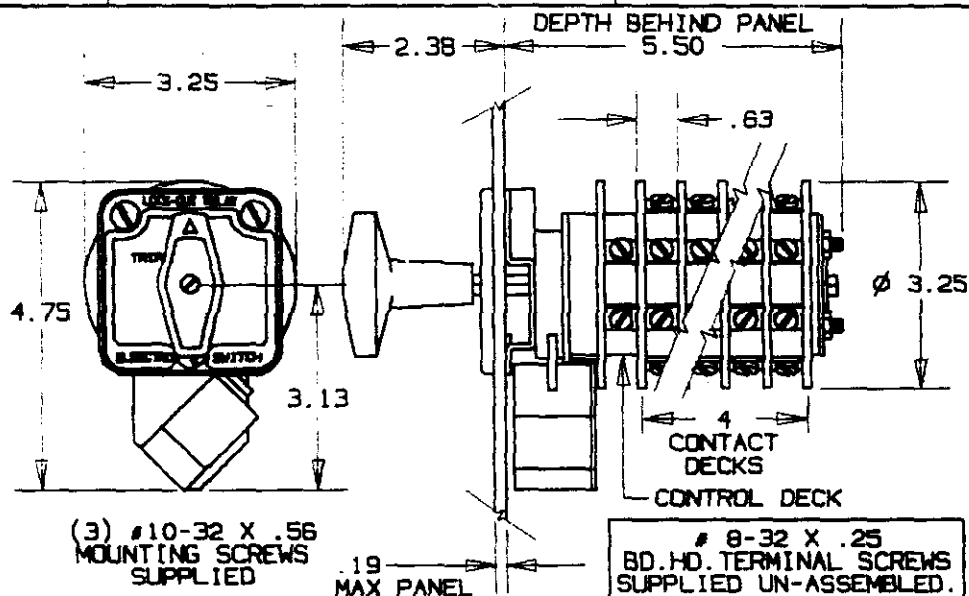

TRIP COIL SPECIFICATIONS

NOMINAL VOLTAGE:	250 VDC
OPERATING RANGE:	70-280 VDC
THRESHOLD:	33 VDC (MIN)
COIL RESISTANCE:	104.0 Ω
COIL BURDEN:	2.4 AMP AT 250 VDC

FOR FURTHER INFORMATION REFER TO
TECHNICAL PUBLICATION LDR-1




UL RECOGNIZED
CONTACT RATINGS

20A-120VAC	3A-125VDC
15A-240VAC	1A-250VDC
6A-600VAC	


TYPICAL CONTACT DECK LAYOUT

	CONTACTS		POSITION	
			TRIP	RESET
DECK 1	11	13		X
	12	18	X	
	15	17		X
	14	16	X	




ADDITIONAL CONTACT DECKS SAME AS
DECK 1 EXCEPT TERMINAL NUMBERS.
(DECK 2: 21 TO 28. DECK 3: 31 TO 38 ETC.)


PANEL DRILLING DIMENSIONS

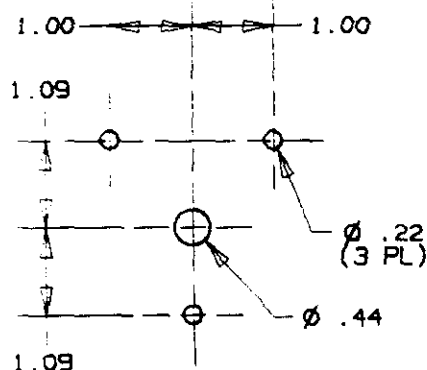

CONTROL CIRCUIT

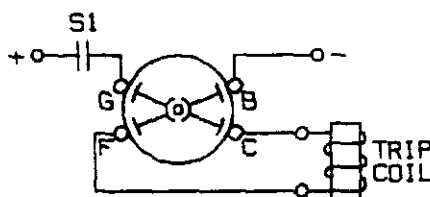

LAYOUT



SCHEMATIC

	CONTACTS		POSITION	
			TRIP	RESET
CONTROL DECK	B0	OC		X
	F0	OG		X

MADE BY: I.R.U. DATE: 8/30/78
APPR BY: J.M. DATE: 8/31/78

DWG. NO:
SHEET 1 OF 1

REV
D

FN-

REVISIONS: D ECN 20436
WDS 1/4/93 JR