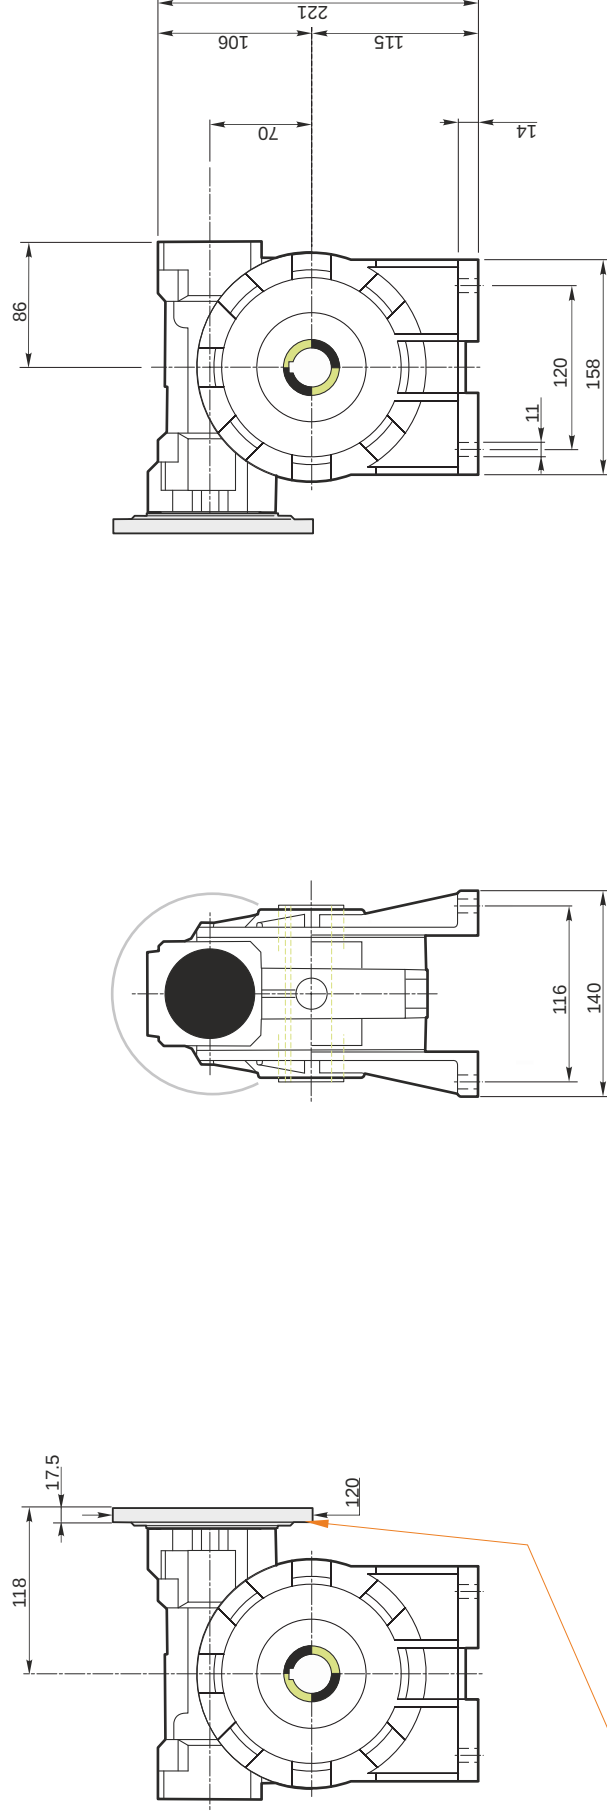


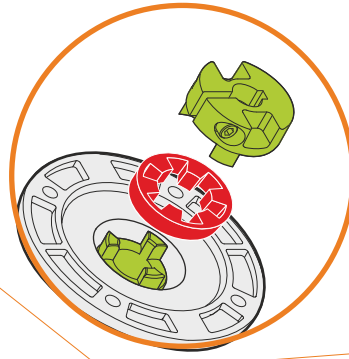








Hollow output shaft



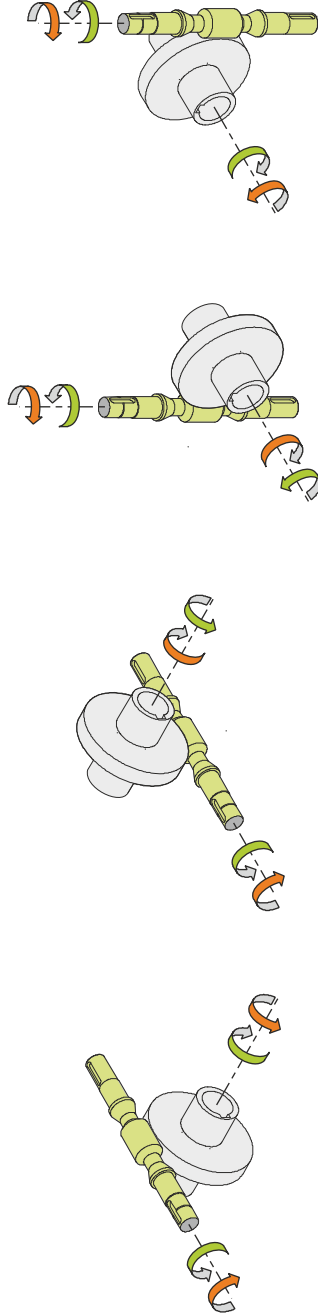
This gear unit is provided with an elastic coupling motor fitting



Mounting positions

B3	B6	B7	B8	V5	V6
					
0.35					
Lubricant type: Long life synthetic oil ISO VG320					
 Oil quantity [litres]					
					

Direction of rotation



Weight

Gear unit [kg]	9
----------------	---

Gearing data

Axial module	3.6
Number of starts	3
Lead angle	18° 38'
Pressure angle	20°

Backdriving

Static back-driving
Quick back-driving
Dynamic back-driving