




direct operated solenoid valves

coil 31 mm

general information	
ambient temperature	- 10°C to + 50°C
response time	6 - 18 ms
mounting	in any position
standard seal materials*	NBR, FPM, EPDM, FFKM
dimensions	see page 2/2
coil data	see page 2/2
connector data	see page 2/2

* other seal materials on request

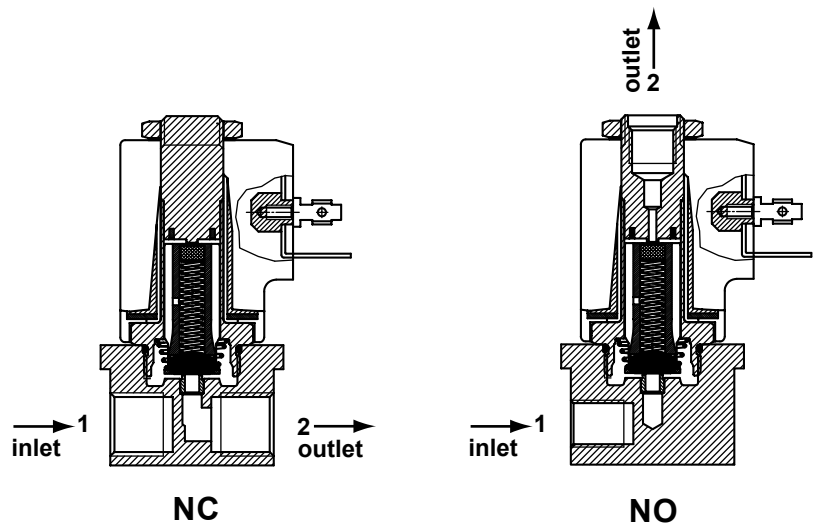

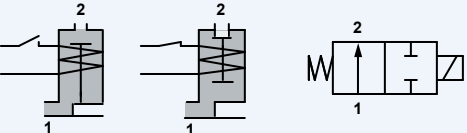function	symbol	orif. mm	*Kv	pressure range (bar)			nominal power			TABLE A
				min.	max. DC	max. AC	Watt DC	V.A. AC		main code
								inr.	hol	
2/2 normally closed (NC) 	0.8	0.5	0	60	80	10	21.5	13.5	Q2U108	
	1.2	1.3	0	45	70	10	21.5	13.5	Q2U112	
	1.6	1.7	0	35	60	10	21.5	13.5	Q2U116	
	2.4	3.5	0	15	30	10	21.5	13.5	Q2U124	
	3.0	4.5	0	10	18	10	21.5	13.5	Q2U130	
	4.0	7.5	0	3	8	10	21.5	13.5	Q2U140	
	6.0	12.0	0	0.7	2.5	10	21.5	13.5	Q2U160	
2/2 normally open (NO) 	0.8	0.5	0	40	40	10	21.5	13.5	Q2U208	
	1.2	1.1	0	35	35	10	21.5	13.5	Q2U212	
	1.6	1.4	0	20	20	10	21.5	13.5	Q2U216	
	2.4	3.0	0	10	10	10	21.5	13.5	Q2U224	
	3.0	3.5	0	8	8	10	21.5	13.5	Q2U230	

*l/min. of water with ΔP of 1 bar

order code

Q 2 U . S 0 . 6

main code

see table A
on this page

seals

code	material
B	NBR
V	FPM
E	EPDM
K	FFKM

manual override

code	type
0	none

coil code

see table B
on page 2/2


FLO CONTROL

Solenoid Valves



direct operated solenoid valves

coil 31 mm

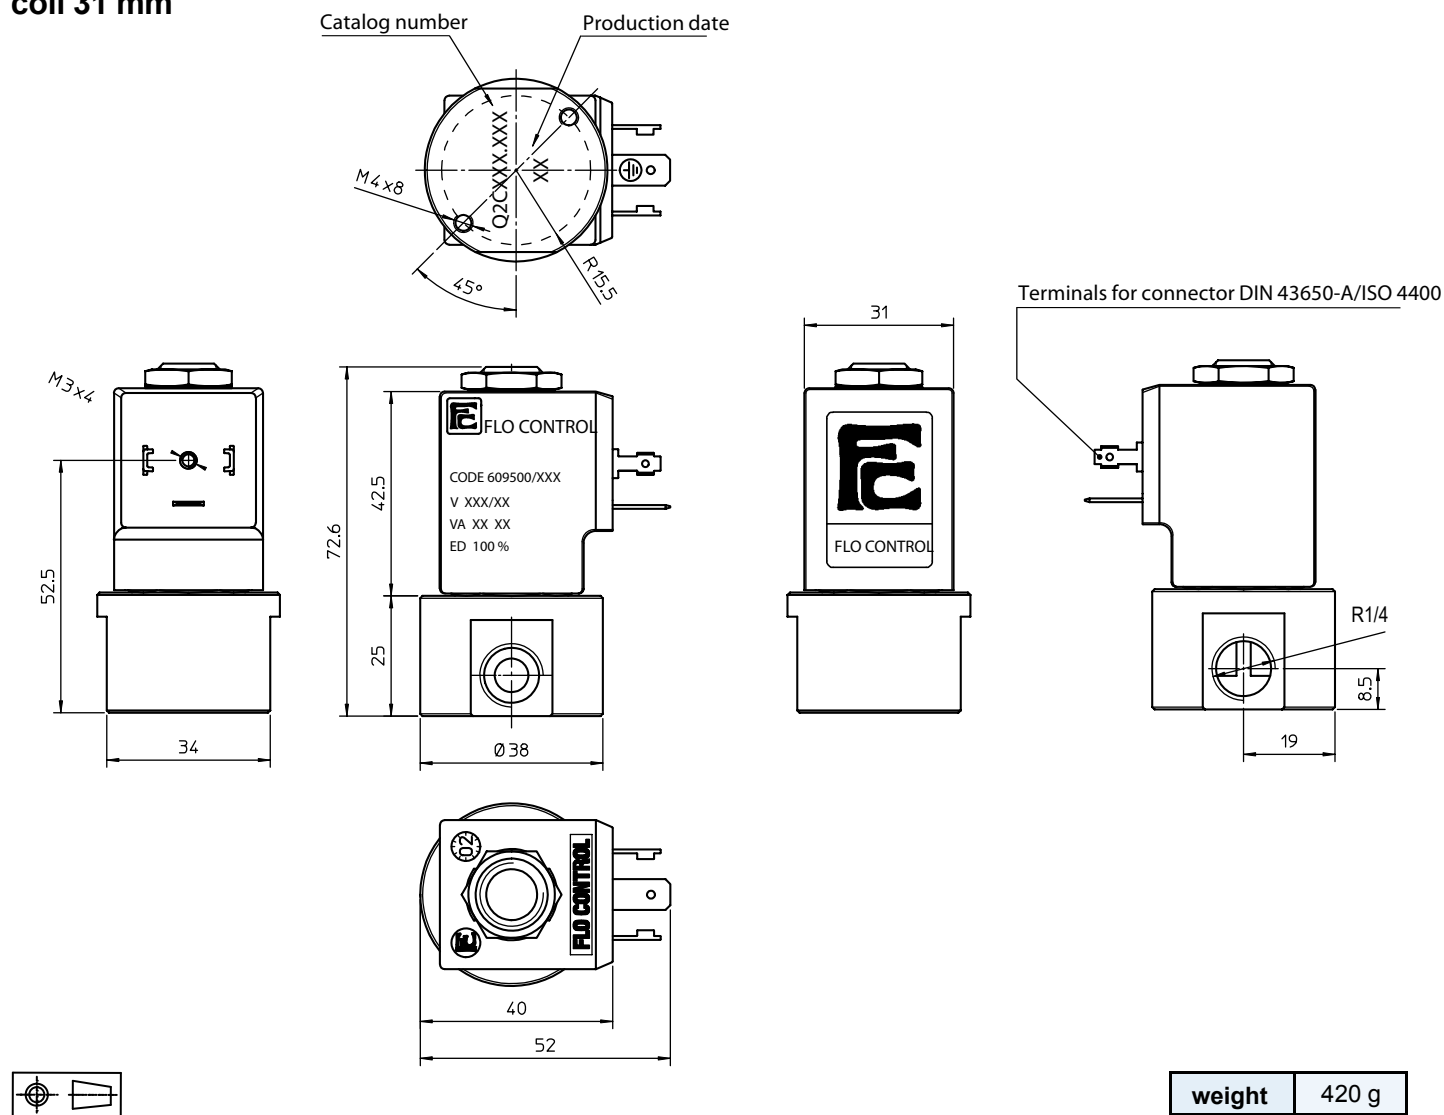

weight	420 g
--------	-------

coil code	TABLE B			
	*voltages	code		
		~ 50 Hz	~ 60 Hz	= DC
	12	-	-	666
	24	611	644	671
	48	616	-	676
	110	621	-	681
	115	-	653	-
	220	631	-	-
	230	638	659	-
	380	640	-	-

* other voltages and wattages on request

coil specification	
wire insulation	class H180° C
encapsulation	class F155° C
encapsulation mat.	nylon
energising duration	100% at +20° C ambient
voltage tolerance	- 10% +15% of nominal voltage
*power consumption	AC 13,5 VA - DC 10 Watt
electrical connection	DIN 43650/A (2P+ earth)
cable connection	Pg 9 (for cable dia. 6-8mm)
protection class	IP 65 (with connector)

connector (not included, must be ordered separately)

code	Z10031
------	--------

FLO CONTROL

Solenoid Valves

