YOUNG TECH FRANCE
www.ytc-france.fr

Solenoid Valve H-700

Product Number: H-700


Model	Acting / Valve type	Connection	Conduit	Power source
H-700	RP 3 / 4 Ways	C ¼" NPT	T ½" G	001 24 V (DC)
		D ¼" G	U ½ PT	002 110 V (AC)
				003 220 V (AC)




3 way / 4 way

Item - Type		3 ways / 4 ways	
Supply Pressure		0,1→1MPa	
Flow Capacity (Cv)	Output	0,2(Φ3) @ 0,4	0,75
		0,84(Φ1,6) @ 0,7	
	Exhaust	0,09	
Rating Current	220VAC	60mA (11W)	30mA (6,6W)
	110VAC	130mA (12W)	50mA (5,5W)
	24VDC	580mA (14W)	160mA (3,8W)
Frequency		50-60Hz	
Explosion Proof		Ex d IIC T6	
Connection - Air		(N)PT1/4"	
Conduit		PF(G)1/2"	
Coil Insulation Grade		Class E	
Temperature	Standard	-20→70°C	
	Explosion	-20→50°C	
Weight		0,8 kg	0,9 kg



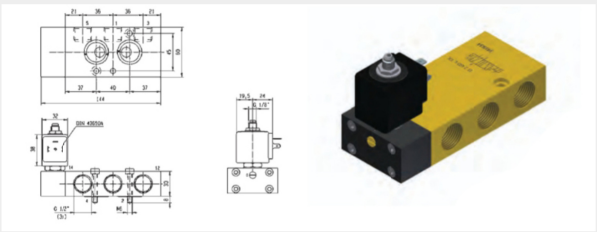

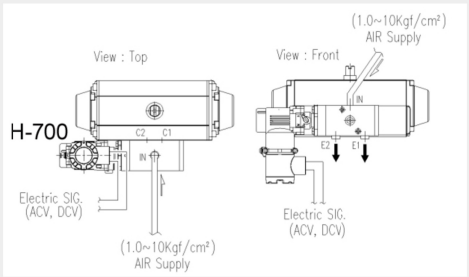

The solid and robust design is rated up to 20 million of life cycles which makes this product extremely reliable either for low and high frequency applications. This product solution modularity in combination with our ATEX coils program can optimize the total ownership costs delivering high reliability, extreme flexibility and best competitiveness.

H-700 opens and shuts by electrical signal (AC or DC). It is build as explosion-proof structure.
Manual override switch
Interchangeable coils