
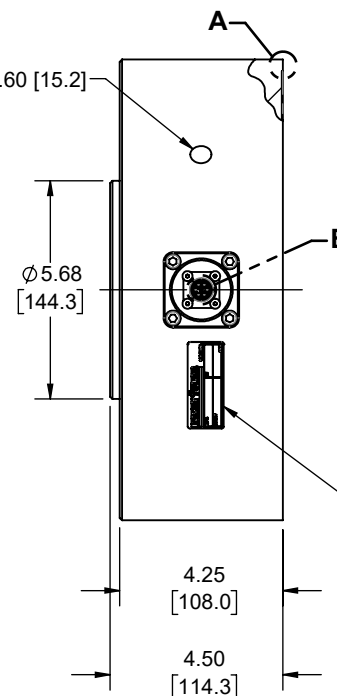

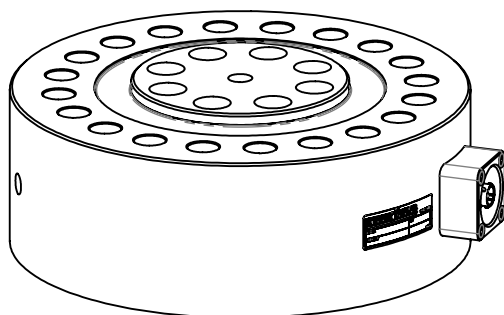



LOAD CELL CHARACTERISTICS		
CAPACITY	220K (lbf)	1000kN, 1200kN


Interface Inc. claims proprietary rights in the information disclosed hereon. This drawing is furnished in confidence on the express understanding that neither it nor any reproduction thereof will be disclosed to others or used for the purpose of manufacture or procurement of the article or part shown hereon without written permission of Interface Inc. The drawing shall remain the property of Interface Inc. and shall be returned upon request by Interface Inc.

80524

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/05/05	
B	ADDED 1000KN CAPACITY; REDRAWN & UPDATED TO CURRENT STANDARDS	1/26/2017	BB
C	REPLACED CONN PROTECTOR	9/19/2017	CS
D	ADDED 220K CAPACITY	09/15/2021	CARLOS S.

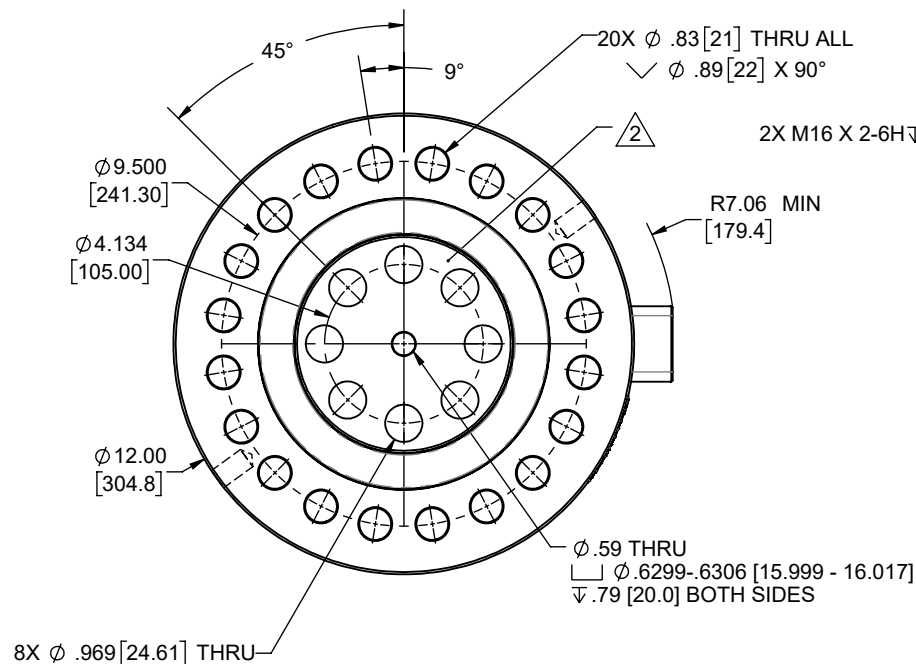

IDENTIFICATION LABEL INCLUDING:
MODEL, CAPACITY,
SERIAL NUMBER &
OUTPUT

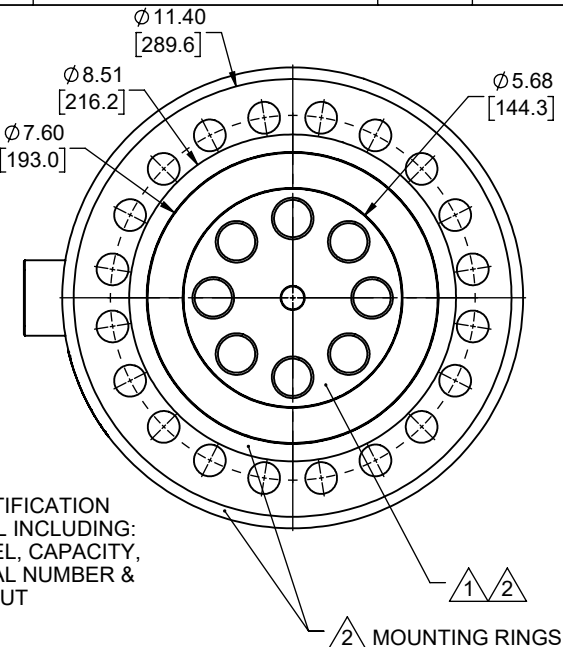

- 2 DO NOT PAINT.
- 1 FLANGE BOLT SURFACE BELOW FLEXURE MOUNTING RINGS .03 [0.8].

CONNECTOR PINOUT	
PIN	FUNCTION
A	+ EXCITATION
B	+ OUTPUT
C	- OUTPUT
D	- EXCITATION
E	- SENSE
F	+ SENSE
TENSION UPSCALE	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [mm] TOLERANCES ARE: ANGLES ± 0° 30' .XX ± .01 [0.25] .XXX ± .005 [0.13]	
CREATOR	DATE
DESIGNED:	
DETAILED: JEP	12/28/2004
WEIGHT: (APPROX) 102 (lbs)	

interface ADVANCED FORCE MEASUREMENT 7401 E. BUTHERUS DR. SCOTTSDALE, AZ USA 85260	
TITLE: OUTLINE MODEL: 1258 FLANGE MOUNT HUB	
SIZE: A	DWG. NO: 80524
SCALE: 1:5	SHEET 1 OF 1
REV: D	

CAD FILE <N:\-80524.SLD***>