


Vario Clamp

Lightweight design, self-locking type, stepless adjustable opening angle, with hand lever, clamp arm in steel design as standard

V/V2 40 LW ZL/ZR
10°-110°

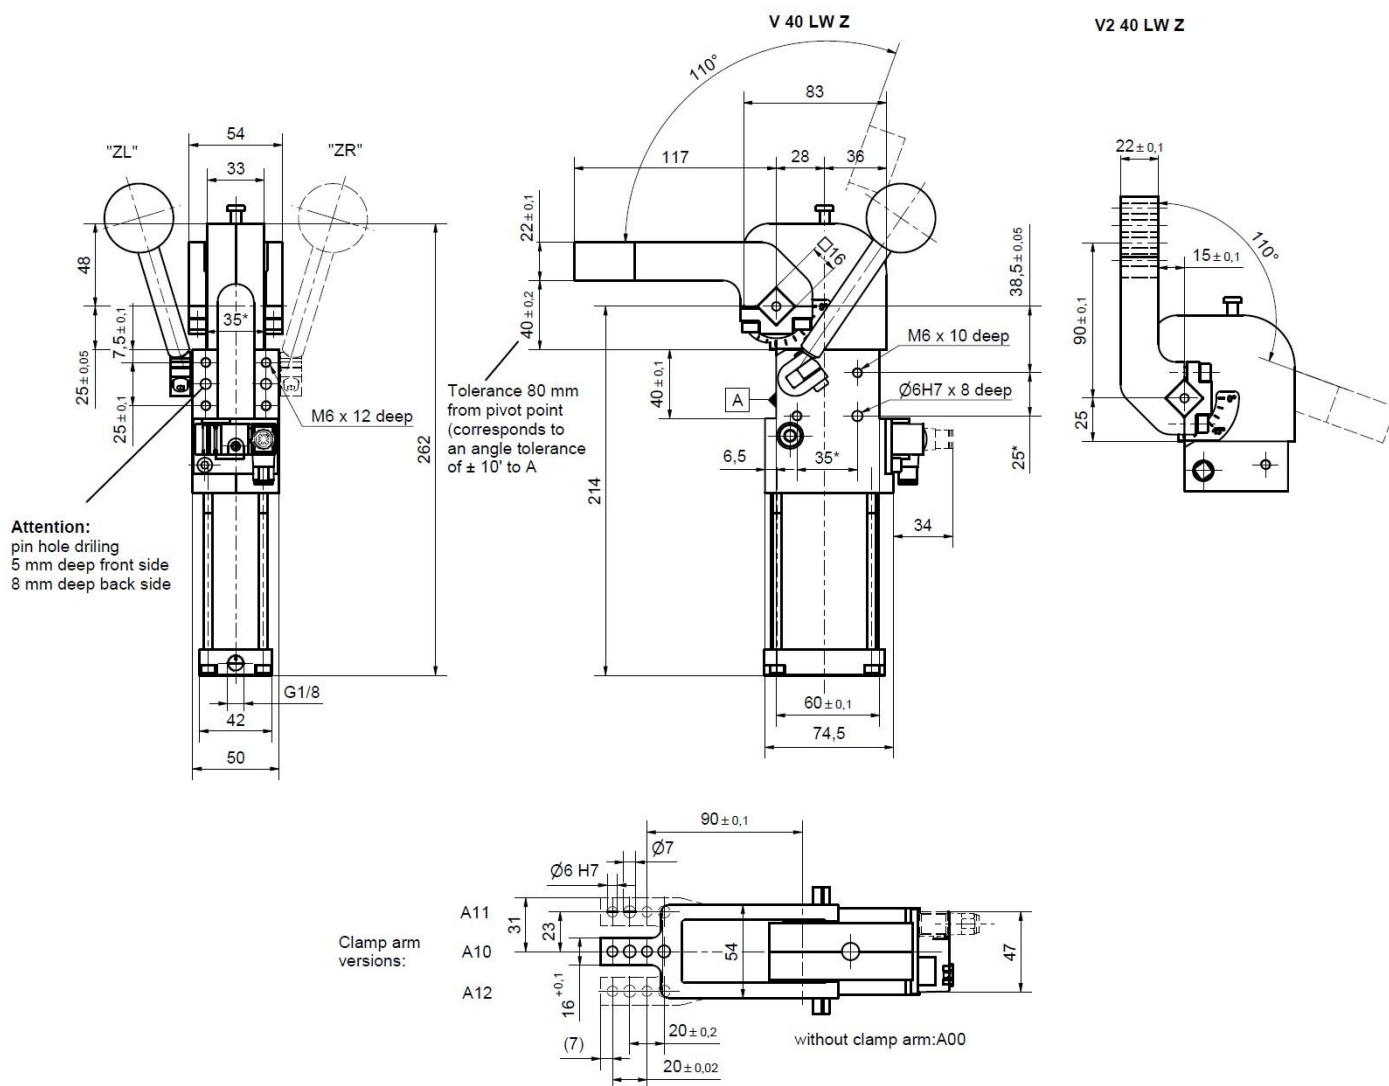

Ordering example:

V 40 LW ZL A10 T12

V 40 LW:

ZL:

Type
With hand lever left
(ZR = hand lever right)
A10: Clamp arm version steel (standard)
T12: Sensing system

Ordering codes TÜNKERS sensing systems:

...T00 Without sensing
...T12 Inductive sensor 24 V, 1 output with integrated LED's

Attention!

Aluminum clamp arms may only be loaded with clamping moment!

*Tolerance for dowel holes $\pm 0,02$, for threaded holes $\pm 0,1$.

A 5/3 way valve is required, central position de-aerated.

Medium: Air, max. 6 bar, operation permitted with oil-free air.

Attention!

External throttle check valves must be provided on assembly.
They are not included in the scope of delivery!

Type	Weight (kg)
V/V2 40 LW Z A00	1.87
Clamp arms:	
A10 Steel clamp arm incl. flange and fixing material	0.50
AL10 Aluminum clamp arm incl. flange and fixing material	0.24
A50 Steel clamp arm incl. flange and fixing material	0.65
AL50 Aluminum clamp arm incl. flange and fixing material	0.28
Flange:	
Alu 2 pcs complete	0.04
Steel 2 pcs complete	0.08

Type	Holding torque max.	Clamping moment at 5 bar	Piston Ø	Weight ~ (kg)
V/V2 40 LW Z..	380 Nm	120 Nm	40	1.84

