
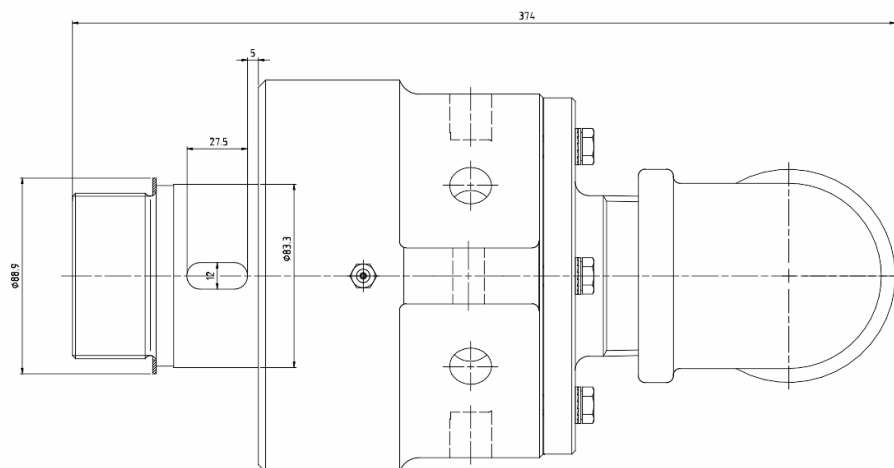
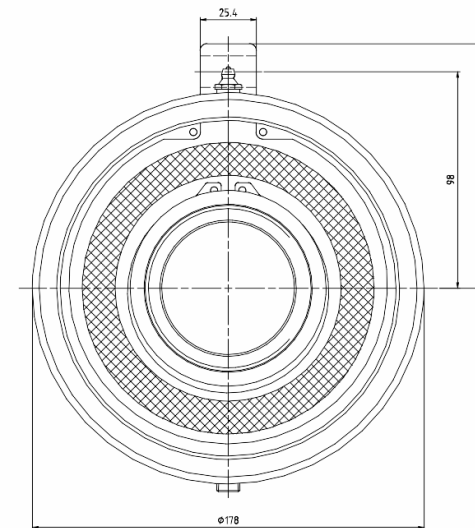


- NOTES:
- CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM FOR INSTRUCTION MANUAL: 040-561.
 - FITTING TO BE ASSEMBLED HAND-TIGHT.
 - TORQUE LUG PROVIDED FOR ANTI-ROTATION. DO NOT RESTRICT MOVEMENT OF UNION.
 - GASKET THICKNESS.

CONFIDENTIAL
THIS DOCUMENT CONTAINS DEUBLIN'S PROPRIETARY INFORMATION. IT IS TO BE KEPT SECRET AND NOT TO BE DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF DEUBLIN.

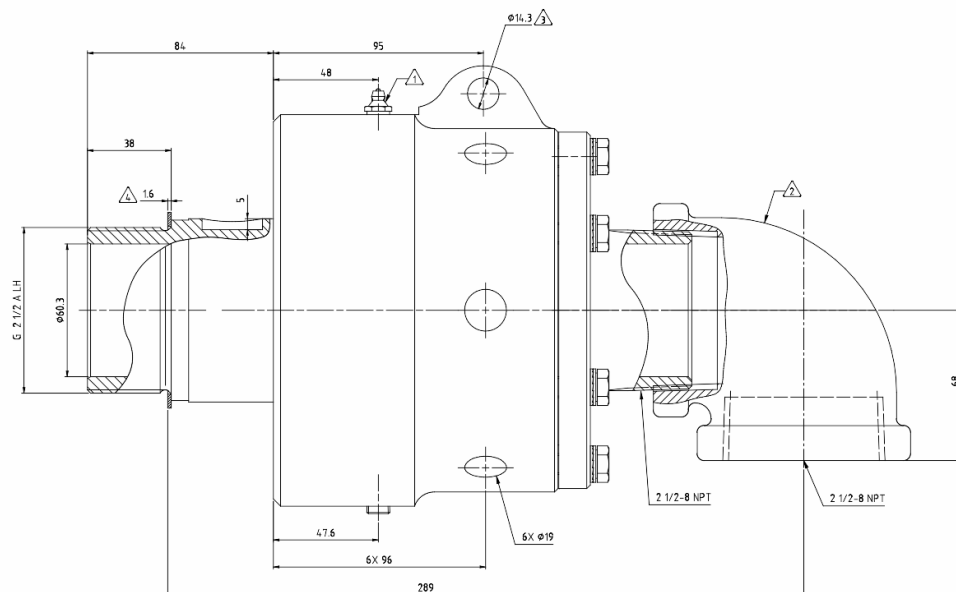

OPERATING DATA

MEDIA	WATER
PRESSURE MAX.	10 bar
SPEED MAX.	750 min ⁻¹
TEMPERATURE MAX.	121 °C
DRY RUN (WITHOUT ANY MEDIA)	NO
RECOMMENDED FILTRATION	60 micron
FLOW MAX.	939 L/min
TORQUE	9.5 Nm



DEUBLIN
Manufacturing Union Division



PROJECTION
DATE: NAME:
BY: /REV: /
CHK: /
APP: /



SCALE: 1:1
MATERIAL:

INTERFACE CONTROL DRAWING

TITLE
DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung

NO. 6250-001-123

SHEET
A1