


Trimod Besta

Trimod Besta Füllstandschalter

Trimod Besta Level Switch

Trimod Besta Contrôleur de niveau

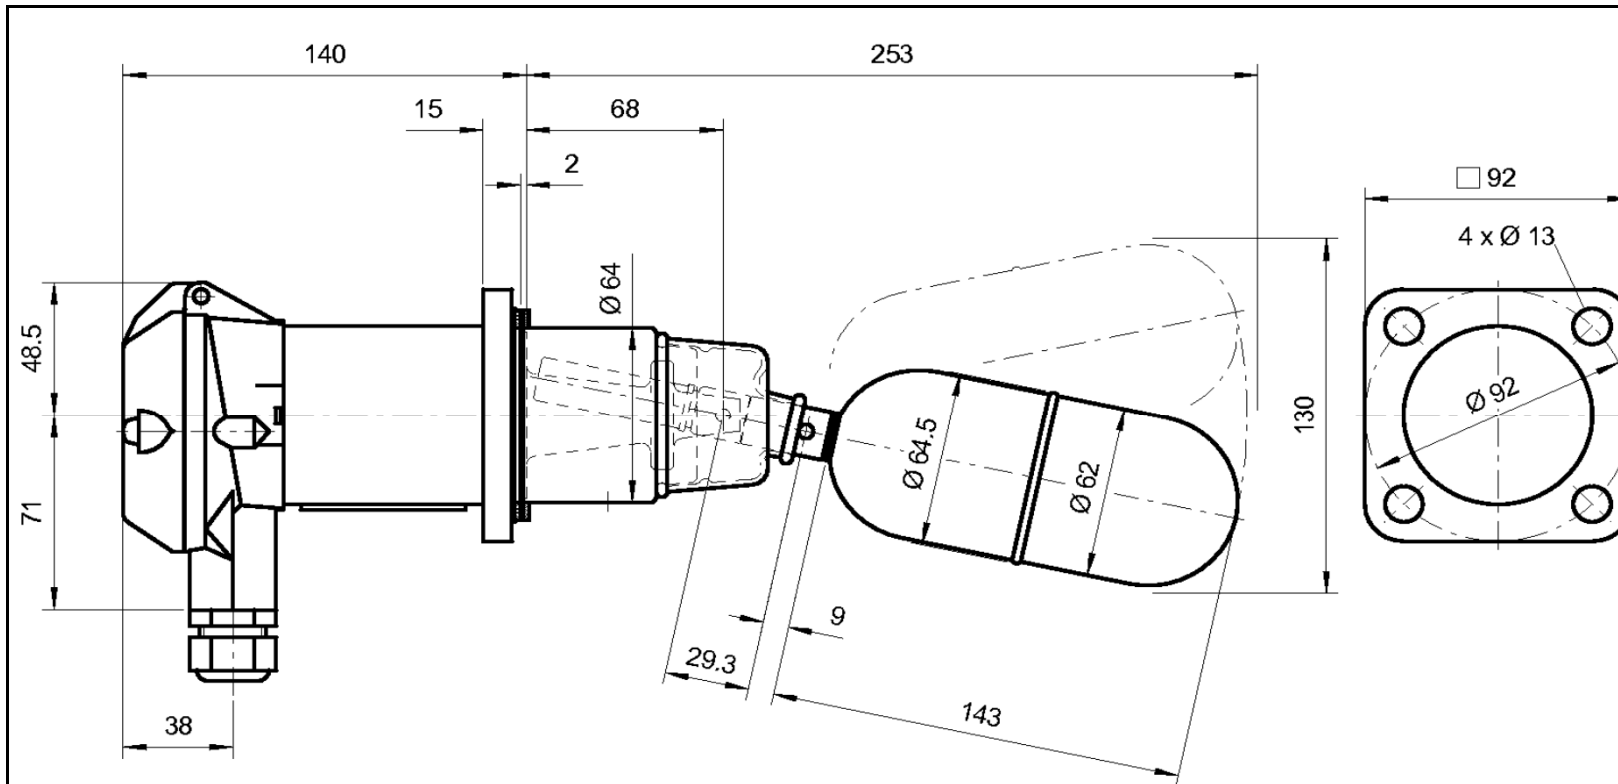

Certificate no: EPS 12 ATEX 1430 X

Gasket Ø77/64x2 Blue Gard 3000

Type	Schaltmodul	Flanschmodul	Schwimmermodul
Type	Switch module	Flange module	Float module
Type	Module de commande	Module de bride	Module de flotteur
Betriebstemperatur	Gehäusematerial	Nennndruck / -weite	Schalttdifferenz
Operating temp.	Housing material	Nom. Pressure / -Diameter	Operating diff.
Temp. de service	Matériau boîtier	Pression- / Section Nominal	Différentiel
Umgebungstemp.	Kabeleinführung	Norm	Dichte min.
Ambient temp.	Cable entry	Standard	Density min.
Temp. d'ambiance	Presse-étoupe	Norme	Densité min.
Schaltleistung	Schutzart	Dichtungsart	Prüfdruck
Switch rating	Enclosure	Flange Facing	Test pressure
Pouvoir de coupure	Cl. de protection	Type d'étanchéité	Pression d'épreuve

Safety Integrity Level:	SIL 1 (SIL 3 Capable)
Dimensionen / Dimensions	mm
Überwurfflansch	Slip-on flange
Bride folle	---
Schmelze / Heat no:	
Bachofen-Nr. / Bachofen no:	
Fixflansch	1.4408
Fixed flange	
Bride fixe	
Schmelze / Heat no:	
Bachofen-Nr. / Bachofen no:	
Schwimmer / Balg	1.4571
Float / Bellow	Perbunan
Flotteur / Soufflet	
Order no.	
Stk./ pcs./quant.	
Date/Visa	27.04.16 / TSI
BACHOFEN Industrial Automation	
Bachofen AG, Ackerstrasse 42 CH-8610 Uster/Switzerland Phone +41 44 944 11 11 Fax +41 44 944 12 33 info@trimodbesta.com www.trimodbesta.com	
011015/TSI	