




Typ: **AKSG 560 K.5HF B1**
Bauform 1 in Förderrichtung A
Art.-Nr.: E61-56503



Kennlinie:

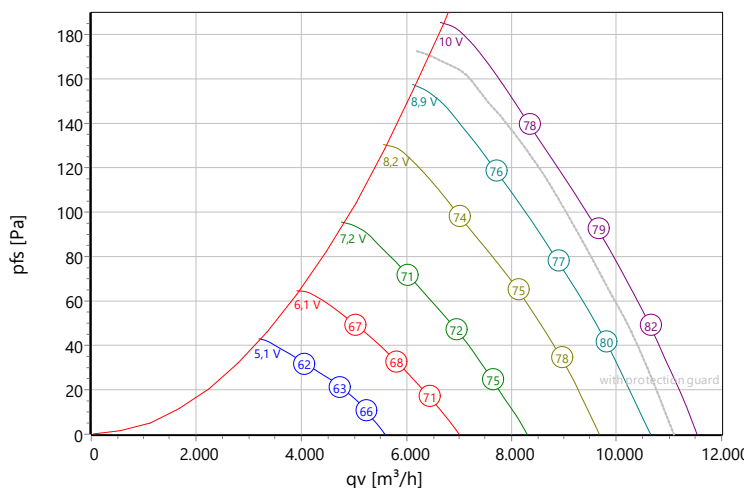

ρ : 1,15 kg/m³ ; Data @ 230 V


Nennndaten:

U [V]	f [Hz]	Data @ [V]	P _{ed} [kW]	I _N [A]	n _N [U/min]	t _R [°C]	k ₁₀ [m²s/h]	Eff.-Klasse	IP	m [kg]
1~200-277	50/60	230	1	4,4	1250	-25 .. +60	-	IE4	IP 54	-


Schalldaten:

Frequenz	Σ	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Entfernung	1 m	4 m
LwA(A,in) [dB(A)]	-	-17	-13	-9	-7	-6	-6	-10	LpA(A,in) [dB(A)]	-7	-17

Schaltbild:

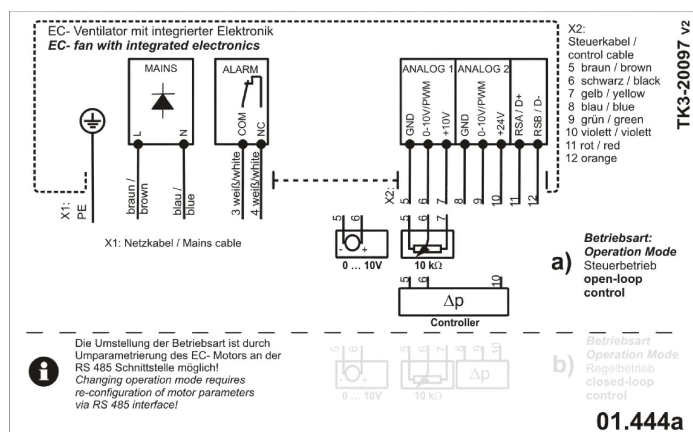


Zeichnung:

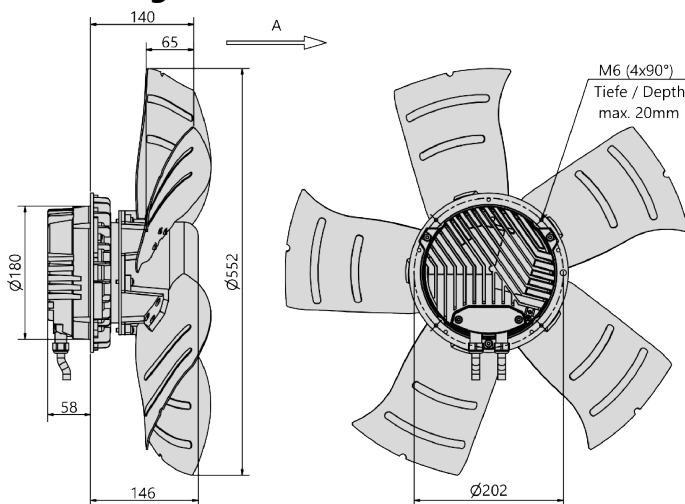

Data @ 208V; 4,9 A; 1250 1/min / ErP-Daten @ Axial Bauform A6 mit Schutzgitter
Achtung: Hochlaufzeiten je nach Motor-Laufzeit – Kombination, Motorauslastung und Betriebszahl bis zu ~ 20 – 60 sec.
Bitte bei der Projektierung beachten (bspw. bei Verflüssigereinheiten in Kältekreisläufen)!



Typ: **AKSG 560 K.5HF B1**
 Bauform 1 in Förderrichtung A
 Art.-Nr.: E61-56503

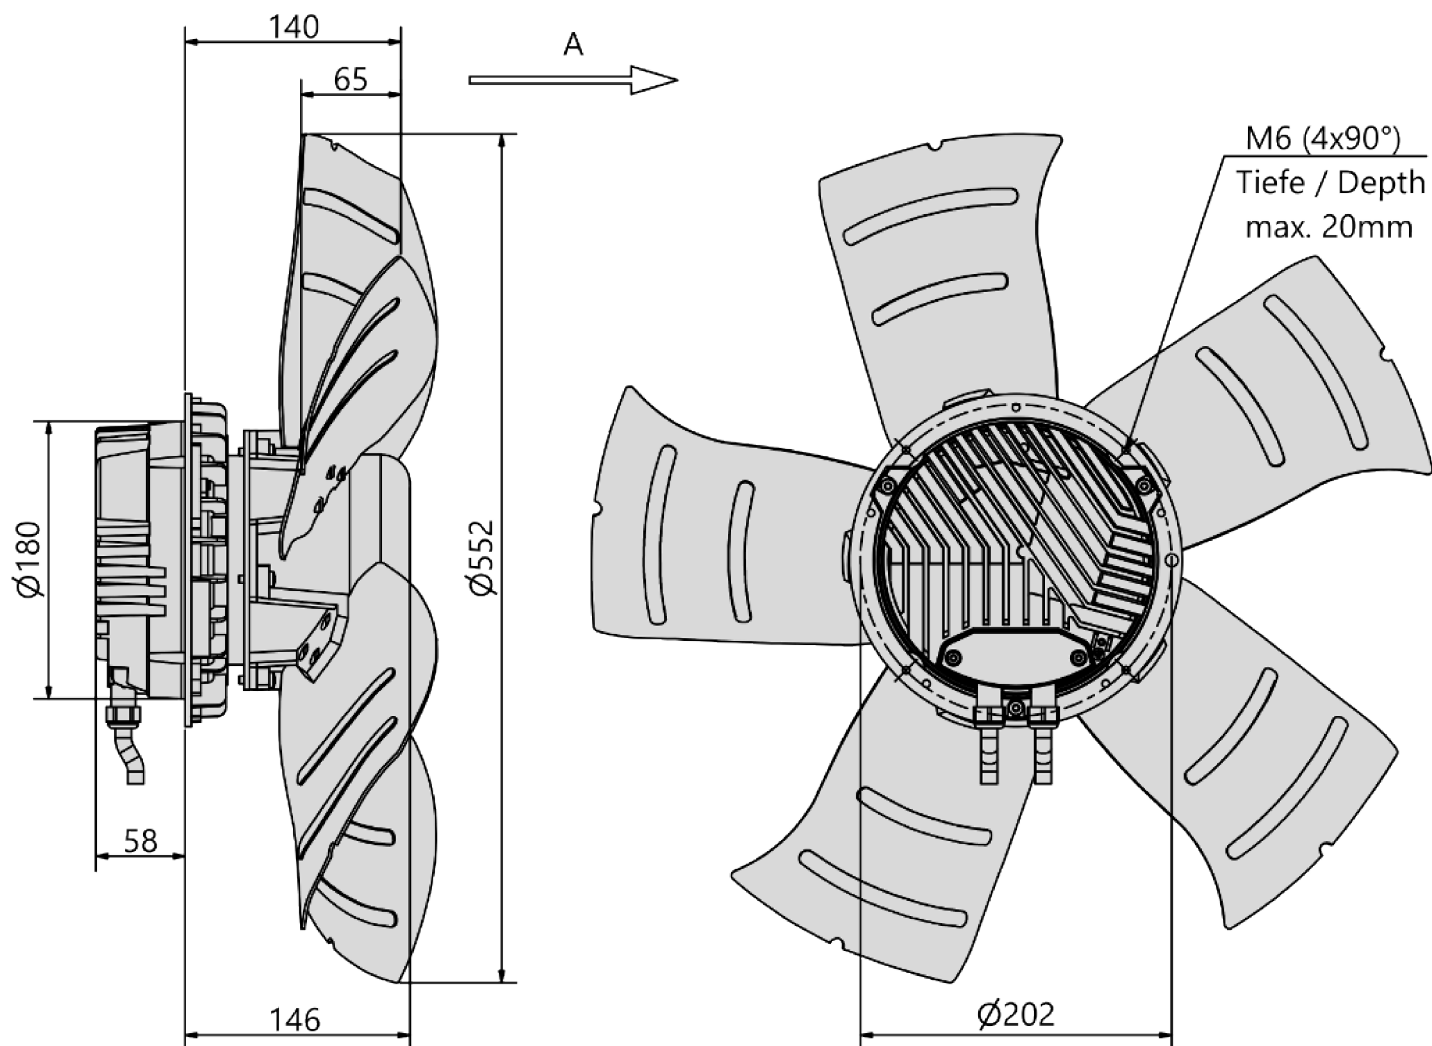



Typ: **AKSG 560 K.5HF B1**
 Bauform 1 in Förderrichtung A
 Art.-Nr.: E61-56503

