




MVE 3800/15D-75C1 (ED40380075C1JA0000)

3 PH - 4 poles - 1500 RPM - 220-240/380-415 V - 50 Hz

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power factor	Ia/In
306,69	153,35	3853	220-240/380-415	2,3	Δ 7,09 Y 4,1	0,8	6,8

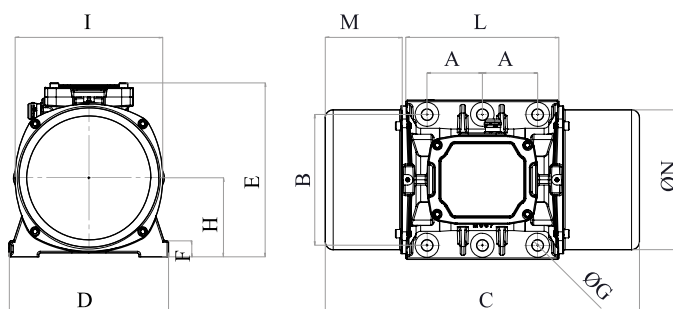

*Technical drawings are illustrative purposes only, please refer to 2D/3D drawings available on "FINDER" app.
Contact us for more information.

OVERALL DIMENSIONS (mm)													
Weight [Kg]	A	B	G	Holes number	C	D	E	F	H	I	L	M	N
136	105	248	22	6	596	302	330	30	150	280	304	156	265

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Nm]	Cable type	Cable gland
Please refer to the label on the motorvibrator	Yes	M20	21 x 37 mm	550	4G6 115°C	3/4" NPT 115°C

BEARINGS LIFE HOURS				
Bearing model	Type	100% C.F	80% C.F	50% C.F
NJ 2312		28911	60827	>100000

CERTIFICATION	
ATEX II 2G Ex db IIB T4 Gb, II 2D Ex tb IIIC T135°C Db IECEx Ex db IIB T4 Gb Ex tb IIIC T135°C Db UL CLASS I Div.1 GROUP C,D T4 T.Amb -20/+60°C IP66	

REV.6-03/05/2023

