


SPV-50 160.0 C [SPV151C07B15AZ]

3 PH - 6 poles - 1000 RPM - 380-405/660-700 V - 50 Hz

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power factor	Ia/In
3140	1570	17550	380-405/660-700	13,8	Δ 13,85 Y 8	0,95	6

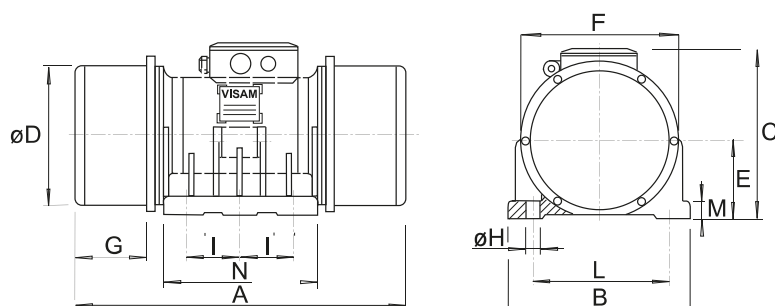

*Technical drawings are illustrative purposes only, please refer to 2D/3D drawings available on "FINDER" app.
Contact us for more information.

OVERALL DIMENSIONS (mm)													
Weight [Kg]	H	I	L	Holes number	A	B	C	D	E	F	G	M	N
610	38	155	400	6	1,018	520	504	451	255	500	218	40	447

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Nm]	Cable type	Cable gland
/	No	M36	37 x 66 mm	1864	/	/

BEARINGS LIFE HOURS				
Bearing model	Type	100% C.F	80% C.F	50% C.F
NJ 2324		18353	38614	>100000

CERTIFICATION	
Atex II 3D Ex tc IIIC T140°C IP66	 

REV.8-05/01/2022

Dimension with coarse degree of accuracy related to UNI 22768/1 Rights reserved to modify technical specifications.

