


General purpose, side-entry velocity transducer with DC and temperature outputs. Made from robust stainless steel throughout for continuous vibration monitoring in harsh environments. Internal electronics are enclosed in a Faraday cage and isolated to minimise noise. Sealed to IP65 with industry standard 4-20mA output proportional to sensor and temperature range that can connect directly to PLC, DCS and other industrial controllers. Includes stainless steel overbraided ETFE cable and ¼"-28UNF, M6 or M8 mounting bolt.

MTN/2285STC



Dimensions

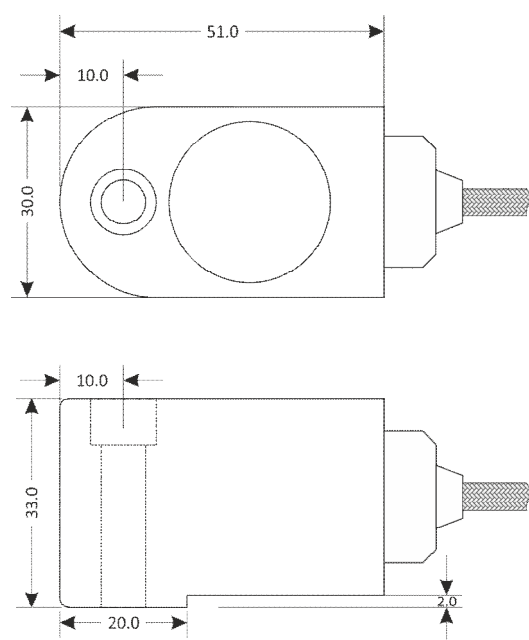

Applications

- Pumps, fans and compressors
- Building services
- Paper industry

Technical

Output current	4-20mA DC proportional to rms velocity (mm/s)
----------------	---

Temperature output	10mV/°C
--------------------	---------

Supply voltage range	12-32V DC (4-20mA)
----------------------	--------------------

Frequency response	2Hz to 800Hz ±10%
--------------------	-------------------

Mounted base resonance	5kHz (nominal)
------------------------	----------------

Isolation	Electronics in Faraday cage, isolated from body
-----------	---

Dynamic range	50g peak
---------------	----------

Transverse sensitivity	Less than 5%
------------------------	--------------

Operating temperature	-25 to 90°C
-----------------------	-------------

Temperature sensitivity	0.08%/°C
-------------------------	----------

Case material	Stainless steel
---------------	-----------------

Cable	Integral stainless steel overbraided ETFE - length to be specified at point of order
-------	--

Standard cable length	5m
-----------------------	----


Maximum cable length	100m
----------------------	------

Mounting torque	8Nm
-----------------	-----

Weight	440g (nominal)
--------	----------------

Sealing	IP65
---------	------

System connection

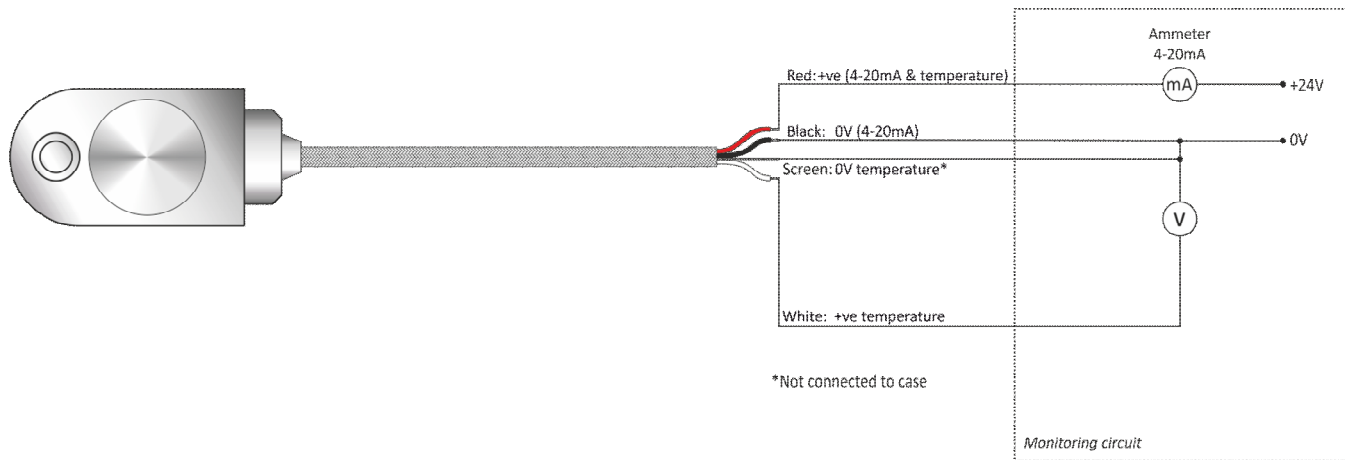

Options

- Filters
- Mounting threads
- Mating connectors and cable assemblies
- Other velocities (see below)

Part #	Mounting	xx = Optional velocity (mm/s rms)
MTN/2285STC-xx	¼" UNF Female	0-10
		0-20
MTN/2285STC-xx	M6 x 35mm	0-25
		0-50
MTN/2285STC-xx	M8 x 28mm	0-100