




A Brand of Max-Air Technology.

Limit Switches for Ordinary Locations


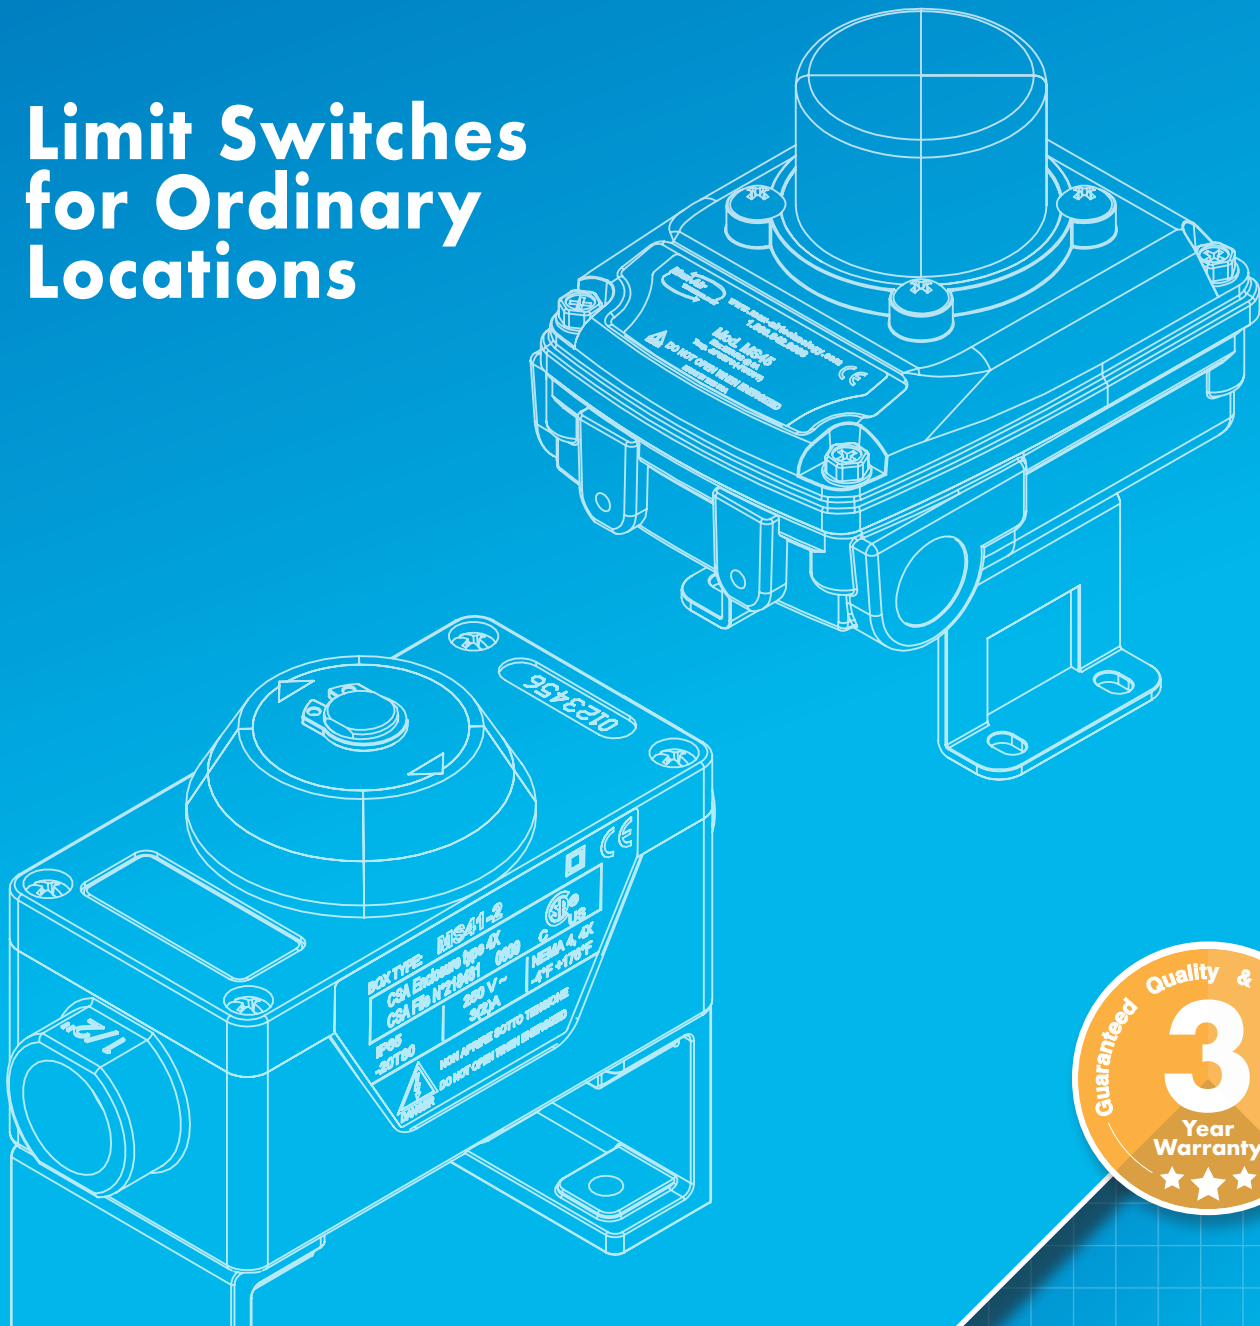


Limit Switches Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions

Limit Switches

Standard duty limit switch boxes available with mechanical, proximity, or inductive switches.

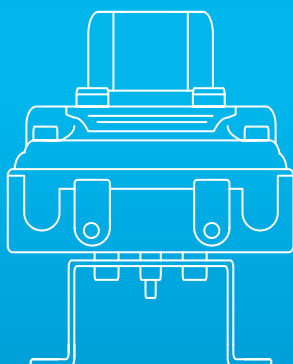

Max-Air limit switch boxes offer convenient and reliable switch feedback for actuated assemblies, for standard duty environments. The NAMUR standard mounting design is compatible with all Max-Air pneumatic actuators.

45 Series Part # Builder

A - ENCLOSURE	B - SERIES	-	C - CONDUIT ENTRIES	D - SWITCHES	E - INDICATOR TYPE	F - MATERIAL	G - SWITCH TYPE	H - BRACKET	I - BOARD TYPE
MS	45		1	2	0	M	0	3	-

Example Part # **MS45-120M03**

EXAMPLE DESCRIPTION: MECHANICAL LIMIT SWITCH, NEMA 4/4X, IP67 SERIES, 1/2" NPT (2 PLACES) CONDUIT ENTRIES, TWO (2) SWITCHES, STD OPEN/CLOSED YELLOW/TRED INDICATOR, ALUMINUM BOX, OMRON SS-5 OR SSG, SPDT, TA 250V SWITCHES & SENSORS, WITH U-BRACKET (30 X 80 X 30)

A - ENCLOSURE	B - SERIES	C - CONDUIT ENTRIES	D - SWITCH TYPE
North American Approvals MS = Mechanical IS = Inductive Proximity European Approvals BE = Mechanical PS = Magnetic BS = Inductive Proximity	45 = NEMA 4/4x/7/9, IP67 Class I, Division 1, Groups C And D; Class I, Division 1, Groupnnnnnnnnnb b bbbb C And D; Class II, Division 1, Groups E, F And G; Class Iii; Tcode T4a Ex D Iic T5 Gb; Ex Tb Iiic T108°C Db Class I, Zone 1, Aex D Iic T5 Gb; Class II, Zone 21 Aex Tb Iiic T108°C Db	1 = 1/2" NPT (2 Places) 2 = M20 X 1.5 (2 Places)	2 = Two (2) Switches 4 = Four (4) Switches (MS Type Only)

E - INDICATOR TYPE	F - MATERIAL	G - SWITCH TYPE			H - BRACKET
0 = STD, Open/Closed, Yellow/Red 2 = LPORT, 3way 3 = TPORT, 3way 4 = Arrow, 3way 5 = Open/Close, Red/Green	M = Aluminum, Black 7 = Stainless Steel	CODE	TYPE	DESCRIPTION	0 = None 3 = 30x80x30 Namur 6 = Universal Bracket A = MS-LSB-01 (30x80x20 Namur) B = MS-LSB-02 (30x80x30 Namur) E = MS-LSB-05 (30x130x30 Namur)
		0	MS	Silver Plated Mechanical Switches SPDT	
		S	MS	Gold Plated Mechanical Switches Spdt	
		0	PS	Low Power Magnetic Reed Switches Spdt	
		A	IS	IFM NS5002	
		B	IS	IFM IS5001	
		D	IS	IFM IS5026	
		E	IS	IFM IS0003	
		F	IS	P&F NJ2-V3-N	
		G	IS	P&F NBB2-V3-E2	
		H	IS	P&F NBB3-V3-Z4	
		K	IS	P&F Nbb2-V3-E3	
		L	IS	P&F Nbb2-V3-E0	
		N	IS	P&F Ncb2-V3-N0	

I - BOARD TYPE

BLANK = STANDARD 7-8-7-8 (SINGLE COIL SV)
1 = CIRCUIT BOARD 7-8-7-9 (DUAL COIL SV)
2 = CIRCUIT BOARD 7-8-9-10

*Note: 1) Not all combinations available, and special solutions not shown are possible. Please call factory for details.
2) Max-Air Technology reserves the right to change or modify products without prior notice & without incurring any obligation to make such changes on products previously or subsequently sold.



Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

41 Series Part # Builder

A - ENCLOSURE	B - SERIES	-	C - SWITCH	D - CONDUIT ENTRIES	E - INDICATOR TYPE	F - MATERIAL	G - SWITCH TYPE	H - BRACKET	I - BOARD TYPE
MS	41	-	2	I	S	T	0	T	-

Example Part # **MS41-21ST0T**

EXAMPLE DESCRIPTION: MECHANICAL LIMIT SWITCH BOX, TECHNOPOLYMER ENCLOSURE, NEMA 4/4X, 2 X SPDT MECHANICAL SWITCH W/ SILVER PLATED CONTACTS, 2 X 1/2" NPT CONDUIT ENTRIES, U-BRACKET, STANDARD ON/OFF INDICATOR BEACON, CSA/UL LISTED FOR ORDINARY LOCATIONS

A - ENCLOSURE	B - SERIES	C - SWITCH TYPE	D - CONDUIT ENTRIES
North American Approvals MS = Mechanical IS = Inductive Proximity European Approvals BE = Mechanical PS = Magnetic BS = Inductive Proximity	41 = Technopolymer Housing, NEMA Class I, Division 1, Groups C And D; Class I, Division 1, Groups C And D; Class Ii, Division 1, Groups E, F And G; Class Iii; Tcode T4a Ex D Iic T5 Gb; Ex Tb Iiic T108°C Db Class I, Zone 1, Aex D Iic T5 Gb; Class Ii, Zone 21 Aex Tb Iiic T108°C Db	2 = Two (2) Switches	1 = 1/2" NPT (2 Places) 2 = M20 X 1.5 (2 Places)

E - INDICATOR TYPE	F - MATERIAL	G - SWITCH TYPE			H - BRACKET
0 = STD, Open/Closed, Yellow/Red 2 = LPORT, 3way 3 = TPORT, 3way 4 = Arrow, 3way 5 = Open/Close, Red/Green	T = Technopolymer, Black	CODE	TYPE	DESCRIPTION	T = Technopolymer 30x80x30
		0	MS	Silver Plated Mechanical Switches Spdt	
		S	MS	Gold Plated Mechanical Switches Spdt	
		0	PS	Low Power Magnetic Reed Switches Spdt	
		A	IS	IFM NS5002	
		B	IS	IFM IS5001	
		D	IS	IFM IS5026	
		E	IS	IFM IS0003	
		F	IS	P&F Nj2-V3-N	
		G	IS	P&F Nbb2-V3-E2	
		H	IS	P&F Nbb3-V3-Z4	
		K	IS	P&F NBB2-V3-E3	
		L	IS	P&F NBB2-V3-E0	

I - SPECIAL OPTIONS


Blank = Standard 7-8-7-8 (Single Coil) SV

*Note: 1) Not all combinations available, and special solutions not shown are possible. Please call factory for details.

2) Max-Air Technology reserves the right to change or modify products without prior notice & without incurring any obligation to make such changes on products previously or subsequently sold.

Limit Switches

Standard duty limit switch boxes available with mechanical, proximity, or inductive switches.

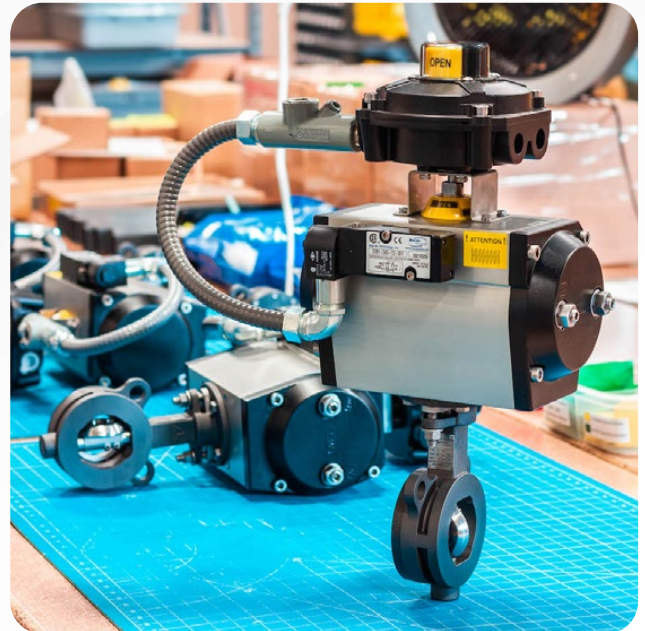

Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

Table of Contents

Pg - Description

[02 - Part Number Builder](#)

[05 - Table of Contents](#)

[06 - Features & Benefits](#)

[08 - Switch Types](#)

[10 - 45 Series Exploded Views, Materials, & Dimensions](#)

[12- 41 Series Exploded Views, Materials, & Dimensions](#)

[16 - Wiring Diagrams](#)

[18 - Standards, Certifications & Approvals](#)



3-YEAR LIMITED WARRANTY

Max-Air Technology Inc. | The Best Way to Automate Your Process

Max-Air Technology provides the following warranty regarding its products. THE WARRANTY STATED HEREIN IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES AND REPRESENTATIONS, EXPRESSED OR IMPLIED, OR STATUTORY, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. Max-Air Technology warrants its products shall be delivered free from defects in materials and workmanship when these products are used for the purpose for which they were designed and manufactured. Max-Air Technology does not warrant its products against chemical or stress corrosion or against any other failure other than from defects in materials or workmanship. The applicable warranty period is dependent on the clearly identified brand labeling.

The warranty period for Max-Air, Max-Electric, Delta T, and Sesto Valves brand labeled products is for thirty-six (36) months from the delivery date to the Purchaser.

Any claims regarding this warranty must be in writing and received by Max-Air Technology before the last effective date of the warranty period, failing which this warranty shall expire. Upon Max-Air Technology's receipt of a warranty claim, Max-Air Technology reserves the right to inspect the product(s) in question at either the field location or at Max-Air Technology manufacturing plant. If, after inspection of the product(s) in question, Max-Air Technology determines that the Purchaser's claim is covered by this warranty, Max-Air Technology's sole liability and the Purchaser's sole remedy under this warranty is limited to the refunding of the purchase price or repair or replacement thereof at Max-Air Technology's option. Warranty repair, replacement or re-performance by Seller shall not extend or renew the applicable warranty period. Max-Air Technology will not be liable for any repairs, labor, material or other expenses that are not specifically authorized in writing by Max-Air Technology, and in no event shall Max-Air Technology be liable for any direct, indirect or consequential damages arising out of any defect from any cause whatsoever. If any Max-Air Technology product is modified or altered at any location other than Max-Air Technology – Wentzville (Missouri) or Max-Air Technology – Agrate Brianza (MB) ITALY without the express written authorization of Max-Air Technology, it is expressly not covered by this warranty. The warranties and remedies are conditioned upon (a) proper storage, installation, use, operation, and maintenance of products, (b) Purchaser keeping accurate and complete records of operation and maintenance during the warranty period and providing Max-Air Technology access to those records, and (c) modification or repair of products only as authorized by Max-Air Technology in writing. Failure to meet any such conditions renders the warranty null and void. Max-Air Technology is not responsible for normal wear and tear. The warranty for such products shall be subject only to the warranty relief, if any, provided by the suppliers and/or manufacturers of such products.

Features & Benefits

Standard duty limit switch boxes available with mechanical, proximity, or inductive switches.

Standard Switch Feedback

Max-Air limit switch boxes offer convenient and reliable switch feedback for actuated assemblies, for standard duty environments. The NAMUR standard mounting design is compatible with all Max-Air pneumatic actuators.

Standard Features:

- Compact Design & Quick Set Cams
- 3D Models Available for All Designs and Sizes
- Easy Wiring Through PCB Terminal, 10pt.
- Single and Dual-Coil Solenoid Valve Options
- High Visibility Open/Close Beacon
- 3-Way T-Port & L-Port Beacon Options
- Inclusive 30x80x30 NAMUR Mounting Bracket
- Other Mounting Brackets Available



41 Series Technopolymer

Cost effective mechanical or non-contact switches with epoxy resin enclosure for ordinary locations.



45 Series Aluminum & Stainless

Mechanical or non-contact switch options for ordinary locations.

Locations	Ordinary, Hazardous, NEMA 4/4x
Materials	Aluminum, Stainless Steel
Ambient Temp. Range	-4°F to 140°F Standard (-40°F Low, 176°F High)
Switch Type	Mechanical, Inductive, & Magnetic

Voltages	AC/DC, Ordinary & Hazardous Locations
Mounting	NAMUR VDI/VDI 3845
Available Options	T-Port, L-Port, Special Beacons, Low Temp Option

Limit Switch Box Selection

Start from the top of the chart and work down to select the correct Limit Switch Box.

Environment	Standard			Corrosive		
	Ordinary	Hazardous		Ordinary	Hazardous	
Electrical Classification						
Temperature	Standard	Standard	Extreme (Low)	Standard	Standard	Extreme (Low)
Recommended Series/Options	41 Series	45 Series (BX) w/ Intrinsically Safe (Aluminum)	48 Series w/ Temp. Seals (Aluminum)	41 Series	45 Series (BX) w/ Intrinsically Safe (Stainless Steel)	48 Series w/ Temp. Seals (Stainless Steel)
	45 Series (Aluminum)	48 Series (Aluminum)		45 Series (Stainless Steel)	48 Series (Stainless Steel)	
Switch Types	Mechanical, Proximity, Inductive					
Available Options	T-Port Beacons, L-Port Beacons, Specialty Beacons, Brackets					

Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions




maxairtech.com

45 Series

The Max-Air 45 Series aluminum and stainless steel series limit switch boxes are an extremely reliable, robust, and time tested solution for your position monitoring needs. Switch boxes available with mechanical, proximity and inductive switch types, and fully certified to North American and European standards.

Specifications Table

Ingress Protection	IP67/NEMA4/4X	
Cable Entries	Standard 1/2" NPT (2 places), Optional M20x1.5 (2 places)	
Temp. Range	Standard (BUNA-N)	-4°F (-20°C) to 176°F (80°C)
Terminal Strip	10 Pt. Single Coil & 10 Pt. Dual Coil	
Weight	Aluminum 1.62 lbs (0.74 kg) & Stainless 3.94 lbs (1.79 kg)	
Approvals	See Table on Page 12	

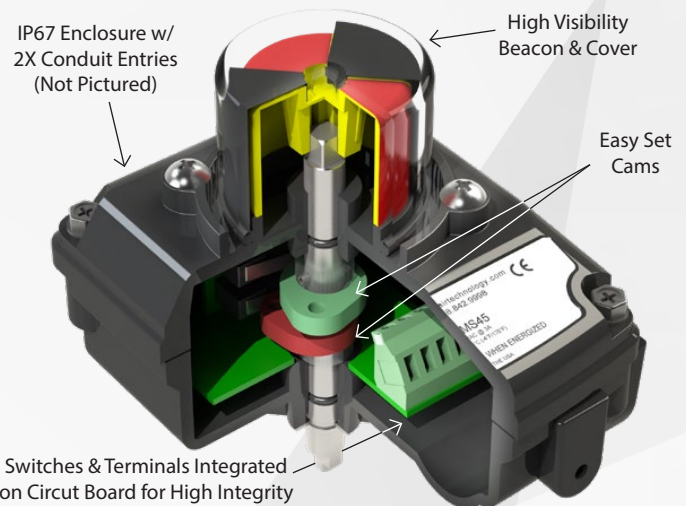


41 Series

The Max-Air 41 Series Technopolymer Limit Switch Box provides unparalleled position indication for rotary actuators. Manufactured completely in technopolymer with stainless steel fasteners CSA Listed, and carrying a NEMA 4/4X rating, these compact lightweight limit switches are an excellent choice for general corrosive environments.

Specifications Table

Ingress Protection	IP65/NEMA4/4X	
Cable Entries	Standard 1/2" NPT (2 places)	
Temperature Range	Standard (BUNA-N)	-4°F (-20°C) to 176°F (80°C)
Terminal Strip	10 Pt. Single Coil & 10 Pt. Dual Coil	
Weight	Technopolymer 0.75 lbs (0.34 kg)	
Approvals	See Table on Page 14	

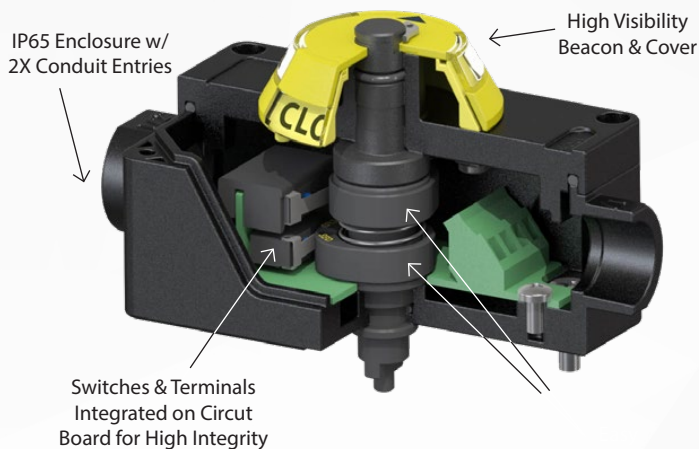

Switch Types

Mechanical, Magnetic Proximity, & Inductive Proximity

MS - Mechanical Switches

Mechanical switches are activated by pressing a spring return lever, and have physical contacts plated with a noble metal such as silver or gold. When energized contact is made, a small arc or spark can be produced within the housing of the switch that is not completely sealed off from the atmosphere. Mechanical switches are passive devices that do not require external power to operate.

41 Series / 45 Series



Code 0

Silver Plated Switches SPDT
Rating: 5A@125VAC, 3A@30VDC
Ambient Temp: -13°F to +185°F



Code S

Gold Plated Switches SPDT
Rating: 0.1A@125VAC, 0.1A@30VDC
Ambient Temp: -13°F to +185°F

48 Series



Code 0

Silver Plated Switches SPDT
Rating: 10A@125VAC, 6A@30VDC
Ambient Temp: -13°F to +185°F



Code S

Gold Plated Switches SPDT
Rating: 0.1A@125VAC, 0.1A@30VDC
Ambient Temp: -40°F to +180°F

PS - Magnetic Proximity Switches

Magnetic proximity switches are activated by the presence of a magnetic field, and have hermetically sealed physical contacts plated with a noble metal such as tungsten or rhodium. The encapsulated contact elements are completely isolated from the atmosphere, eliminating arcs or sparks and preventing corrosion. Magnetic switches are passive devices that do not require external power. Because the contacts are “non-sparking” and “non-contact”, magnetic type switches are commonly used in hazardous locations.

41 Series / 45 Series



Code 0

Low Power Reed Switches SPDT
Rating: 3W Max, 0.04A@120VAC, 0.20A@24VDC
Ambient Temp: -40°F to +221°F

Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

IS - Inductive Proximity

Inductive proximity switches are activated by the presence of a magnetic or ferritic target which disturbs the sensor's own magnetic field. Inductive switches are "active" devices which require external power and are available in a variety of configurations. Inductive type switches are inherently "non-sparking" and usually operate on low voltage DC power, making them well suited for intrinsically safe applications.

41 Series / 45 Series


	Code A IFM NS5002 2-Wire NC Switches Rating: 7.5-30VDC, Eexia Ambient Temp: -4°F to +158°F		Code B IFM IS5001 3-Wire PNP NO Switches Rating: 10-36VDC Ambient Temp: -13°F to +176°F
	Code D IFM IS5026 2-Wire Programmable Switches Rating: 5-26VDC Ambient Temp: -13°F to +176°F		Code E IFM IS0003 2-Wire NO Switches Rating: 20-140VAC/10-140VDC Ambient Temp: -13°F to +176°F
	Code F P&F NJ2-V3-N 2-Wire NC Switches Rating: 8.2VDC, Eexia Ambient Temp: -13°F to +212°F		Code G P&F NBB2-V3-E2 3-Wire PNP NO Switches Rating: 10-30VDC Ambient Temp: -13°F to +158°F
	Code H P&F NBB3-V3-Z4 2-Wire NO Switches Rating: 5-60VDC Ambient Temp: -13°F to +185°F		Code K P&F NBB2-V3-E3 3-Wire PNP NC Switches Rating: 10-30VDC Ambient Temp: -13°F to +158°F
	Code L P&F NBB2-V3-E0 3-Wire NPN NO Switches Rating: 10-30VDC Ambient Temp: -13°F to +158°F		Code N P&F NCB2-V3-N0 2-Wire NC Switches Rating: 8.2VDC, Eexia Ambient Temp: -13°F to +212°F

45 Series Technical Data

Exploded View, Materials of Construction, & Dimensional Data

45 Series

Exploded View & Bill of Materials

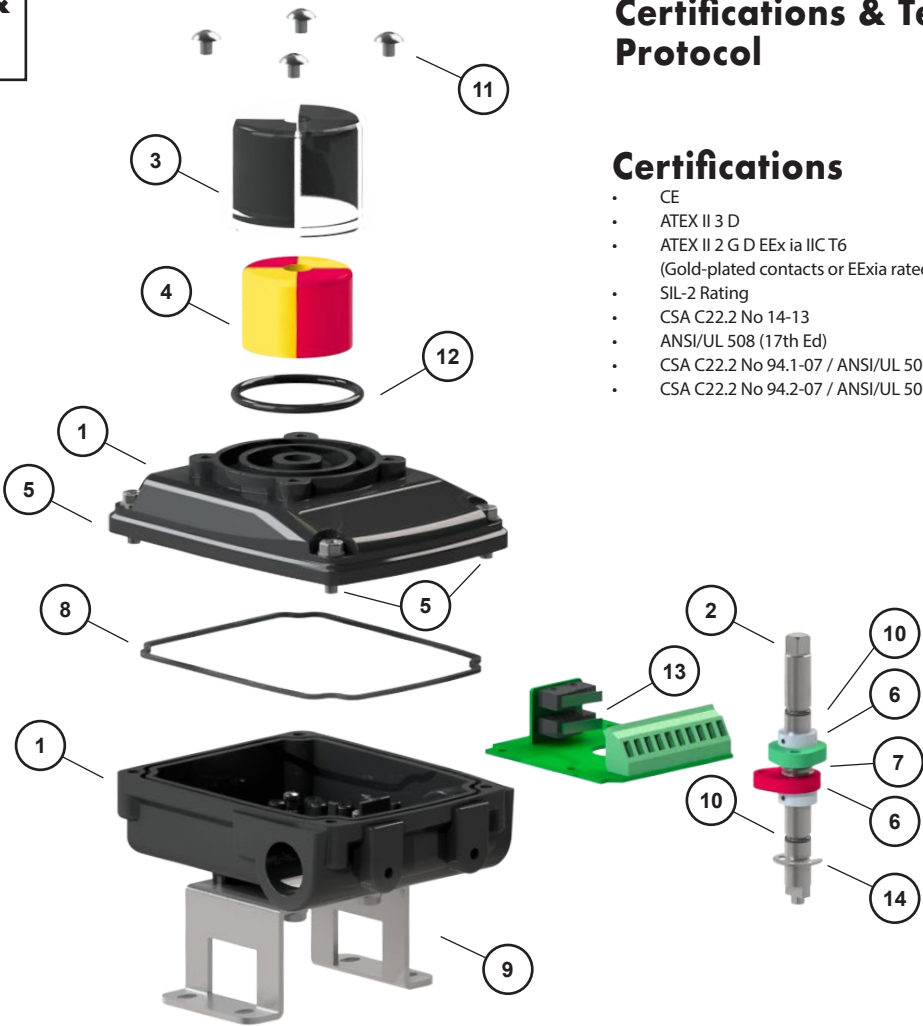

Certifications & Test Protocol

Certifications

- CE
- ATEX II 3 D
- ATEX II 2 G D EEx ia IIC T6 (Gold-plated contacts or EExia rated switches only)
- SIL-2 Rating
- CSA C22.2 No 14-13
- ANSI/UL 508 (17th Ed)
- CSA C22.2 No 94.1-07 / ANSI/UL 50 (12th Ed)
- CSA C22.2 No 94.2-07 / ANSI/UL 50E

#	DESCRIPTION	MATERIALS
1	Housing	Die Cast Aluminium AISI 316 Stainless Steel
2	Shaft	AISI 304 Stainless Steel AISI 316 Stainless Steel w/ Teflon Coating
3	Beacon Cover	Polycarbonate
4	High Visibility Beacon	ABS
5	Cover Bolts	Stainless Steel
6	Cams	ABS
7	Spring	Stainless Steel

#	DESCRIPTION	MATERIALS
8	O-Ring	NBR
9	Bracket	AISI 304 Stainless Steel AISI 316 Stainless Steel
10	O-Ring	NBR
11	Indicator Cover Screws	Stainless Steel
12	Indicator Cover O-Ring	NBR Low Temp Silicone (Optional)
13	PCB Board w/ Switches	Various
14	Shaft Retainer Ring	Stainless Steel




Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

45 Series

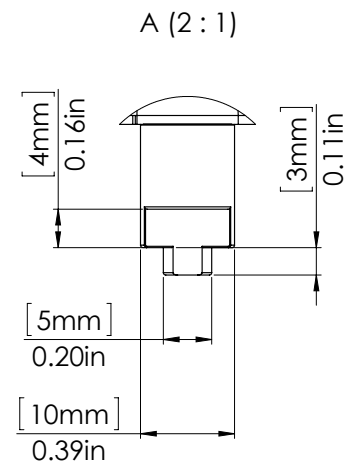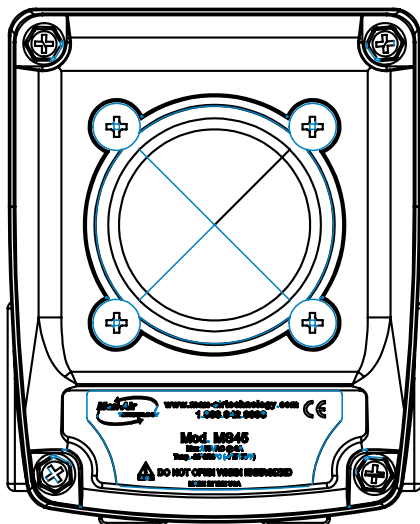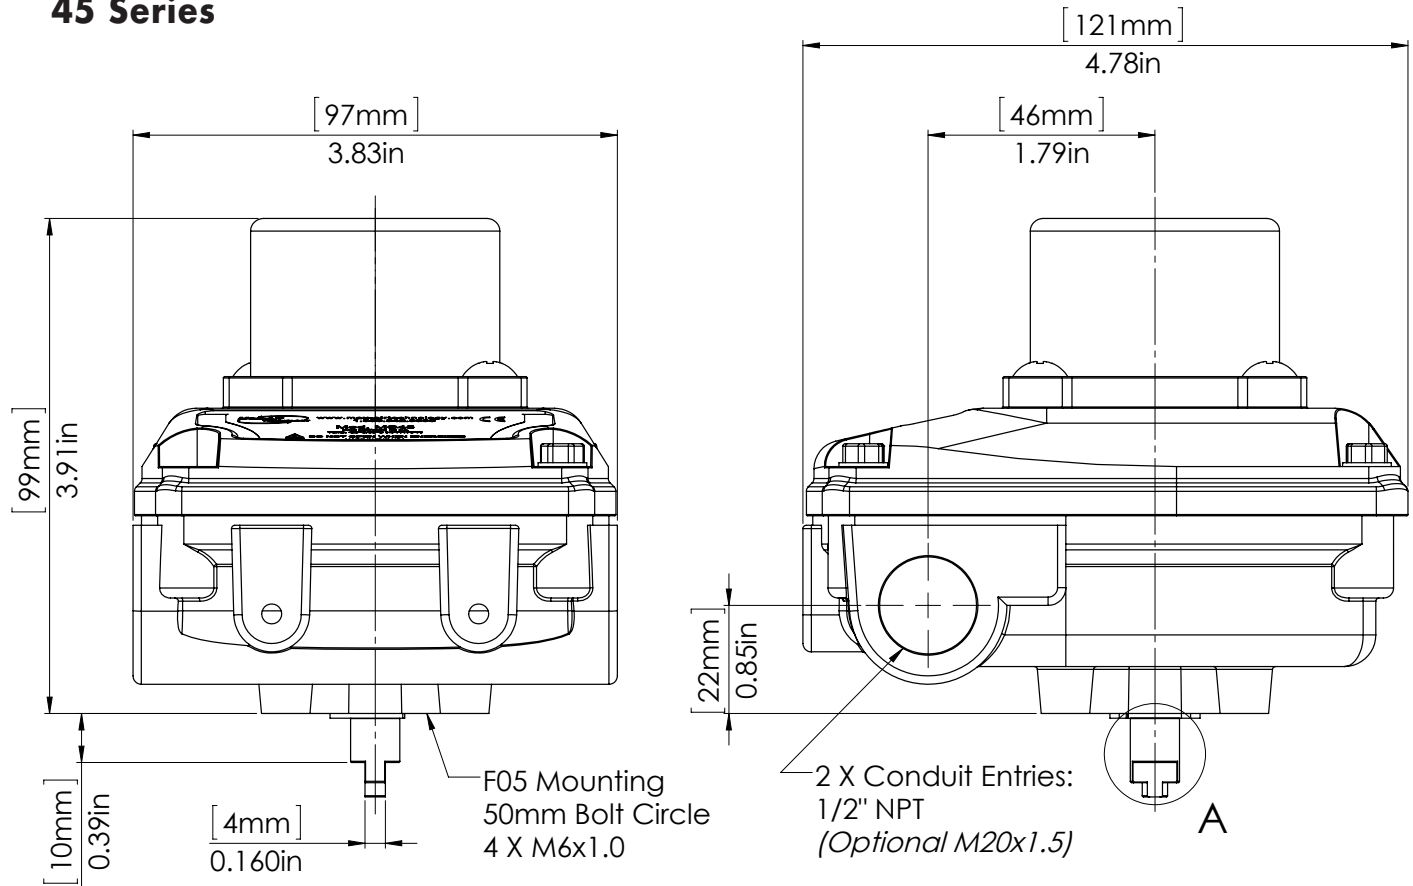


41 Series Technical Data

Exploded View, Materials of Construction, & Dimensional Data

41 Series

Exploded View & Bill of Materials

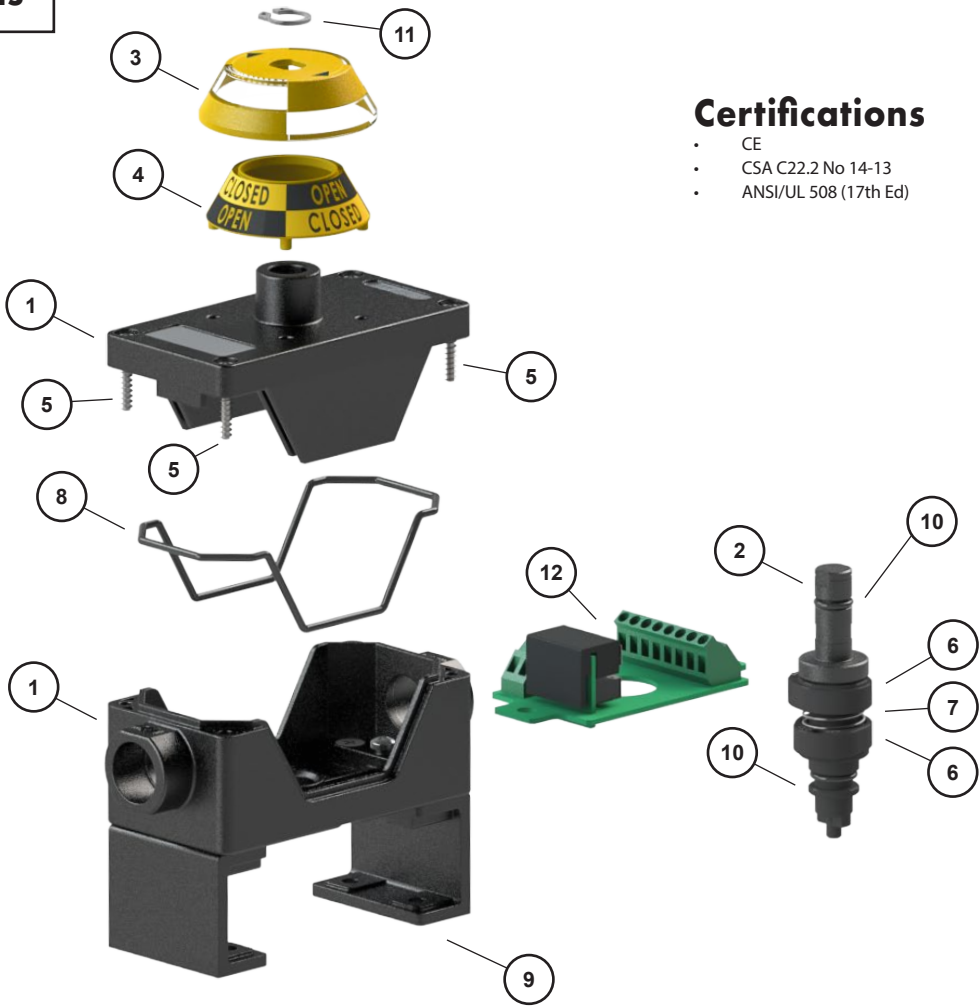

Certifications

- CE
- CSA C22.2 No 14-13
- ANSI/UL 508 (17th Ed)

#	DESCRIPTION	MATERIALS
1	Housing	Technopolymer
2	Shaft	Technopolymer
3	Beacon Cover	Polycarbonate
4	High Visibility Beacon	ABS
5	Cover Bolts	Stainless Steel
6	Cams	ABS

#	DESCRIPTION	MATERIALS
7	Spring	Stainless Steel
8	O-Ring	NBR
9	Bracket	Technopolymer
10	O-Ring	NBR
11	Indicator Snap Ring	Stainless Steel
12	PCB Board w/ Switches	Various


Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

41 Series

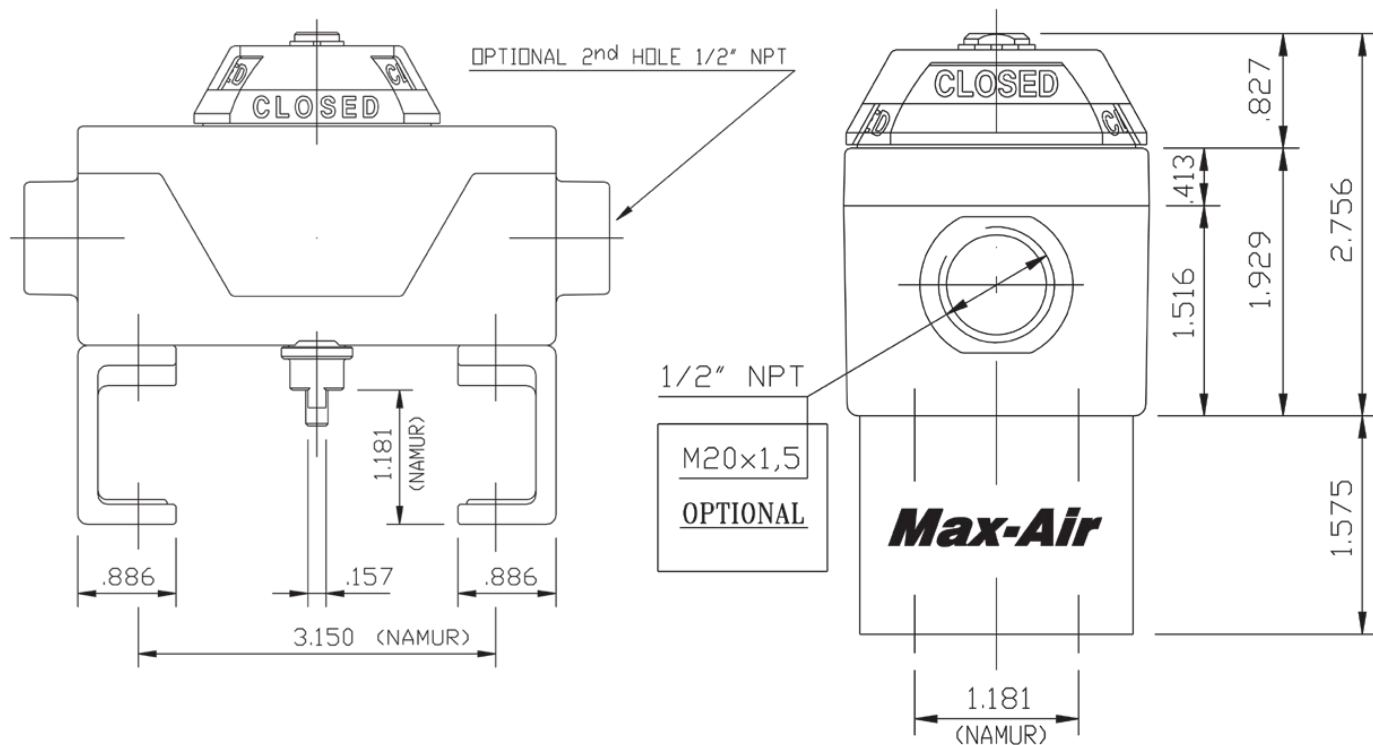

Wiring Diagrams


Diagrams for the 45 Series Limit Switch Boxes

45 Series - Mechanical/Proximity



WARNING: NEMA 4, 4x / IP67 protection depends on the wiring connection, so the use of inappropriate components and/or wrong installation will result in a decrease in the protection rating of the switch box.

45 Series MS, PS Type Switches 2x Mechanical/Proximity

TWO MICRO SWITCHES SPDT,
MECHANICAL OR MAGNETIC



(Dual Coil Board Option Shown)

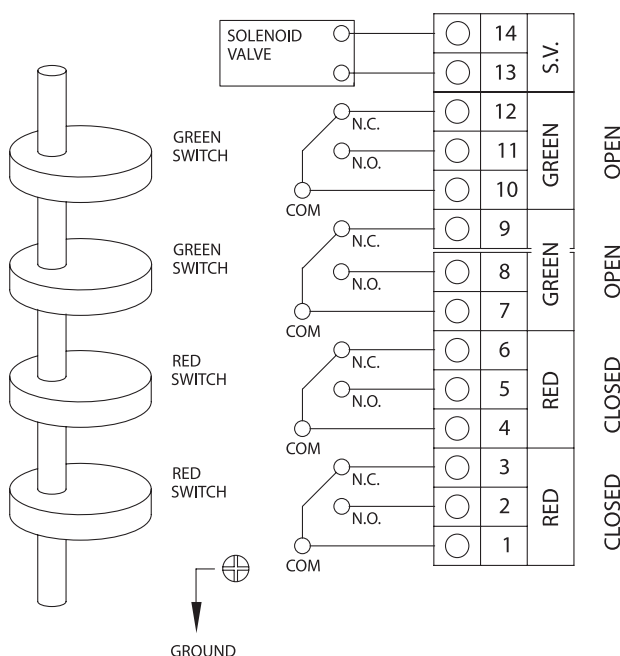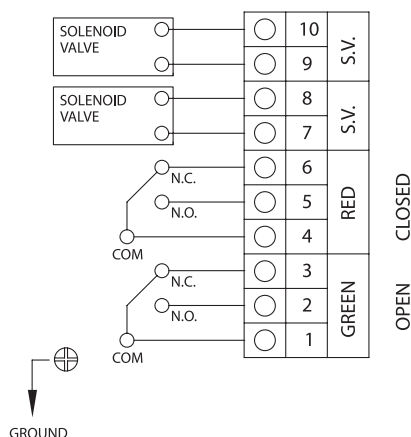


45 Series MS Type Switches Only 4x Mechanical

FOUR MICRO SWITCHES SPDT,
MECHANICAL

15

41 Series - Mechanical/Proximity

WARNING: NEMA 4, 4x / IP67 protection depends on the wiring connection, so the use of inappropriate components and/or wrong installation will result in a decrease in the protection rating of the switch box.

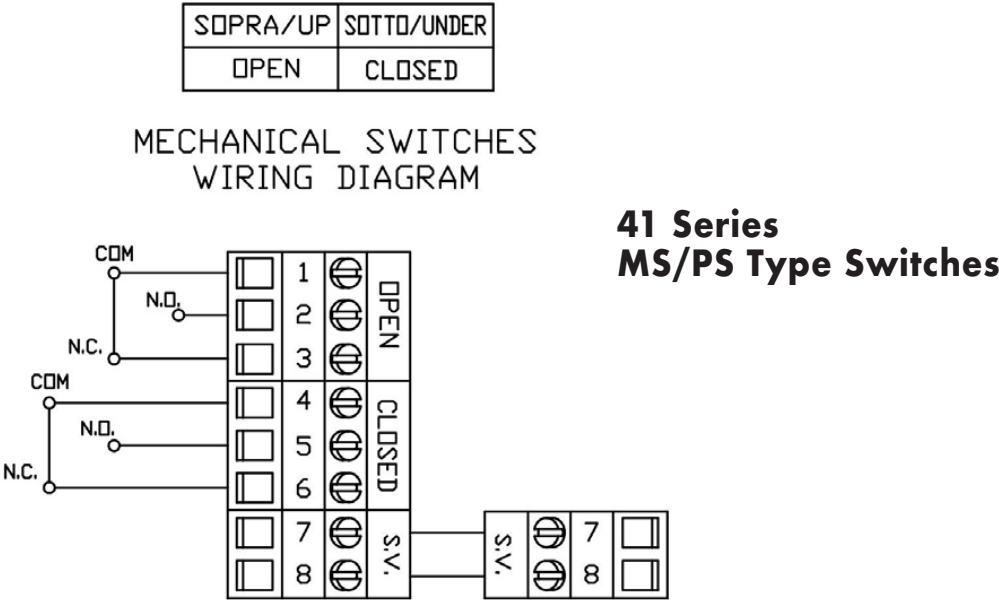




41 Series - Inductive Switches


WARNING: NEMA 4, 4x / IP67 protection depends on the wiring connection, so the use of inappropriate components and/or wrong installation will result in a decrease in the protection rating of the switch box.

41 Series IS Type Switches (2-Wire)

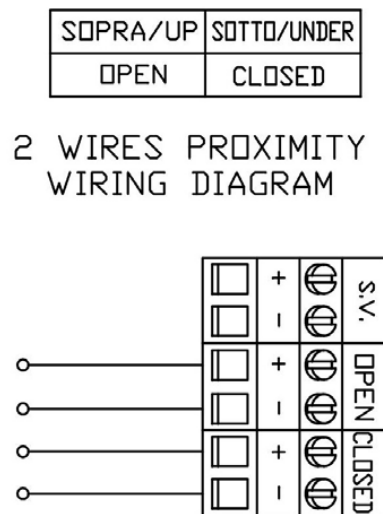

SOPRA/UP	SOTTO/UNDER
OPEN	CLOSED

3 WIRES PROXIMITY WIRING DIAGRAM

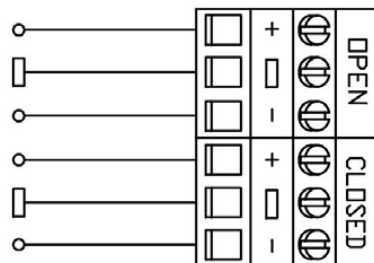

41 Series IS Type Switches (3-Wire)

Standards, Certifications & Approvals

CE, NSF/ANSI 372, ISO 5211, Atex, SIL2 NAMUR



CE Marking

is a mandatory conformity marking for certain products sold within the European Economic Area (EEA) since 1985. The CE marking is also found on products sold outside the EEA that are manufactured in, or designed to be sold in, the EEA. This makes the CE marking recognizable worldwide even to people who are not familiar with the European Economic Area. It is in that sense similar to the FCC Declaration of Conformity used on certain electronic devices sold in the United States.

The CE marking is the manufacturer's declaration that the product meets the requirements of the applicable EC directives.



Atex Global Approval:

In addition to being designed and produced according to sound engineering practice, the 45 & 41 Series have also been certified to the relevant Atex standards for safety (Machinery Directive, annex VIII B). Additionally it carries a CE mark and is in compliance with Annex VIII B of the Machinery Directive and regulation 80079-36.



NSF/ANSI 372

is essentially equivalent to Annex G of NSF/ANSI Standard 61 and assures that the materials used in the water contact components of a water system component do not exceed 0.25% lead content. Some trims excluded. See pg. 2-4



SIL2 Approval

The 45 & 41 Series have been independently evaluated by approval authorities which have confirmed that our actuators are SIL 2 capable in accordance with the requirements of IEC 61508 provided that they are installed in accordance with the relevant Safety Manual.



ISO 5211:

This standard defines a standardized interface system between industrial valves and the part turn actuators used operate them. It details the dimensional requirements for both the mounting flanges on both devices as well as the driving and driven components. This standardization simplifies the design of or eliminates the need for interface components between part turn valves and actuators.



NAMUR

The 45 & 41 Series come with NAMUR accessory interfaces according to VDI/VDE 3845. The air interface is in the 1/4" size.

Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com


This section left intentionally blank.

MAX-AIR TECHNOLOGY

The Best Way To Automate Your Process



Your nearest Max-Air dealer can be found at:



Max-Air Technology, Inc. • 114 Resource Drive • Wentzville, MO 63385 • United States of America
Tel +1.636.272.4934 • Toll Free 888.842.9998 • Fax 636.272.4937 • www.maxairtech.com • info@maxairtech.com

© Max-Air Technology, Inc. 2020



R: 04/20/20