

TECHNICAL DATASHEET

Asynchronous Motor 4A3 802-4

Customer:	
Ref:	
Order:	
Motor:	
Serial nr:	
Date:	2026-08-14

Nameplate Data:

Code: 121136

Type: 4A3 802-4					
kW	Hz	V	A	Rpm	Cos
0,75	50	230D	3,0	1430	0,75
0,75	50	400Y	1,7	1430	0,75
0,86	60	460Y	1,7	1716	0,75
Eff.(100%) 50Hz	Duty	IE-class S1	Amb.temp °C.	IP rating	Iso.class
82,7	S1	IE3	-20° - +40°C	IP55	F
Data duty S1, Amb.temp 40°C:					
Voltage - V:		400	Mounting form:		B3/B5
Frequency - Hz:		50	Bearing DE:		6204 2Z C3
Power - kW:		0,75	Bearing NDE:		6204 2Z C3
Full load speed - rpm:		1430	Weight - kg:		12,5
Full load current - A:		1,7	Heater:		No
Full load power factor - Cos:		0,75	Th.Protection:		PTC mounted
Locked rotor current - A:		11,5	Kgm²:		0,0027
Locked rotor factor - Ast/An:		6,6	Sound press.-db(A):		48
Efficiency 100% load - %:		82,7	Cooling:		IC411
Efficiency 75% load - %:		82,9	Braking Torque:		-
Efficiency 50% load - %:		81,5	Over load/speed test:		2000
Full load torque - Nm:		5,0	H-pot test voltage:		2000
Locked rotor torque - Nm:		11,5	Temp rise in stator:		F
Locked rotor torque - Nmst/Nmn:		2,3	Over load 160% - 15 sec		
Max. Pull out torque - Nm:		11,5	kW:		1,2
Max. Pull out torque. - Nmst/Nmn:		2,3	Hz:		50
Other:			V:		400
			A:		2,7
			Rpm:		1368
			Over speed 125% - 2 min		
			kW:		0,75
			Hz:		63
			V:		400
			A:		1,6
			Rpm:		1788

The motor is produced in accordance with following harmonized standards:

IEC60034-1, IEC60034-2, IEC60034-5, IEC60034-6, IEC60034-7, IEC60034-8, IEC60034-9

IEC60034-12, IEC60034-14, IEC60034-30-2, IEC60072.

Additional specifications in accordance with:

RINA - GL - LRS - BV - DNV - ABS - KR - RR - CCS - CCC - RMRS.

TECHNICAL DATASHEET

Asynchronous Motor 4A3 802-4

Customer:	
Ref:	
Order:	
Motor:	
Serial nr:	
Date:	2026-08-14


Motor data

Rated output [kW]	0,75	Full load torque [Nm]	5,0
Rated speed [r/min]	1430	Tstart / Tn	2,3
Rated current [A]	1,7	Tmax / Tn	2,3
Istart / In	6,6	Moment of inertia [kgm ²]	0,0027

Performance conditions

Voltage [V] at 100%	400	Frequenzy [Hz] at 100%	50
---------------------	-----	------------------------	----

Starting curves

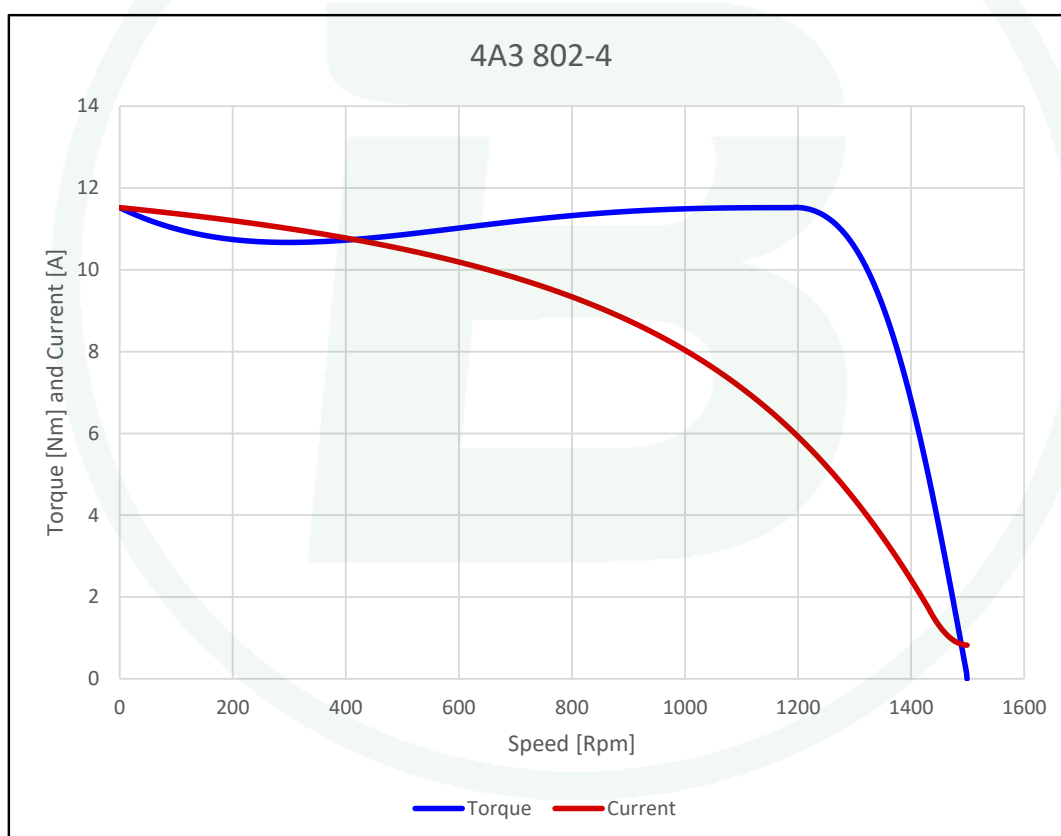

Please note that the graphs shown above are the result of a computer simlaton.

They are not and do not provide any sort of guarantee or certainty regarding the performance of any individual motor in a real life scenario.

TECHNICAL DATASHEET

Asynchronous Motor 4A3 802-4

Customer:	
Ref:	
Order:	
Motor:	
Serial nr:	
Date:	2026-08-14


Motor data

Rated output [kW]	0,75	Power factor at P_n [Cos ϕ]	0,75
Rated speed [r/min]	1430	Efficiency at P_n	82,7
Rated current [A]	1,7		
I _{start} / I _n	6,6		

Performance conditions

Voltage [V] at 100%	400	Frequency [Hz] at 100%	50
---------------------	-----	------------------------	----

Load curves

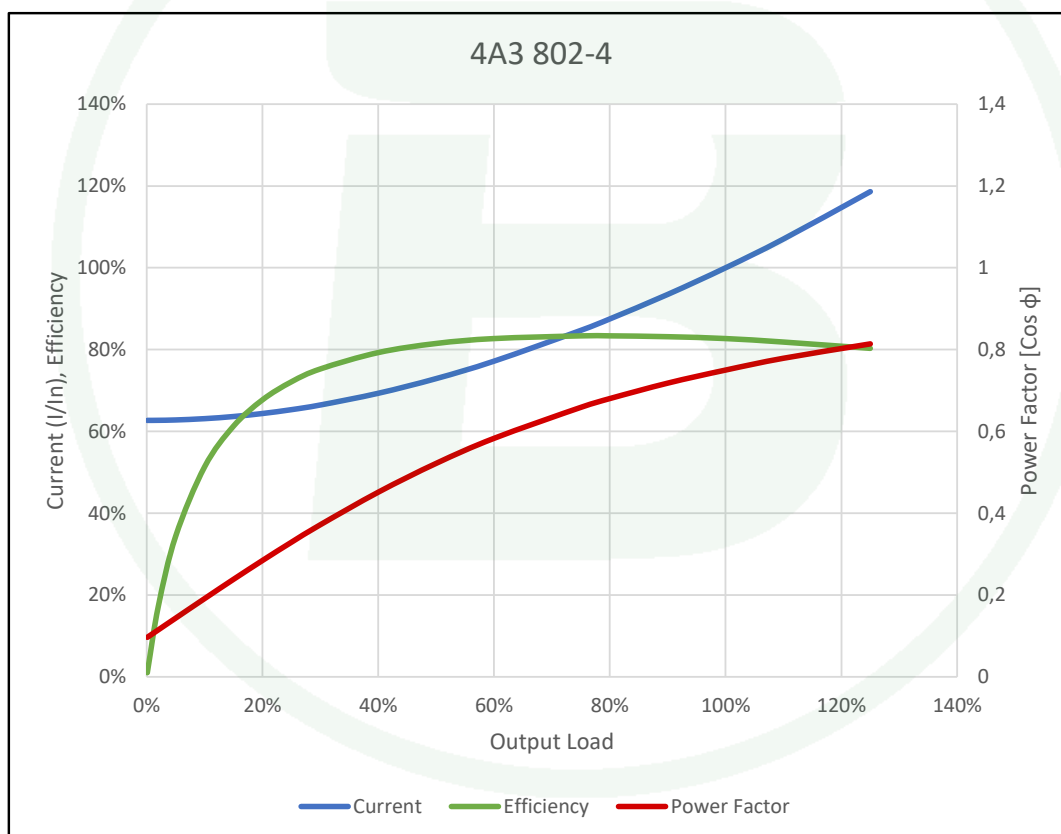

Please note that the graphs shown above are the result of a computer simulation.


They are not and do not provide any sort of guarantee or certainty regarding the performance of any individual motor in a real life scenario.

TECHNICAL DATASHEET

Asynchronous Motor 4A3 802-4

Customer:	
Ref:	
Order:	
Motor:	
Serial nr:	
Date:	2026-08-14

Foot & flange mounted motor 4A3 802-4 B3/B5

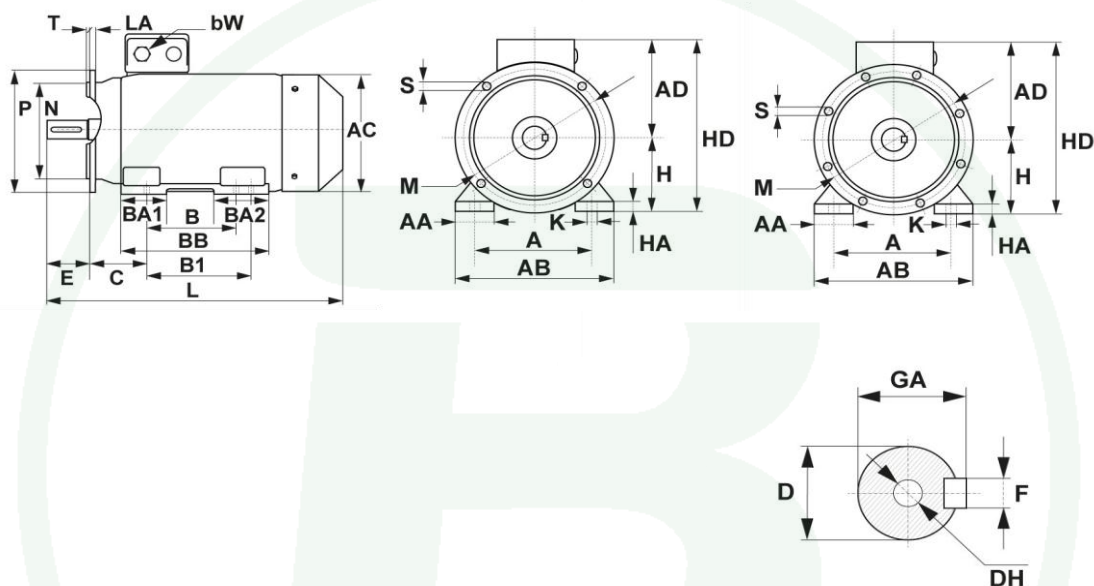

Unit: mm

M:	165	HD:	220	E:	40
N:	130	C:	50	D:	19
P:	200	H:	80	GA:	21,5
S:	12	K:	10	DB:	M6x16
Sp:	4	L:	300	F:	6
A:	125	LD:			
B:	100				
B1:					
AB:	165				
	155				
AD:	140				