

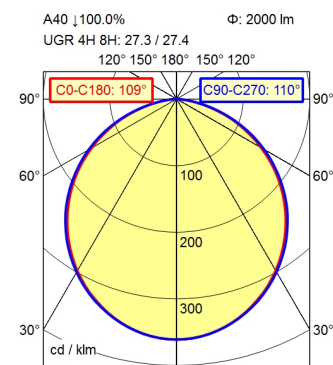


CEE 7/VII

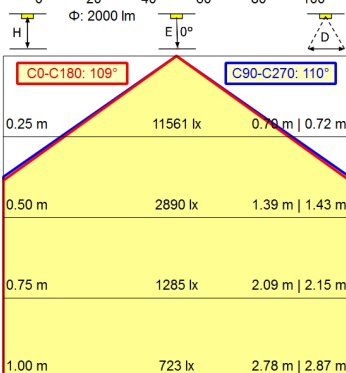

100 x 100 cm Φ : 2000 lm
Em: 1127 lx
Emax: 2224 lx
Emin: 403 lx
= 50 cm



Light source

Work equipment

Connected load

Secondary tension

Power consumption

Sec. power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Electronic transformer

100 - 240 V; AC; 50 Hz; 60 Hz

24 V

approx. 30 W

approx. 26 W

approx. 2.000 lm

approx. 76 lm/W

Cold white

approx. 5.000 K

CRI $\geq$ 90; R9 $\geq$ 50

Direct; approx. 100 %

110 °

< 3 SDCM

without

$\leq$ 23.000 cd/m²

$\leq$ 28

IP 20; I with plug-in power supply; III without plug-in power supply
Continuously dimmable; Touch DIM

Multi-function switch

Sectional aluminium; Anodised; Aluminium coloured anodised
Polycarbonate (PC); White opal

approx. 4.5 m; Mains plug; CEE 7/VII

Mounted version

Screw-down bracket, horizontal

4013330133887

1,8; approx. 3,2 kg

approx. 880 mm; 320 mm; 180 mm

Fixed connection

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

