Biduk® sensor


I1CF-M1208P-OEU4

Inductive Proximity Switch
3-Wire DC
Sensing range: *Advanced*

Mind O≠0, I≠l≠1, S≠5, B≠8.

Housing size	M12×1
Mounting	semi-flush
Sensing distance S_n	8 mm
Operating voltage	10...30 V_{DC}
Reverse polarity protection	built-in
Current consumption	<8 mA
Current load capability	200 mA
Output function	⎍ normally open
Output polarity	PNP
Short circuit protection	built-in, self-resetting
Voltage drop	<1.5 V @ 200 mA
Switching frequency	800 Hz
Reduction factors	Alu 0.45 · Brs 0.50 · SS 0.85
Operating temperature	−20...+70 °C · −3...+159 °F
Protection class	IP67
Sensing face material	PBT
Housing material	brass
Switching indicator	built-in
Connection	male connector M12
Clearance *z*	2 mm
Complies with	CE, RoHS




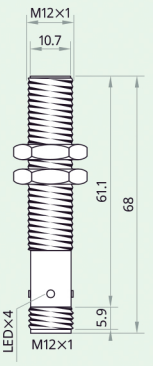


RoHS compliant

25 months **Warranty** Our products are manufactured to stringent ISO 9001 European standards to ensure that our customers only receive the best quality.


Wiring diagram




Clearance for parallel mounting

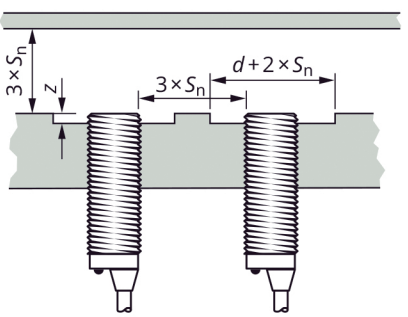

Pinout



Clearance for opposing mounting

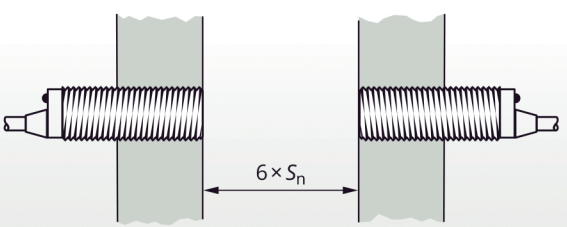

Caution! This device shall not be used if the safety of persons rely on its faultless function.