




Typ: **GKHR 250-CIW.078.4EA**

Motorlaufrad

Art.-Nr.: N86-25026



Kennlinie:

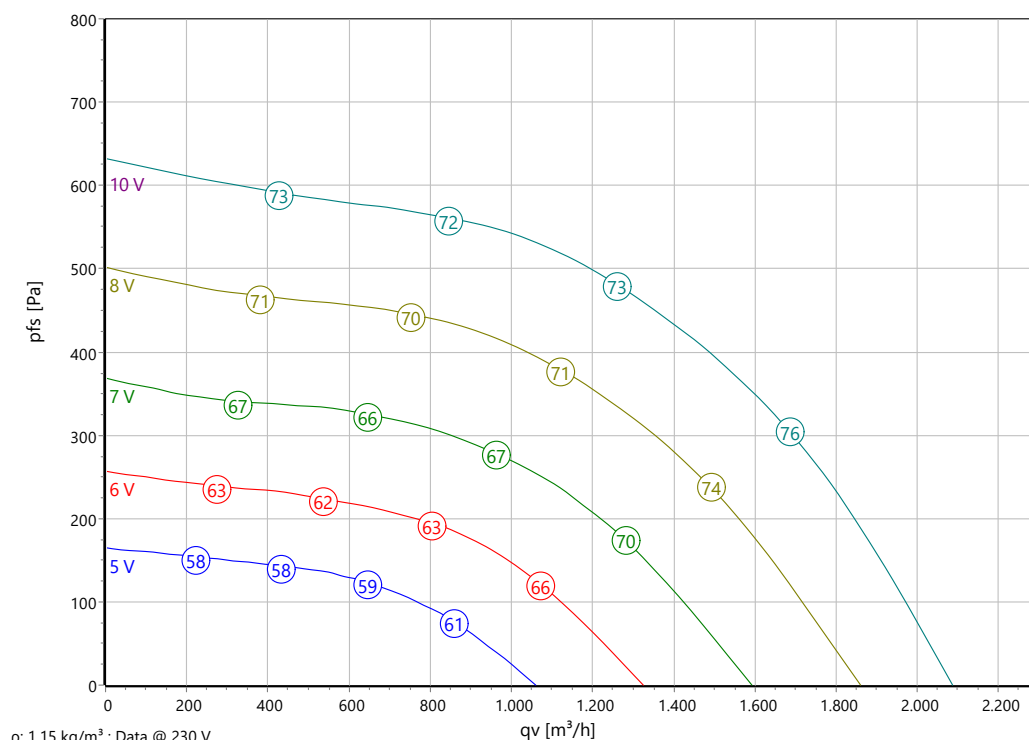

ErP - Daten:

ErP 2026 (EU) 2024/1834 (Lot11, BC)		
q_v	1138	m³/h
p_{fs}	630	Pa
η_{fs}	53,1	%
P_{ed}	0,422	kW
n	2983	U/min
N	68	N
v	5,1	m/s

Nennndaten:

U [V]	f [Hz]	Data @ [V]	P_{ed} [kW]	I_N [A]	n_N [U/min]	t_R [°C]	k_{10} [m²/s/h]	Eff.-Klasse	IP	m [kg]
1~200-277	50/60	230	0,4	1,77	275	-25 .. +50	48	IE4	IP 54	5

Schalldaten:

Frequenz	Σ		125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Entfernung	1 m	4 m
LwA(A,in) [dB(A)]		-	-20	-10	-5	-5	-9	-10	-15	LpA(A,in) [dB(A)]	-7	-17
LwA(A,out) [dB(A)]	6	-	-16	-5	0	1	0	-6	-9	LpA(A,out) [dB(A)]	-1	-11

ErP-Daten @ Modul Classic

Achtung: Hochlaufzeiten je nach Motor-Laufrad – Kombination, Motorauslastung und Betriebszahl bis zu ~ 20 – 60 sec.



Bitte bei der Projektierung beachten (bspw. bei Verflüssigereinheiten in Kältekreisläufen)!



Typ: **GKHR 250-CIW.078.4EA**

Motorlaufrad

Art.-Nr.: N86-25026

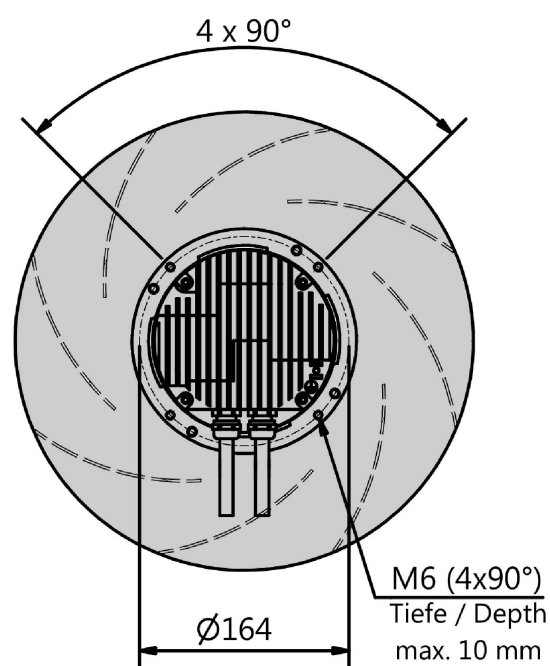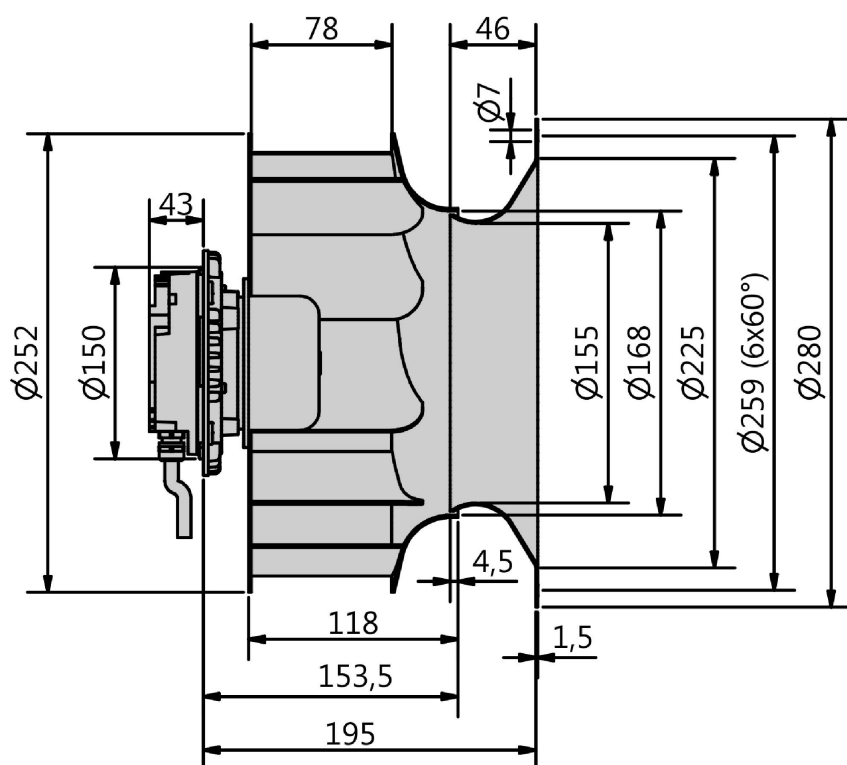



Typ: **GKHR 250-CIW.078.4EA**

Motorlaufrad

Art.-Nr.: N86-25026

