


| ITEM | DESCRIPTION               | QTY |
|------|---------------------------|-----|
| 1    | SCH SOLI-CON              | 1   |
| 2    | BRACKET ASMB              | 1   |
| 3    | LEVER                     | 1   |
| 4    | LINKAGE COVER             | 1   |
| 5    | BODY BONNET ASMB          | 1   |
| 6    | SOLI-CON LABLE ACT        | 1   |
| 7    | SOLI-CON LABLE VALVE      | 1   |
| 8    | GE LABLE                  | 1   |
| 9    | HEX HEAD 5/16-18 X 1-1/2  | 4   |
| 10   | FLEX NUT 5/16-18 21FA-518 | 4   |
| 11   | SCREW 8-32 X 3/8          | 8   |
| 12   | BONN/BRKT GASKET          | 1   |
| 13   | SCREW 1/4-20 X 1-1/4      | 1   |
| 14   | FLEX NUT 1/4              | 1   |



CURRENT: (APPROX) SOLI-CON SCH SOLENOID  
 6 AMPS INRUSH  
 0.3 AMPS HOLDING  
 @ 125 VOLTS D.C.  
 NET WIEIGHT 18 LBS.  
 G.E. PART No.381A7011P002

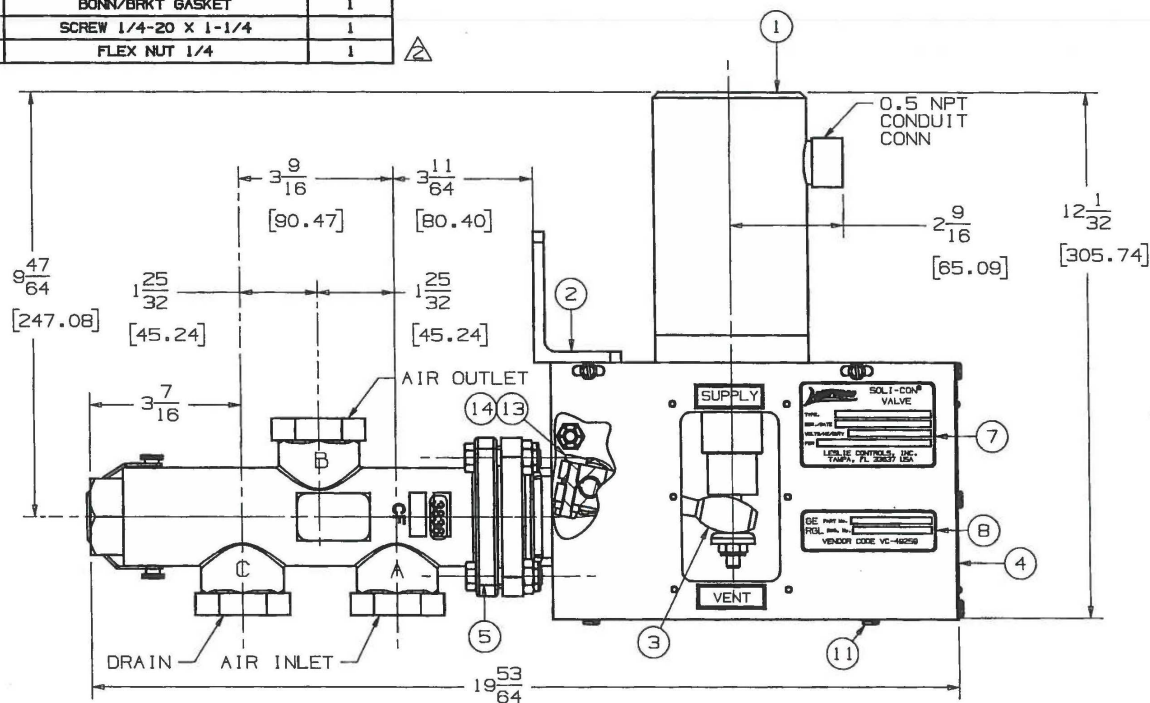

LAURENCE CAT No.3319VSC1208SDC  
 1" PIPE SIZE; Cv = 5  
 3-WAY ROTARY SHAFT TYPE "SOLI-CON" VALVE WITH  
 SOLID-STATE-CONTROLLED ELECTRIC ACTUATOR.  
 DIRECT OPERATED - POPPET TYPE STAINLESS STEEL 304 BODY  
 ATEX APPROVED GROUP II, CAT 3, GAS ZONE (G), IIA,  
 T4 TEMPERATURE CLASS & NEMA 4, WATERTIGHT  
 ACTUATOR ENCLOSURE, CONTINUOUS DUTY, CLASS H MOLDED COIL  
 FOR 183 PSI AIR, FORM "M"NAMEPLATE INFORMATION: #4,6,&1

THIS DRAWING IS THE PROPERTY OF LESLIE CO. IT CONTAINS INFORMATION PROPRIETARY TO LESLIE CO. AND IS ISSUED FOR A PARTICULAR LIMITED PURPOSE ONLY. WHEN THE PURPOSE FOR WHICH IT HAS BEEN ISSUED HAS BEEN FULFILLED OR UPON DEMAND, THIS DRAWING MUST BE RETURNED TO LESLIE CO. DRAWINGS MAY BE RETAINED ONLY WITH EXPRESS WRITTEN CONSENT. REPRODUCTION OF THIS DRAWING UNDER ANY CONDITIONS IS EXPRESSLY FORBIDDEN.

