

baelz 373-E07

DESCRIPTION

Motorized linear actuator for control operation For control valves up to DN125.

TECHNICAL SPECIFICATIONS

Ambient conditions:
Temperature: 0 ... +50°C
Relative humidity: 0 ... 75%

Stroke:
12, 16, 22 mm

Cover: plastic
1 cable inlet M16x1.5 (plastic)
2 locking screws for cable inlet M16x1.5 (plastic)
Manual operation

Yoke options:
Aluminum yoke for valves DN15 ... DN125
S21 - for fittings with Ø 10 mm spindle
S21-L - for fittings with Ø 16 mm spindle

Type baelz 373	Weight, approx. (kg)	Power (N)	Speed (mm/min)		Power (VA)	Supply voltage	IP rating
			50 Hz	60 Hz			
E07-20-06-S21/L	2.2	2000	6	7.2	11.7	230 V, 115 V, 24 V 50/60 Hz	IP 42*
E07-20-18-S21/L	2.2	2000	18	21.7			
E07-70-130-S21/L	2.2	700	130	156			

* - IP 65 can be ordered if manual operation is not required

Option / Extra	Description	Remarks
2EZ-V2	2 limit switches with position indicator	
Mf-FgA	Multiturn potentiometer	A = 200 Ω / 1 kΩ / 5 kΩ Please specify resistance when ordering
2EZ-V2-FgA	2 limit switches with position indicator and feed-back potentiometer	A = 1 kΩ / 5 kΩ Please specify resistance when ordering
ZB373-E07-7164-230	Built-in microprocessor controller (as an accessory for E07)	including potentiometer 1-5 kΩ Supply: 24 V / 115 V / 230 V 50/60 Hz order to match actuator!
ZB373-E07-7164-115		
ZB373-E07-7164-24		
7020-230	Built-in digital positioner (as an option for E07)	Input / output signal: 0(2)...10 V / 0(4)...20mA factory setting 0...10 V Includes 5 kΩ feedback potentiometer Supply : 24 V / 115 V / 230 V 50/60 Hz
7020-115		
7020-24		
MP373-E07-S21-L	Yoke assembly for valves with spindle Ø 16 mm	Surcharge on top of basic price of 373-E07...S21
MP373-E07-Silf	Silicone-free version	
MP373-E07-KT9992	Mechanical travel limits	
MP373-E07-RH	Locking manual override	
MP373-E07-IP65	Ingress protection rating IP65	
MP373-E07-2RC	2 additional RC snubbers	Fitted in actuator E07..., 230 V

W. Baelz & Sohn GmbH & Co. • Koepffstrasse 5 • 74076 Heilbronn • Germany • mail@baelz.de • **www.baelz.de**



baelz 7164

Integrated positioners for baelz 373-E07:


baelz 7164 - microprocessor-based controller
baelz 7020 - digital positioner

See section: 3.6 Built-in controllers for electric actuators




baelz 7020


Dimensions
baelz 373-E07 (mm)

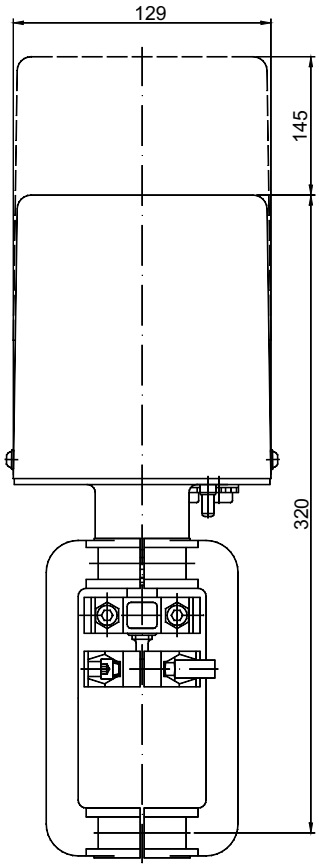


Wiring diagram, basic version

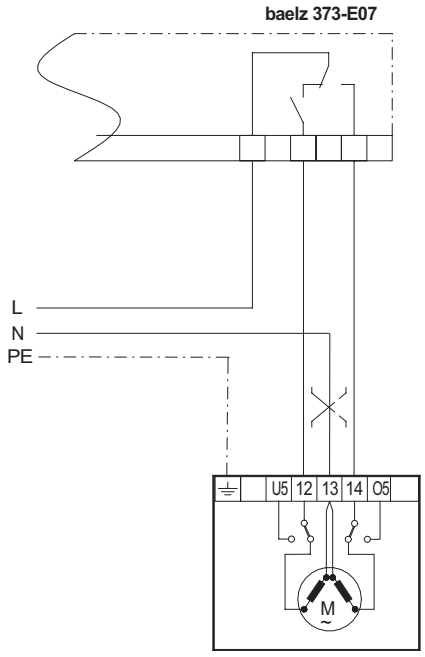

With additional limit switches

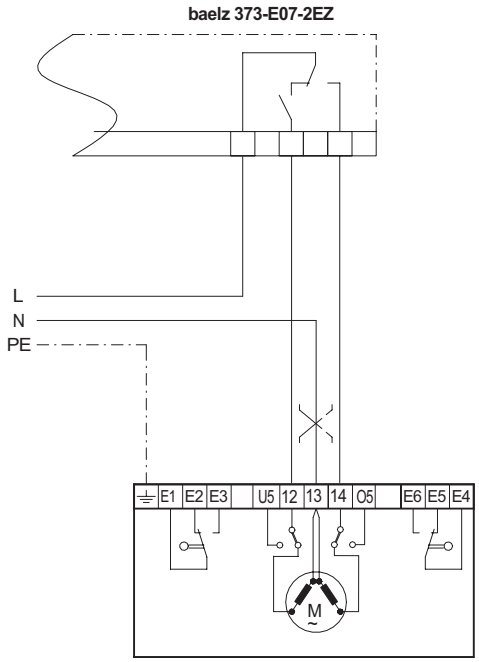

With additional limit switches and feedback potentiometer

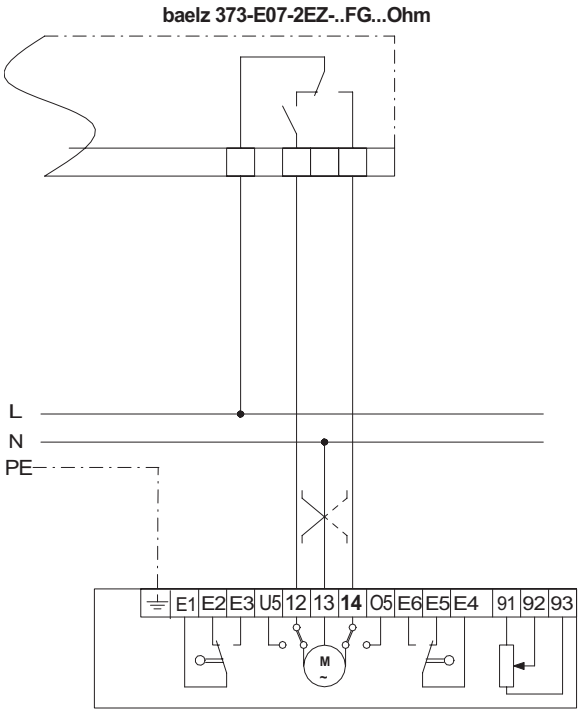

373-E07-20-18-S21-2EZ-V2-Fg

W. Baelz & Sohn GmbH & Co. • Koepffstrasse 5 • 74076 Heilbronn • Germany • mail@baelz.de • **www.baelz.de**

Wiring diagram, baelz 7020 digital positioner

