
PTT16066-16072
Standard Series 7 to 9 Pneumatic Torque Tools Single Speed with Handle and Adjustable Reaction

PRODUCT DETAILS

- Quiet operating level of 81dB(A) when free running (uncertainty of K=3dB)
- Non impacting - low vibration levels make these tools comfortable and safe to use
- Electronic torque transducers can be fitted for precise torque monitoring
- Accuracy ±5%
- Forward and reverse operation
- Other reaction styles can be designed to suit specific applications
- Supplied as standard with a traceable calibration certificate in a clockwise direction only
- With handle and adjustable foot reaction
- Made in the UK



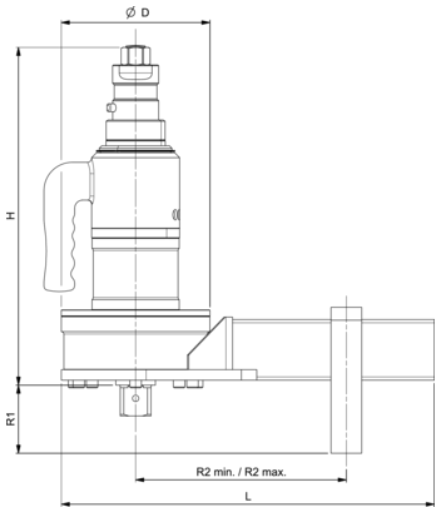

PRODUCT ATTRIBUTES

Product	N·m	lbf·ft		D	R1 mm	R2 min mm	L	H1 mm	kg	kg
16066	1762-6000 N·m	1300-4500 lbf·ft	1-1/2 in	144 mm	84 mm	150 mm	423 mm	423 mm	6.3 kg	19.7 kg
16072	2710-9500 N·m	2000-7000 lbf·ft	1-1/2 in	184 mm	84 mm	175 mm	448 mm	418 mm	8.3 kg	24.40 kg