

PRODUCT SPECIFICATIONS

MODEL NO.	MOTOR	RPM		AMPS		HP	kW	NET WT.		CAPACITOR	
		60HZ	50HZ.	60HZ	50HZ.			lbs.	kg	mfd.	VOLT
106R550-102-N600X	115-120/230-240 (60Hz) 220-230 (50Hz)	1725	1425	7.4/3.8	3.8	0.75	0,56	29.1	13.2	55	370

SOUND LEVEL 66 dB(A)

NORMAL AMBIENT +5 °C to +40 °C



RELATIVE HUMIDITY 20% - 80%

ENVIRONMENT CLEAN


NOTES:

1. TECHNICAL DATA SUBJECT TO CHANGE WITHOUT NOTICE.
2. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
3. STAGED HEAD. LOW PRESSURE AND HIGH PRESSURE HEADS CONNECTED THROUGH INTERNAL HEAD CROSSOVER CONNECTION.
4. MOTOR LEADS ARE 30 INCH LONG 18 AWG WIRES.

PRODUCT PERFORMANCE:

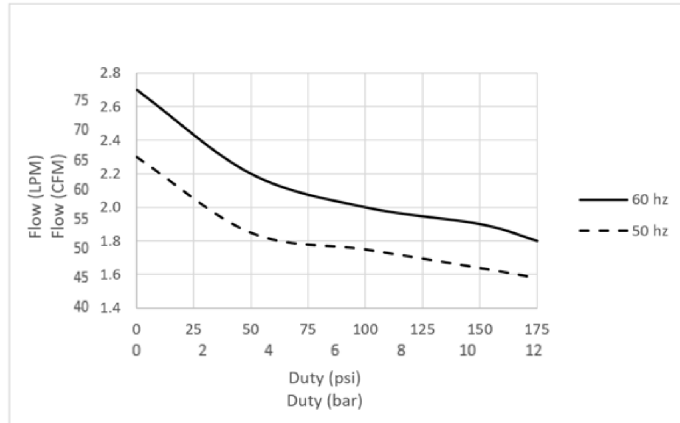


PRODUCT DIMENSIONS:

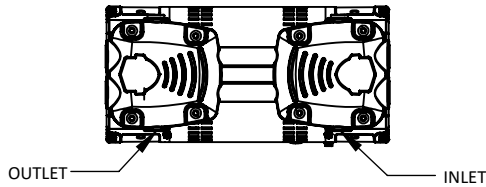


STAGED HEAD
SEE NOTE 3

HIGH PRESSURE

LOW PRESSURE

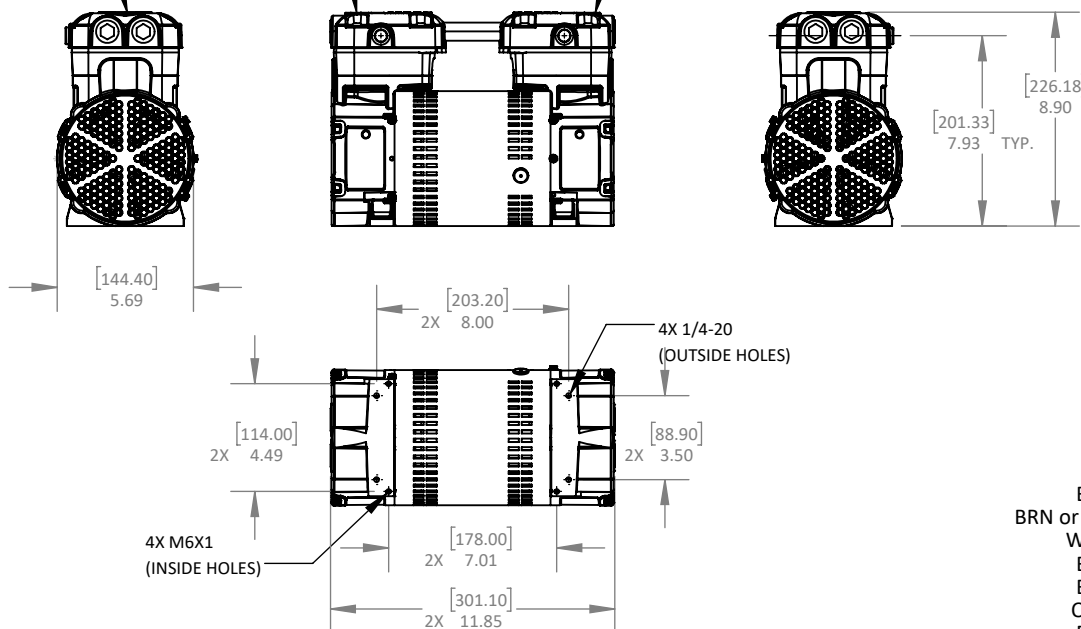

PARTS SHIPPED UNATTACHED

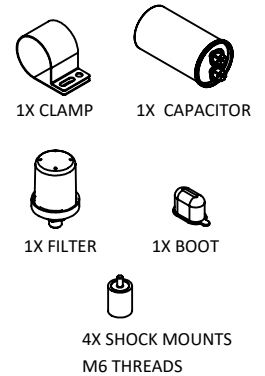

WIRING DIAGRAM

