


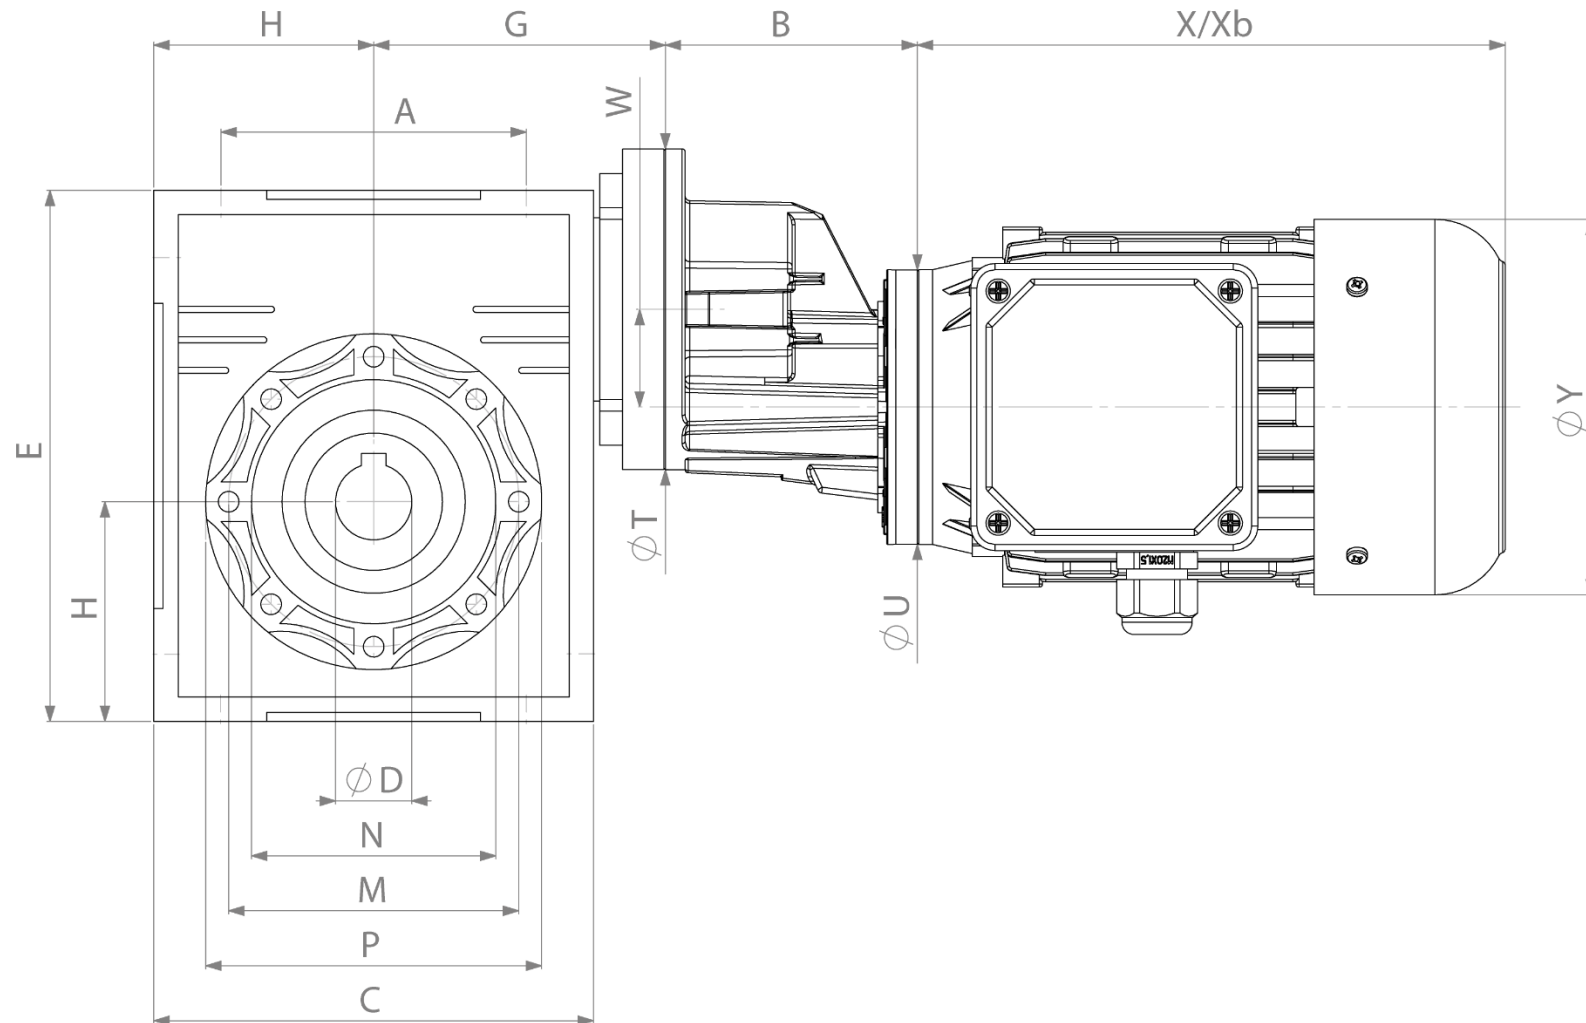

ABMESSUNGEN uniGEAR STIRNRAD-SCHNECKENGETRIEBEMOTOREN SERIE NMS/NFXA

Baugröße	A	B	C	D	E	G	H	M	N	P	W	T	Motor	U	X	X _b	Y	kg
NMS30 + NFXA 56	54	69	80	14 (H8)	97	55	40	65	55 (h8)	75	30,5	90	50	80	144	182	98	4,5
													56	80	167	193	110	5
NMS40 + NFXA 56	70	69	100	18 (H8)	121,5	70	50	75	60 (h8)	87	30,5	90	50	80	144	182	98	5,6
													56	80	167	193	110	6,1
NMS40 + NFXA63	70	83	100	18 (H8)	121,5	70	50	75	60 (h8)	87	32	105	56	80	167	193	110	6,2
													63	90	193	218	123	8
NMS50 + NFXA63	80	83	120	25 (H8)	144	80	60	85	70 (h8)	100	32	105	56	80	167	193	110	7,4
													63	90	193	218	123	9
NMS63 + NFXA63	100	83	144	25 (H8)	174	95	72	95	80 (h8)	110	32	105	56	80	167	193	110	10
													63	90	193	218	123	11,7
NMS50 + NFXA71	80	90	120	25 (H8)	144	80	60	85	70 (h8)	100	40	120	71	105	215	246	138	12
NMS63 + NFXA71	100	90	144	25 (H8)	174	95	72	95	80 (h8)	110	40	120	71	105	215	246	138	14,7
NMS75 + NFXA71	120	90	172	28 (H8)	205	112,5	86	115	95 (h8)	140	40	120	71	105	215	246	138	17,5
NMS90 + NFXA71	140	90	206	35 (H8)	238	129,5	103	130	110(h8)	160	40	120	71	105	215	246	138	21,5
NMS63 + NFXA80	100	114	144	25 (H8)	174	95	72	95	80 (h8)	110	50	140	80	120	235	277	156	18,5
													90S	140	250	292	176	22
													90L	140	275	316	176	23,3

Alle Maße in mm; Abmessungen freibleibend; technische Änderungen vorbehalten!

*) je nach Motorfabrikat