




ZONE	REV.	DESCRIPTION	DATE	SIGNATURE
------	------	-------------	------	-----------



Scale 1:1

PIEZO SWITCH

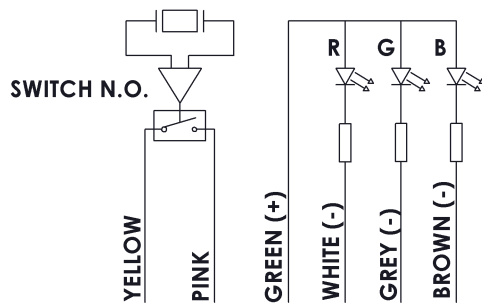


SPECIFICATIONS:

SWITCHING VOLTAGE: 1 - 24V AC/DC
SWITCHING CURRENT: 1A max
MAXIMUM POWER DISSIPATION: 10 Watt
SWITCH RESISTANCE "ON": <20 Ω
SWITCH RESISTANCE "OFF": >5 M Ω
ACTUATION FORCE: 3-5 N
MAKE IMPULSE TIME: 125-300 mSEC
OPERATING TEMP: -20 °C TO +70 °C
STORAGE TEMP: -40 °C TO +85 °C

Separated LEDs: RED, GREEN, BLUE
LED Operating Voltage : 24V DC max
Each LED current consumption : max 25 mA

CONNECTION: CABLE LIYY 6X0.14, LENGTH 300 $\pm$ 5mm

FINISH:
ANODIZE THICKNESS: 17-19 μ
PRINTING COLOR: NATURAL

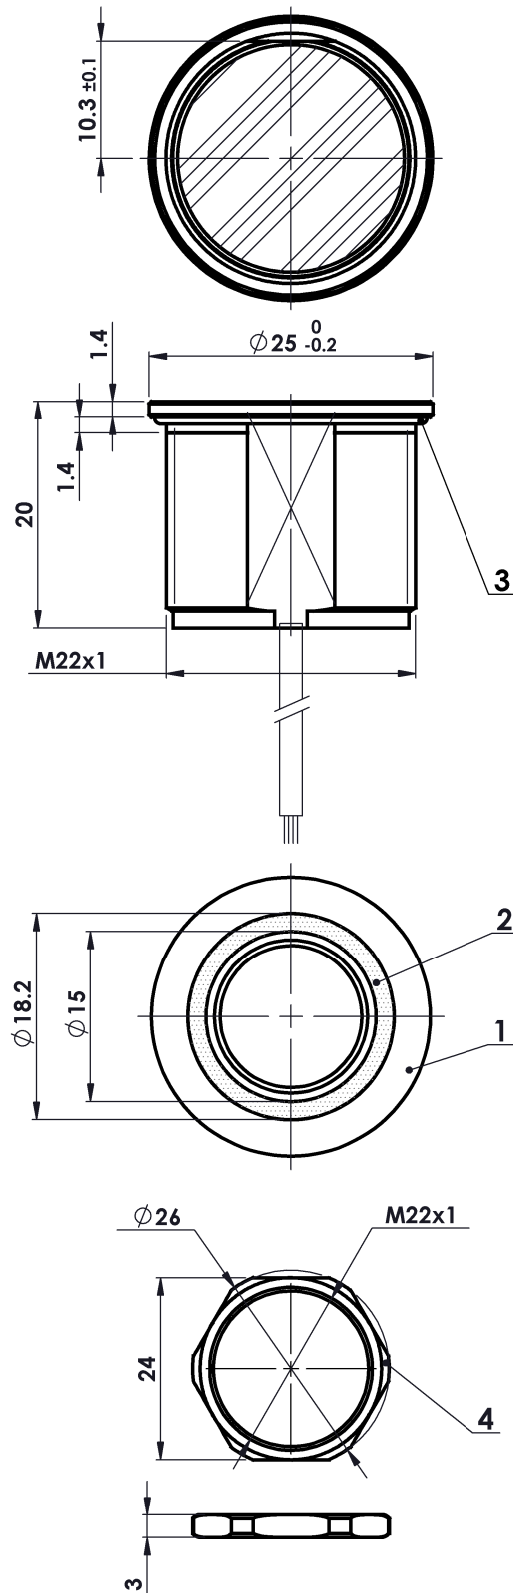

ITEM NO.	QTY.	DESCRIPTION	PART NUMBER
1	1	HOUSING, ALUMINIUM 6061 T651	81018725
2	1	NUT, BRASS (Ni COATED), M22x1	07099113
3	1	O-RING, NBR (Acrylonitrile-Butadiene Rubber), 22x1	81500015
4	1	ILLUMINATED RING, WHITE DELRIN	81080253
	A4	TOLERANCE $\pm$ 0.1	
Itemref	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference
Approved by: Roi Ben Shitrit		Designed by: Inna Hatkevich	Filename
			13700503_908-878
			908-878
			1.5:1
			22.01.2017
		Baran House 8 Omarim St. Omer Industrial area 84965 Israel Tel. 972 (0) 73 2511020 Fax. 972 (0) 73 2511021	SBR22ABC8241N,24V RGB(+)LED,0.3m
		Cat num:	13700503
		Edition	1
		Sheet	1/1