



LED integrated
monoblock pilot
lights steady light
LPML

Product designation

Product type designation

General characteristics

Colour	Transparent		
Type of positions	Monoblock pilot light		
Material	Polyamide		
IEC degree of protection	IP66, IP67 and IP69K on front; IP20 on rear		

Electrical characteristics

Rated frequency	Hz	50-60	
Supply voltage (AC)	V	110...120 (-15% ... +10% Ue)	
Maximum current consumption	mA	≤ 20	

Operations

Electrical life	hours	>30000	
-----------------	-------	--------	--

Mechanical features

Tightening torque for terminals max	Nm	0.8
Terminals screw		Screw termination

Conductor section

AWG/kcmil conductor section

min	18
max	16

IEC

max	mm ²	2.5
-----	-----------------	-----

Fixing	Ring fixing Ø22mm		
--------	-------------------	--	--

Weight	g	24	
--------	---	----	--

UL technical data

UL degree of protection	Type1, 2, 3R, 4, 4X, 12, 12K on front		
-------------------------	---------------------------------------	--	--


Ambient conditions

Temperature


Operating temperature

min	°C	-25
max	°C	+70

Dimensions

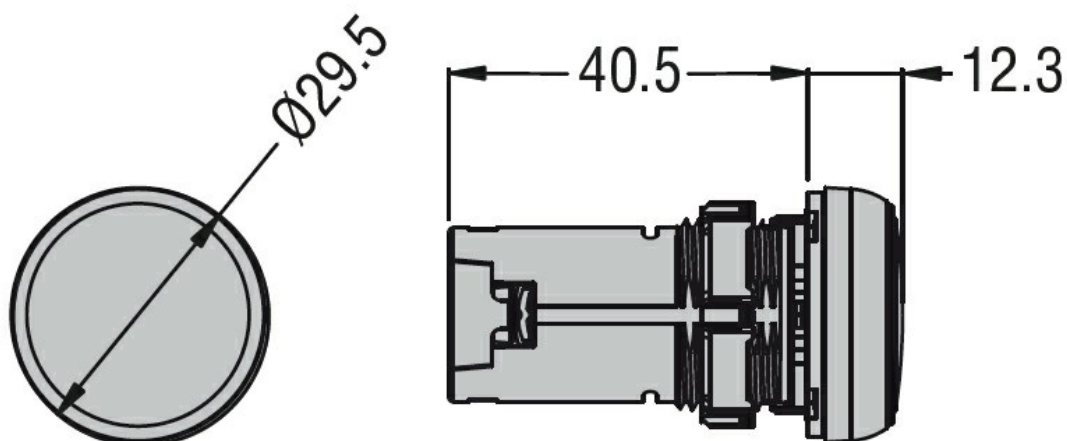

Wiring diagrams

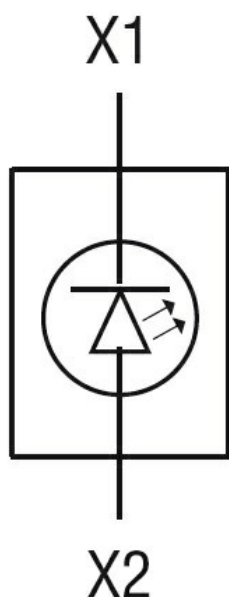

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC000272 -
Indicator light
complete