

Data sheet

Ref. no.	Datenblätter IE3 4pol
Item no. / Configuration	01 / 3104225-37.0-010201-M-074361
Description	HMC3 225S-4 400/690 V 50 Hz 37 kW

Sales order	SODK-253207
Line no.	49
Our reference	Timo Alexander Jansen
Date	06-07-2026

General data	
Standard series	IEC 60034
Type	HMC3 225S-4
Design	400 VD / 690 VY 50 Hz + 480 VD / 830 VY 60 Hz
Direction of rotation	CW
Installation max. altitude (m)	1.000
Poles	4

Motor protection	
Winding temp. detector	No
Temp. detector type	None
Bearing detector	No
Winding PTC main	PTC 3 x 155°C
Winding PTC secondary	None
Space heater	230 V 80 W
Terminal board thread	M8
Electrical insulation	Standard (1350 V @ 0.8 µs)
Tropical insulation	Yes
SPM	N/A
External grounding	Yes
Drain hole	Yes
Rain cap	No

Classification	
Class society	
Materials approval	None
Ex. code	No
Industrial certification	CE, UKCA


Mechanical data	
Frame / Shaft height	IEC 225
Type of construction	B3
Cooling method	IC411
Protection class	IP55
Temp. insulation class	F
Frame material	Cast iron
Keyway	Closed
Balancing	Half key
IEC vibration class	A
Weight (kg)	308
Bearing (DE)	6313 / C3 / DGBB
Bearing (NDE)	6312 / C3 / DGBB
Fixed bearing	DE
Moment of inertia (kg×m ²)	0.6
Painting (color)	RAL 9005
Corrosion protection	C3L
Main terminal box pos.	DE top
Main cable entries	Blind cap 2xM50x1.5
Main cable direction	Right from DE
Main cable material	Plastic
Aux. cable entries	Blind cap 2xM20x1.5
Aux. cable direction	NDE
Aux. cable material	Plastic

Winding operation variants						
Rated power (kW)	37	44.5	37			
Frequency (Hz)	50	60	60			
Connection	D/Y	D/Y	D/Y			
Voltage (V)	400 / 690	440 / 762	480 / 830			
Full load current (A)	66 / 38.1	68 / 39.3	55.2 / 31.9			
No load current (A)	22.5	29.21	22.5			
Speed (rpm)	1482	1779	1779			
Power factor 100/75/50 (%)	0.86 / 0.83 / 0.75	0.86 / 0.83 / 0.75	0.86 / 0.83 / 0.75			
Efficiency 100/75/50 (%)	93.9 / 94.3 / 93.8	94.5 / 94.3 / 93.8	94.5 / 94.1 / 93.6			
Efficiency class	IE3	IE2	IE3			
Full load torque (Nm)	238	238	199			
Tst/Tn	3.07	2.98	3.68			
Tmax/Tn	3.32	3.22	3.98			
Ist/In	7.9	7.9	9.44			
Temp. rise class	B	B	B			
Duty	S1	S1	S1			
Sound pressure level (dBA)	65.6	70.6	71			
Min. ambient temp. (°C)	-20°C	-20°C	-20°C			
Max. ambient temp. (°C)	40°C	45°C	40°C			

Data are not binding. Hoyer reserves the right to implement changes without notice. The extent of data are not equivalent to nameplate on the motors.

Data sheet

Ref. no.	Datenblätter IE3 4pol	Sales order	SODK-253207
Item no. / Configuration	01 / 3104225-37.0-010201-M-074361	Line no.	49
Description	HMC3 225S-4 400/690 V 50 Hz 37 kW	Our reference	Timo Alexander Jansen
		Date	06-07-2026

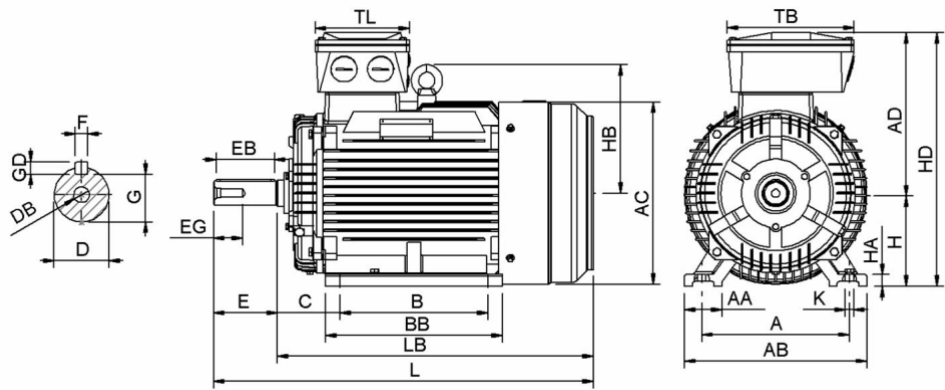

A 356.00	AA 75.00	AB 431.00	AC 444.40	AD 336.00	B 286.00	BB 368.00	C 149.00	D 60.00	DB 20.00	E 140.00	EB 130.00	EG 56.00	F 18.00	G 53.00	GD 11.00
H 225.00	HA 28.00	HB 285.00	HD 561.00	K 18.50	L 822.50	LB 682.50	TB 260.00	TL 192.00							