


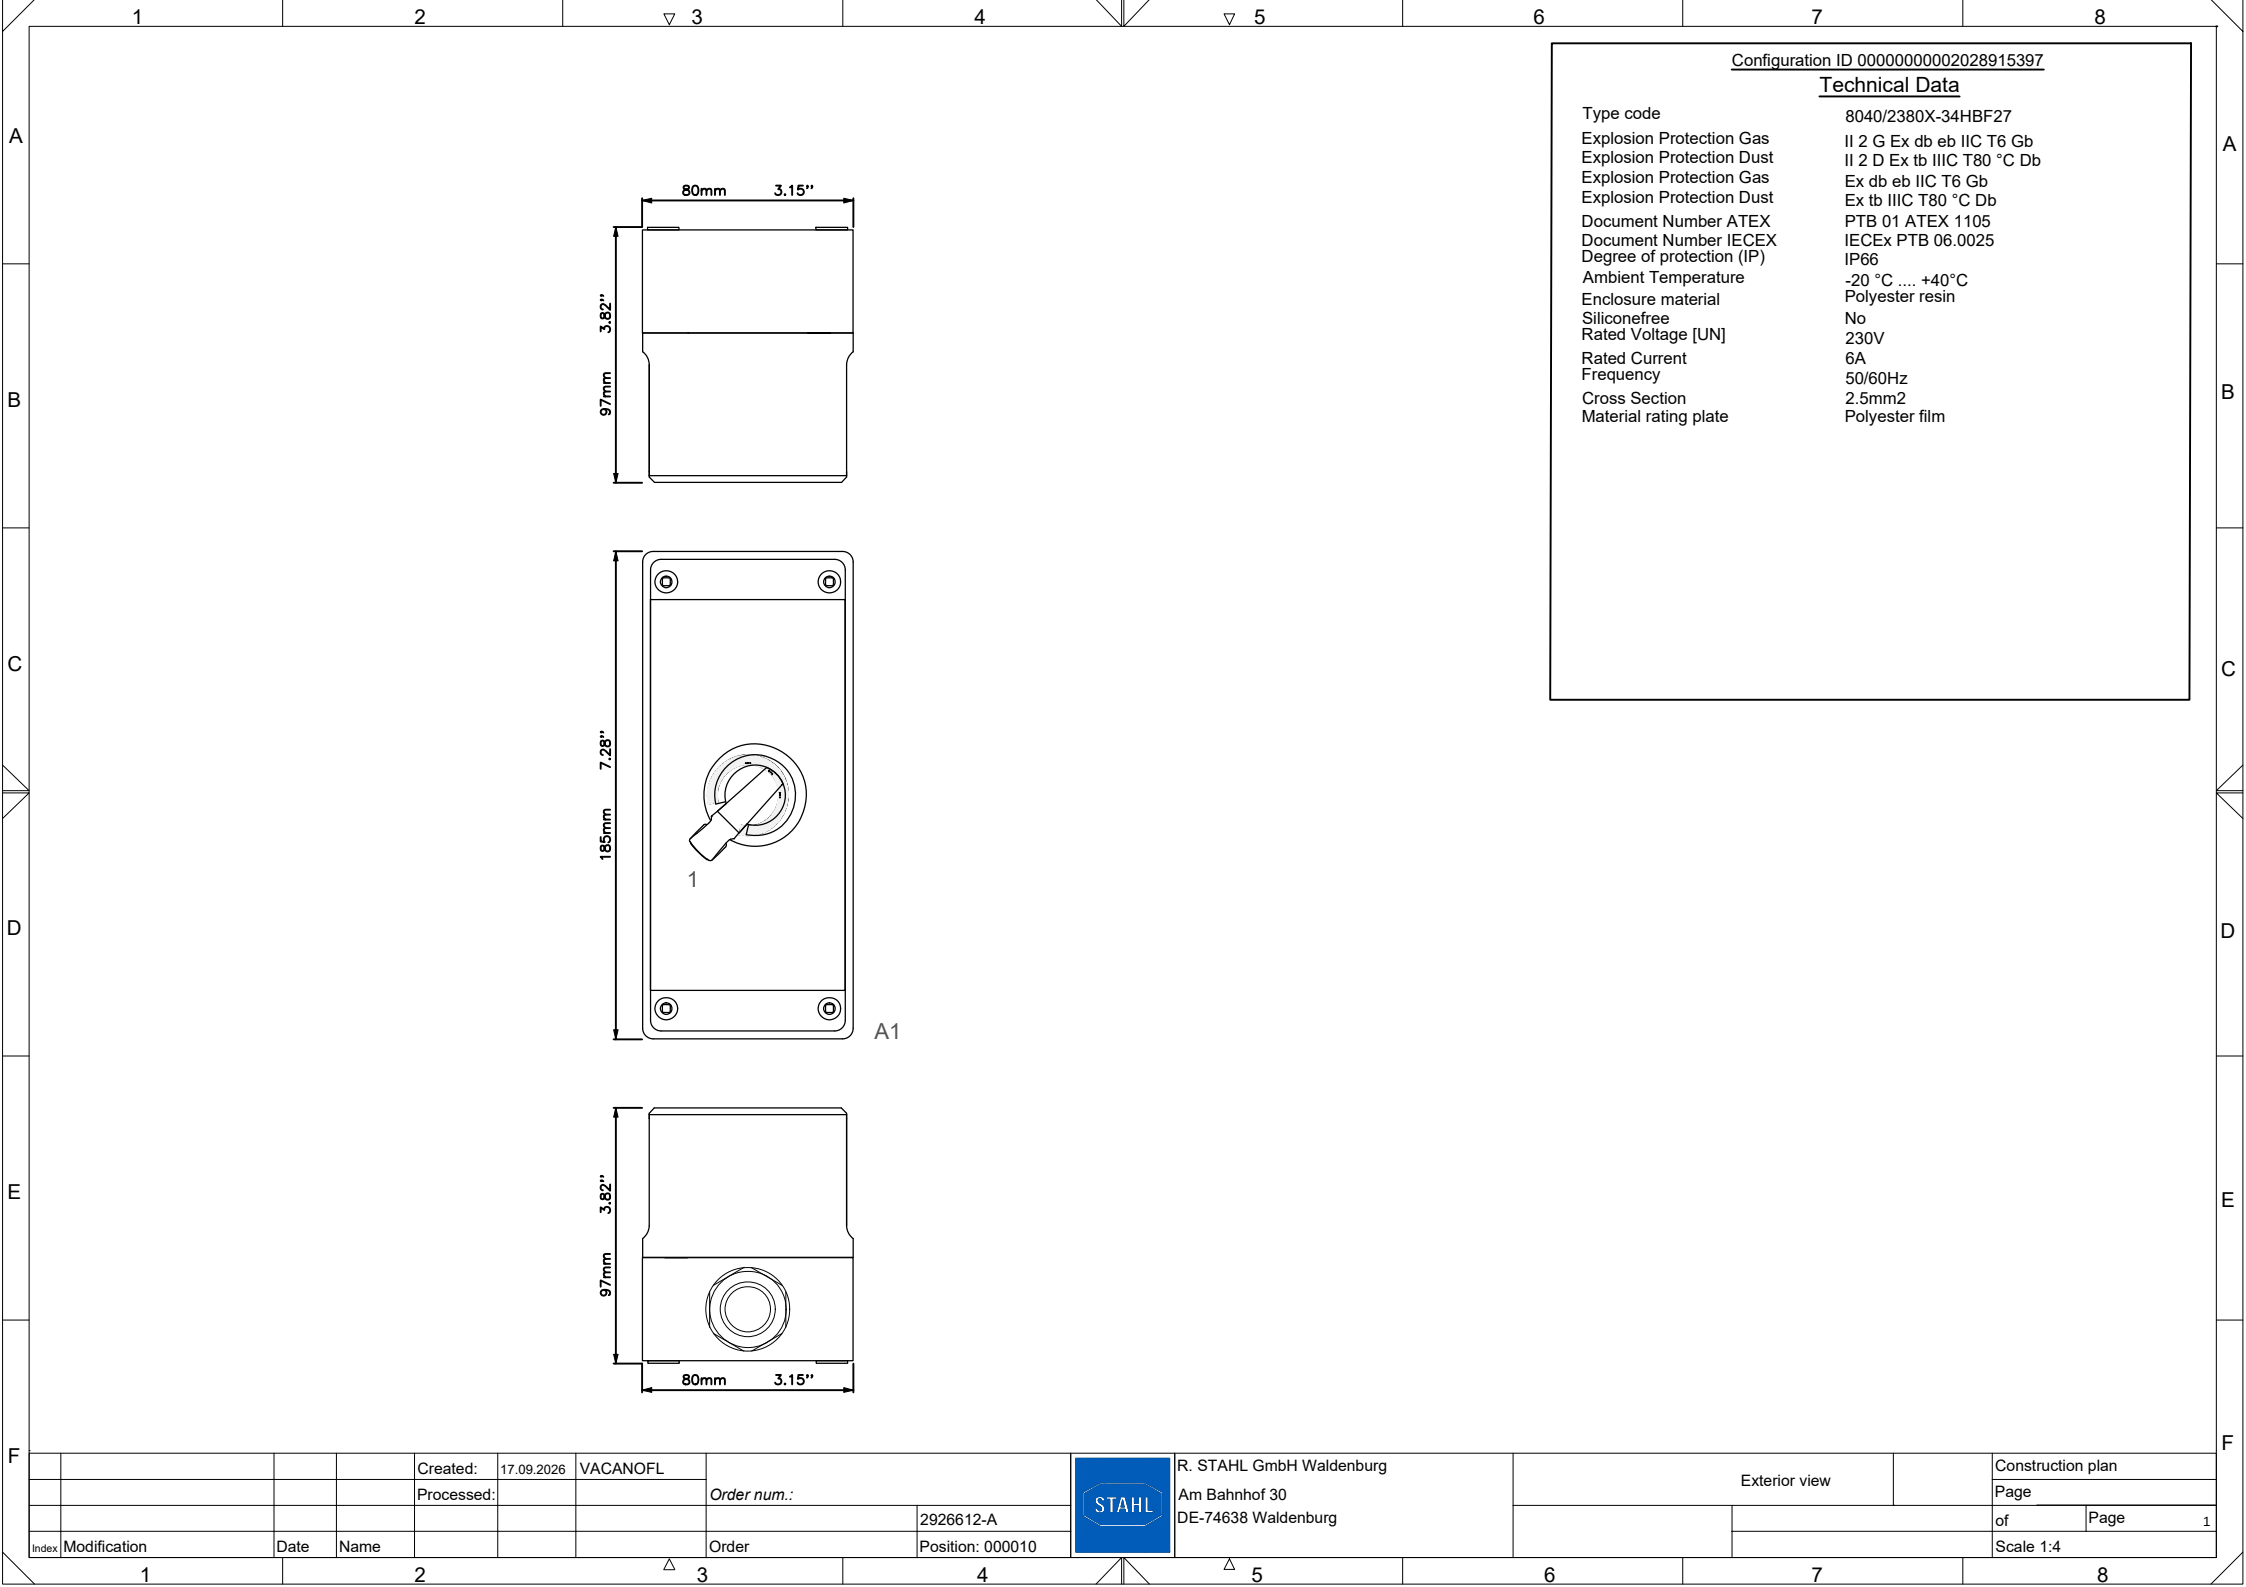


Configuration ID 0000000002028915397

Technical Data

Type code	8040/2380X-34HBF27
Explosion Protection Gas	II 2 G Ex db eb IIC T6 Gb
Explosion Protection Dust	II 2 D Ex tb IIIC T80 °C Db
Explosion Protection Gas	Ex db eb IIC T6 Gb
Explosion Protection Dust	Ex tb IIIC T80 °C Db
Document Number ATEX	PTB 01 ATEX 1105
Document Number IECEX	IECEX PTB 06.0025
Degree of protection (IP)	IP66
Ambient Temperature	-20 °C +40°C
Enclosure material	Polyester resin
Siliconefree	No
Rated Voltage [UN]	230V
Rated Current	6A
Frequency	50/60Hz
Cross Section	2.5mm2
Material rating plate	Polyester film

A1

				Created:	17.09.2026	VACANOFL	STAHL		R. STAHL GmbH Waldenburg Am Bahnhof 30 DE-74638 Waldenburg		Exterior view		Construction plan	
				Processed:									Order num.:	
												2926612-A		
Index	Modification	Date	Name				Order	Position: 000010					Scale 1:4	

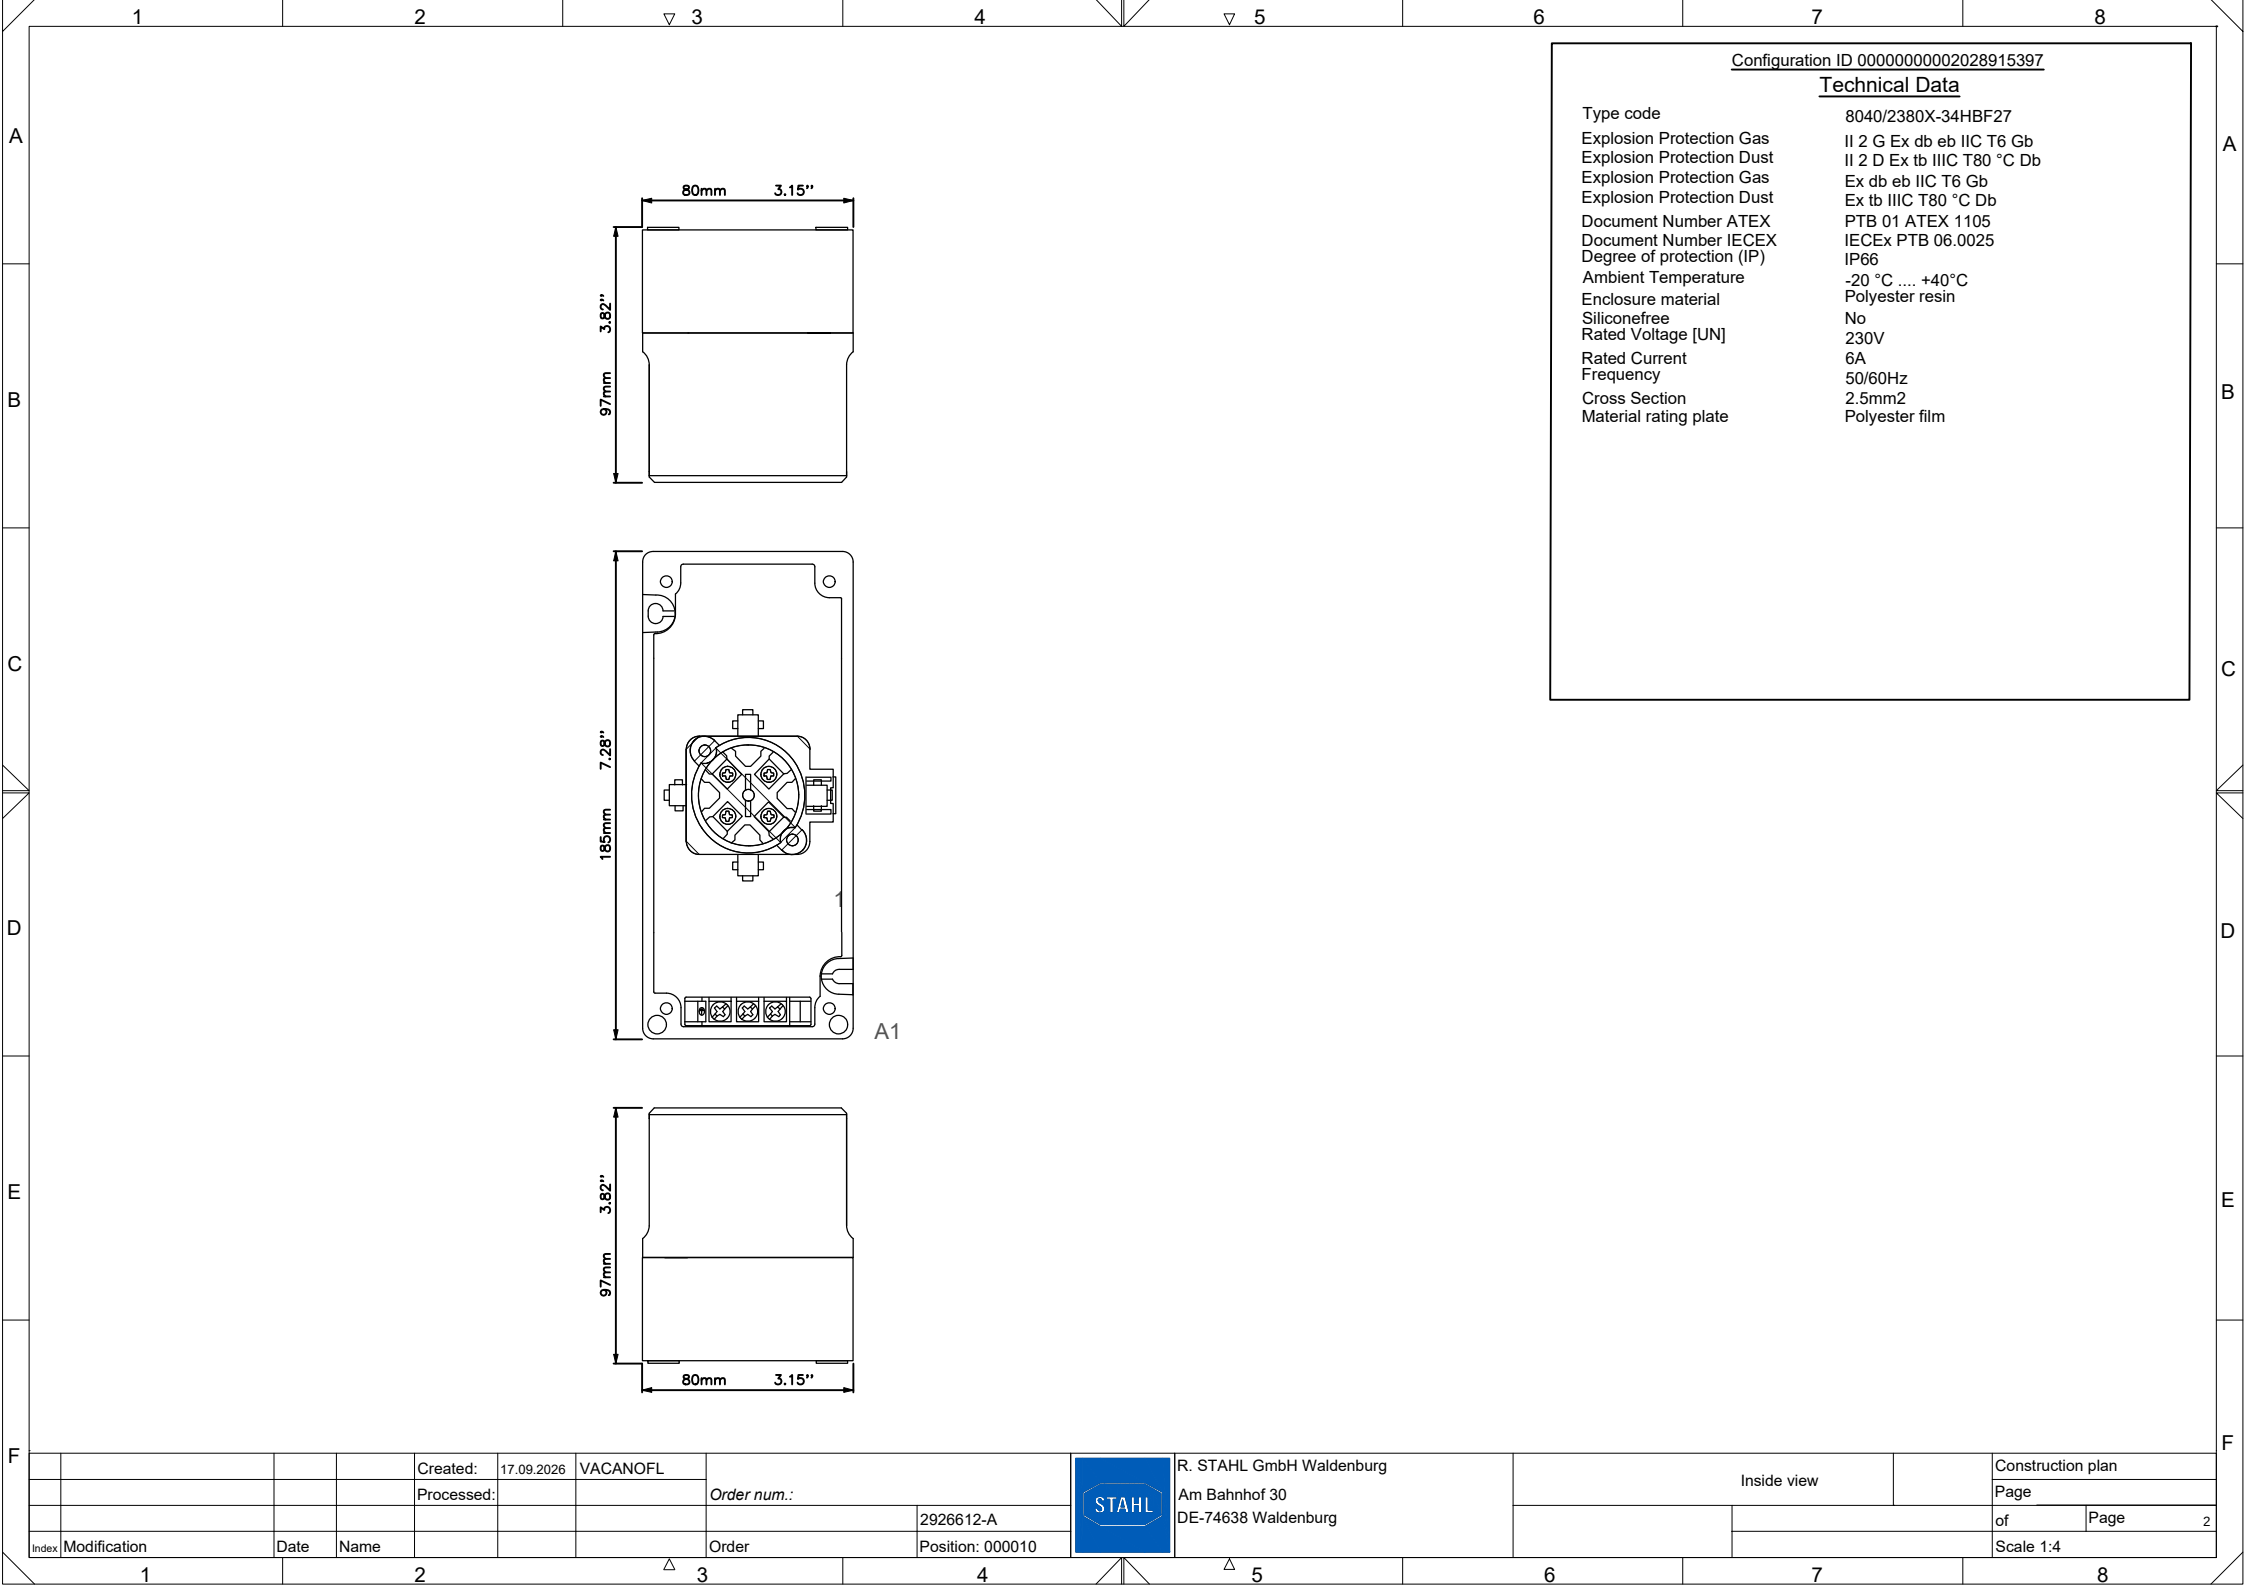

Configuration ID 0000000002028915397

Technical Data

Type code	8040/2380X-34HBF27
Explosion Protection Gas	II 2 G Ex db eb IIC T6 Gb
Explosion Protection Dust	II 2 D Ex tb IIIC T80 °C Db
Explosion Protection Gas	Ex db eb IIC T6 Gb
Explosion Protection Dust	Ex tb IIIC T80 °C Db
Document Number ATEX	PTB 01 ATEX 1105
Document Number IECEX	IECEX PTB 06.0025
Degree of protection (IP)	IP66
Ambient Temperature	-20 °C +40°C
Enclosure material	Polyester resin
Siliconefree	No
Rated Voltage [UN]	230V
Rated Current	6A
Frequency	50/60Hz
Cross Section	2.5mm2
Material rating plate	Polyester film

				Created:	17.09.2026	VACANOFL				R. STAHL GmbH Waldenburg Am Bahnhof 30 DE-74638 Waldenburg	Inside view				Construction plan		
				Processed:											Page		
											2926612-A				of		Page 2
Index	Modification	Date	Name				Order	Position: 000010								Scale 1:4	

Parts list

Row	Quantity	Part of	Name	Description	Additional texts	Manufacturer
1	1		A1	Enclosure 8040 size3 sideD w.holes f.M25		R. STAHL
2	1	A1		8040 Cover raised, size 3 ø30.5mm centred		R. STAHL
3	1	A1		Plate 8040 152x35mm toothed		R. STAHL
4	1	A1	1	8602A3-734-B-45H-E99 , Silicone-free Rotary actuator, small , Padlockable Polyamide		R. STAHL
5	1	1		Label 8602/3 Ø30,8 mm Engravable f.a.726,727	0 I	R. STAHL
6	1	1		8008/2-108 Control switch , No. of poles : 4 Contact material : Silver-nickel		R. STAHL
7	1			8161/7-M25-1707-LT Cable gland M25 7 ... 17 mm Unarmoured cable types , Polyamide , Black		R. STAHL
8	1			PE-terminal 8040		R. STAHL