



	Intended for internal use and customer
--	--

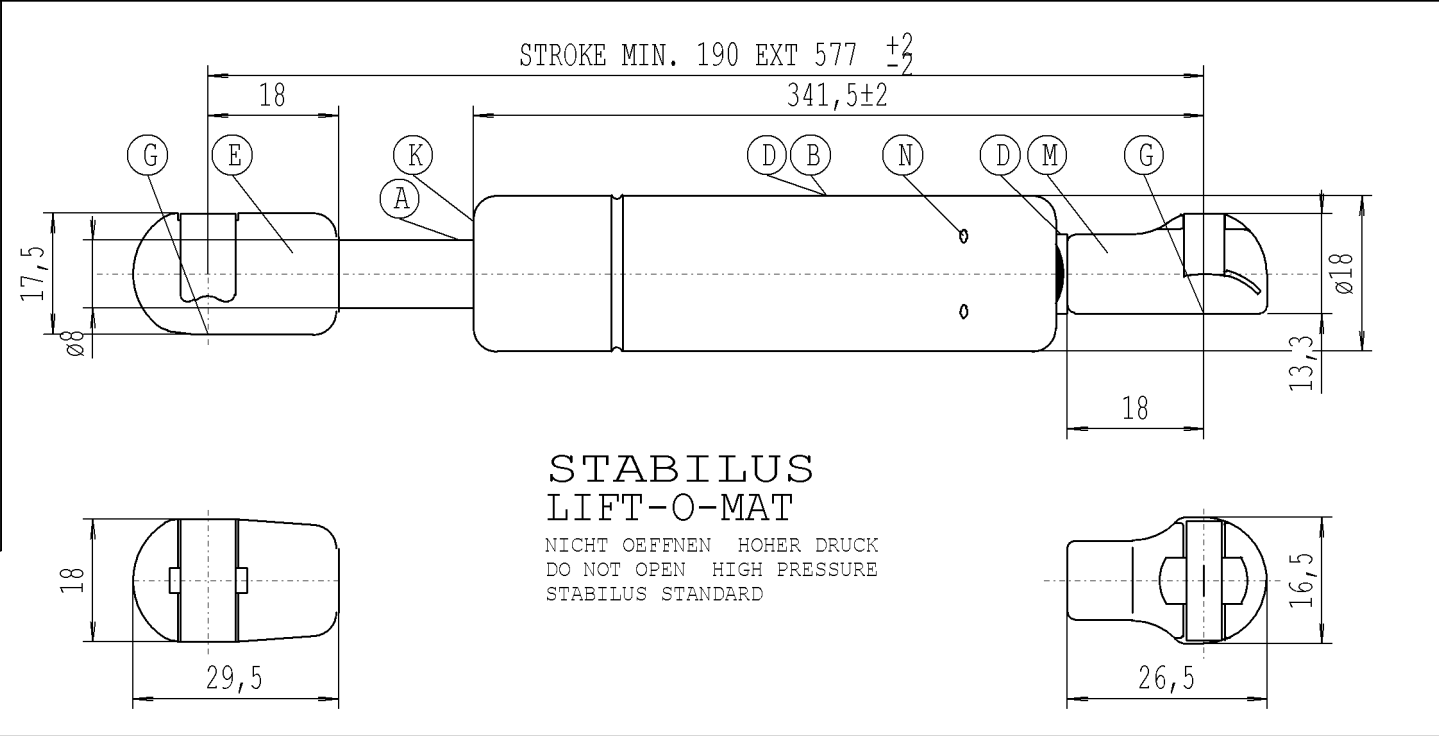

- Permissible operating temperature
range -30°C to +80°C
-Component testing gas spring
acc. STAB-Spec. 10010035
- Unregistered Copy**
Print-out is not subject to the modification service

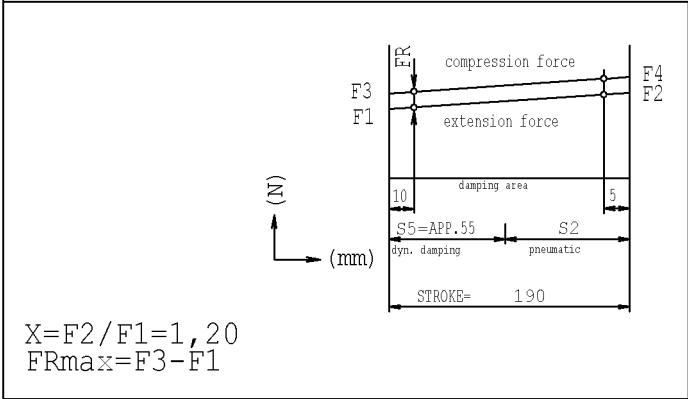

CHANGE	NEW
	OLD
	CHG.NO.
	NAME
	NO.

Forces (statically measured)		
F ₁ (N)	F ₄ max (N)	F _R max (N)
extension force	compression force	friction
530 ±20	740	60

F1 (N)	F4 max (N)	FR max (N)
extension force	compression force	friction
530 ±20	740	60

DIMENSIONS WITH-
OUT TOLERANCE

+/-1

LIFT-O-MAT DD
03 01 0816 10 2

03 01 0816 10 215

STABILUS		
Modifications in favour of technical process reserved		
DRAWING		CHECKED
DATE	28.08.2002	NAME SCHNASS
Document No. 10020566		E
8014RE		