

CAPACITY	SYMBOL/ SERIAL NO.	CIRCUIT DIAGRAM
AC 230V		
65W x 1		

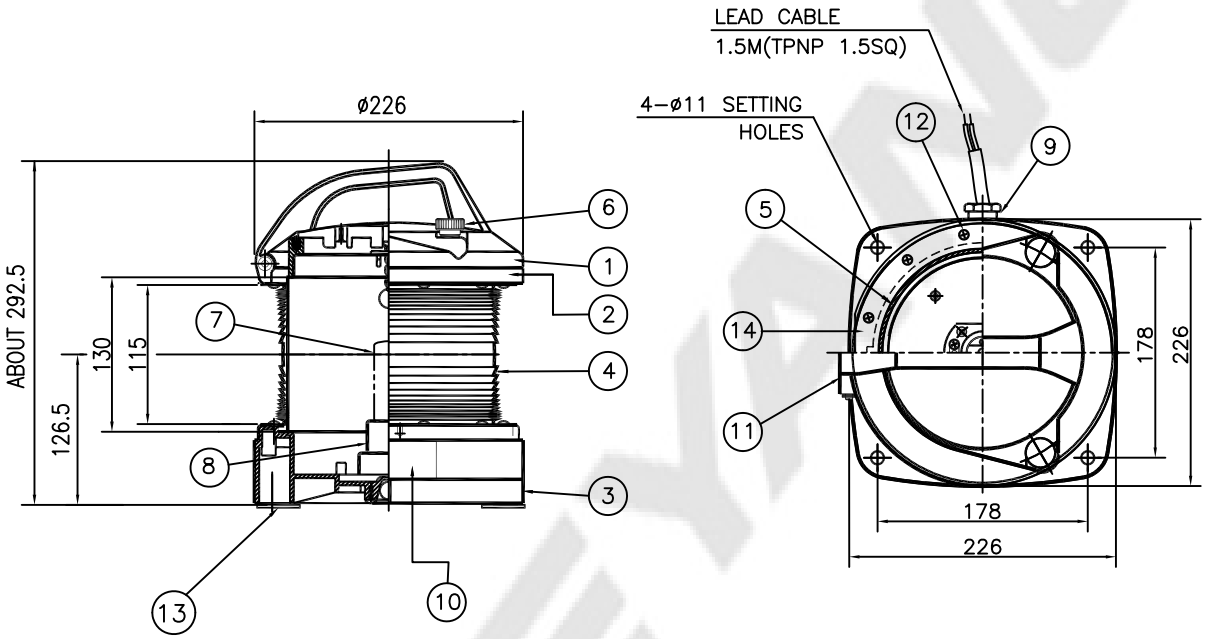

NOTE

1. APPLICATION RANGE : VESSEL OF 50M IN LENGTH AND ABOVE
2. MINIMUM VISIBILITY : 5 N.M

* CAUTION!!
Do not install the navigation light upside down.
Since breathing device is installed on the bottom of fixture.
(설치 시 주의하십시오. 항해등의 바닥에는 호흡기가 설치되어 있으므로 거꾸로 설치하지 마십시오.)



NO	NAME OF PARTS	MATERIAL	Q'TY	REMARKS	NO	NAME OF PARTS	MATERIAL	Q'TY	REMARKS
					7	NAVIGATION LIGHT LAMP	–	1	P28s
13	ANTI-VIBRATION PACKING	C.R.	4	5mm	6	CLAMP BOLT	BRASS	2	
12	T/H TAPPING SCREW	STAINLESS STEEL304	24	M4	5	GASKET	SILICONE RUBBER	1	
11	HINGE	POLYCAR-BONATE	1		4	LENS	POLYCAR-BONATE	1	CLEAR
10	NAME PLATE	STAINLESS STEEL316L	1		3	BODY	POLYCAR-BONATE	1	
9	CABLE GLAND(#20)	NYLON	1	ø12~ø15	2	TOPPER	POLYCAR-BONATE	1	
8	LAMP HOLDER	PPS	1	P28s	1	COVER	POLYCAR-BONATE	1	

APPROVED	B. K. KIM	UNIT	MM
CHECKED		SCALE	N/S
DRAWING	B. I. KIM	COLOR	MAT BLACK
DATE	2015.12.04	IP	56

TITLE;

MANOEUVRING LIGHT

FOR MARINE USE

DAEYANG

MODEL NO.	MVP-SW6523Hh-1.5M-MED	WEIGHT	2.9 Kg
DWG NO.	L32060105	SHEET NO.	19

[보안인증] 김병인 2018/06/12 13:29:42