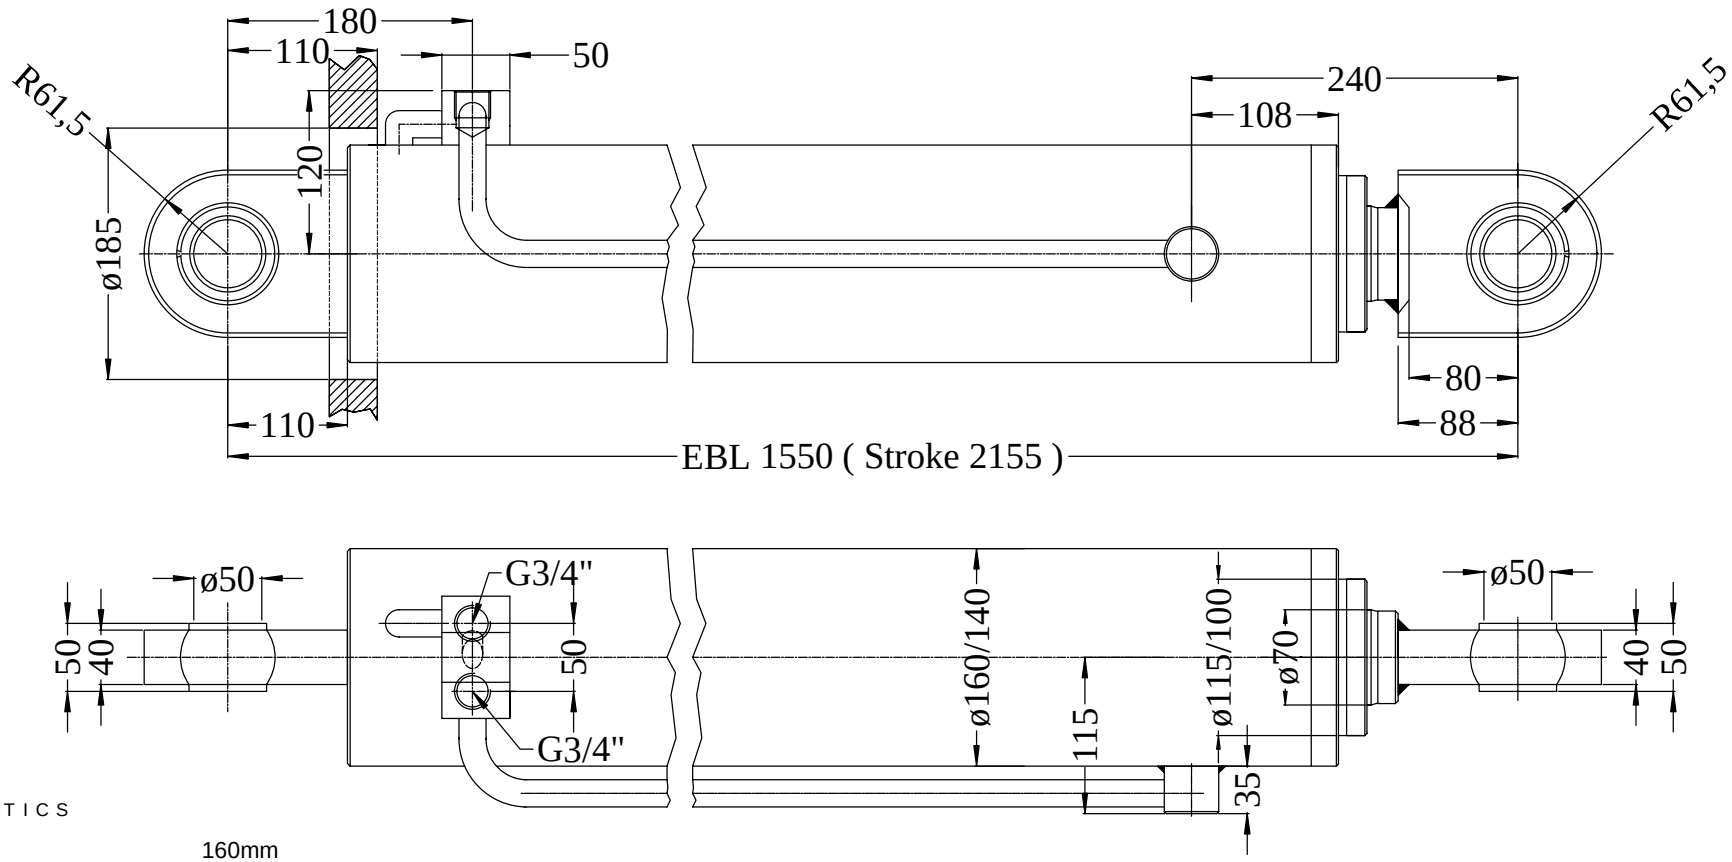

C H A R A C T E R I S T I C S

diameter tube	160mm
diameter piston	140 / 100mm
diameter rod	115 / 70mm, hard plating 2x 30 µm
total stroke	2155mm
closed measure length by middle eyes	1550mm
attachment on both bottoms	Spherical bearings ø50
fixed damping	--------
p work	200 bar
pp test	300 bar
undercoat	grey, QS - SIEGEL
oil volume piston side (liters)	16,93 / 8,64
oil volume rod side (liters)	5,51 / 4,41
pressure (kN)	307,87 / 157,08
pull (kN)	100,14 / 80,11

Bitte beachten: Es gelten unsere AGB´s sowie der verlängerte Eigentumsvorbehalt, bis zur vollständigen Kaufpreiszahlung.
Please note! Our trade terms and reservation of title are valid until the complete purchase costs are paid.

Email: mail@agirossi.de Internet: www.agirossi.de
Tel.: +49 6724-95252 Fax: +49 6724-95254
Schutzvermerk nach DIN 34 beachten / copyright according to DIN 34

	Änderung / revision	Datum / date	Name
A			
B			
C			

	Datum / date	Name
Gez. drawn	11.04.2002	Michalik
Gepr. checked		
Geneh. appr.		

Maße ohne Toleranzangaben DIN 7168 mittel

AGIROSSI INDUSTRIETECHNIK

Mantel / tube	Stange / rod	Gewicht / wt	Modell / model
St. 52.3 - H8	39 NiCrMo3 ○ 18 MnV5 ○ C 45 ●	0000 kg	Hydraulic cylinder

Firma / customer

Purchase Order Number
056277 and 056278

Bezeichnung / title
DTZ-2-2155-EBL1550-CH-VR-SO
double acting telescopic cylinder

Art.-N° / drw. no. 3914210

Blatt : __ von __
sheet : __ of __