
◇带端子箱型Terminal Box Type②

重量Weight:电动机Motor:1.75kg 减速器Gearhead :0.80kg

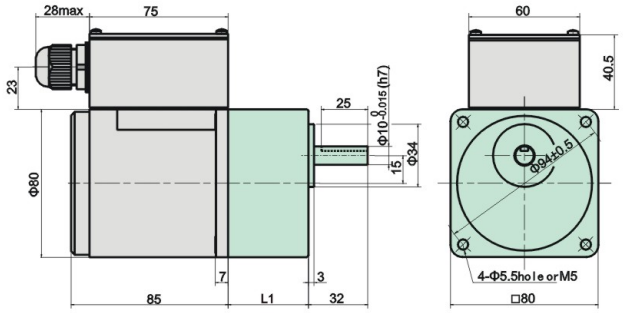


电动机型号 Motor Model	减速器型号 Gearhead Model	减速比 Gear Ratio	L1
4IK25GN-ATJ 4IK25GN-ETJ 4IK25GN-CTE 4IK25GN-HTE 4IK25GN-ST	4GN□K	3~18	32
		25~200	42.5

● 减速器型号的□中为减速比的数值
Enter the gear ratio in the box (□) within the model name


● 适用电缆直径为Use cable with a diameter of Φ6~Φ12mm

◇键・键槽(减速器附件)Key・Key Slot
(The key is included with the gearhead)




◇圆轴型的转轴部分Shaft Section of Round Shaft Type

除重量及轴部外,电动机外形与齿轮轴型相同。
Excluding weight and the shaft section
Motor shape are the same as those of the pinion shaft

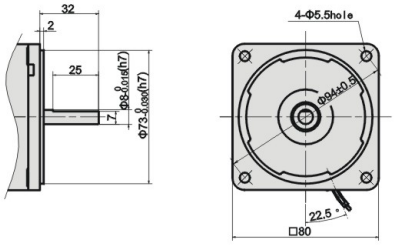


◇中间减速器 Decimal Gearhead

可安装在GN齿轮轴型上。
Can be connected to GN pinion shaft type
4GN10XK
重量weight:0.41kg



电容器外形尺寸Capacitor Dimension

型号 Model		电容器型号 Capacitor Model	L	W	H
齿轮轴型 Pinion Shaft	圆轴型 Round Shaft				
4IK25GN-A□J	4IK25A-A□J	ZD80CFAUL	47	22	34
4IK25GN-E□J	4IK25A-E□J	ZD70CFAUL	47	22	34
4IK25GN-C□E	4IK25A-C□E	ZD15BFAUL	37	14	28



● 常规电容器出线为引线，也可跟据客户要求配置插片式187#
Note: Conventional capacitor is a lead wire type.Inserted 187# is optional

● 电动机型号的□中为表示带端子箱型的记号(T)
Enter the code that represents the terminal box type "T" in the box(□) within the model name.