
TSUBAKI

ON THE DRAWING, { } ARE FOR REFERENCE ONLY


NOTES

1. Distance between both flanges: 19 ±0.25 mm
2. Tightening torque of U-NUTS (M22) : 568 N·m {58 kgf·m}
3. Allowable times for attaching & removing of U-NUT: 20

TORQUE CAPACITY N·m {kgf·m}		13700 {1400}
MAX. MISALIGNMENT	ANGLE (°)	0.5
	PARALLEL (mm)	1.1
△1 END FLOAT CAPABILITY (mm) (ANGLE MISALIGNMENT 0°)		±2.1

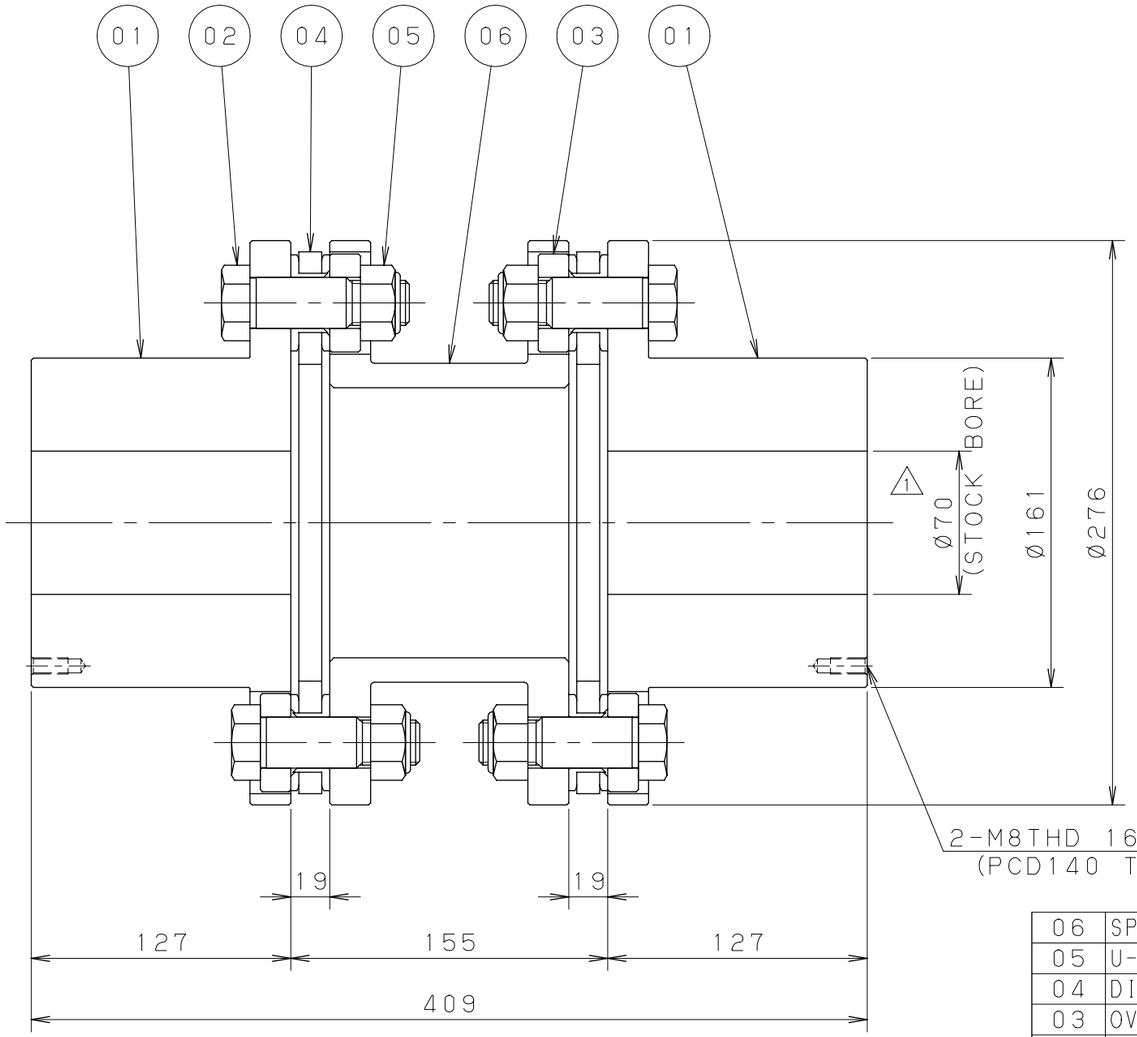

SECTION X-O-Y

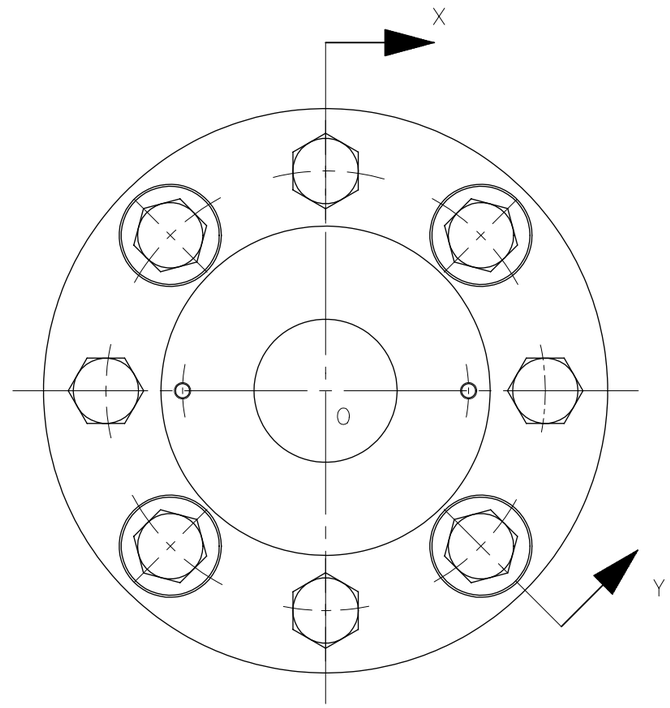

ALL DIMENSIONS ARE IN M.M.

PART NO.	NAME OF PART		REQ.D
06	SPACER	*	1
05	U-NUT	M22	16
04	DISCSET	*	2S
03	OVERLOADWASHER	*	16
02	REAMER BOLT	*	16
01	HUB	*	2

MARK	REVISION	DATE	BY	MFG. NO.	REQ.D	DATE	BY
△*	*	*	*	* *	*	*	*
△*	*	*	*	* *	*	*	*
△*	*	*	*	* *	*	*	*
△2	ACCORDING TO S10-361	2006/08/21	M.T	* *	*	*	*
△1	S10-135	01-11-96	K.T	*		*	*

APP'D T.UEDA	PROJECTION	CUSTOMER
C'K'D S.FUJII	SCALE 1:3	TITLE DISC COUPLING NEH14W-NRXNR
DWN S.MORIMOTO	DATE DRAWN 02-14-91	ASSEMBLY DRAWING
株式会社 椿本チエイン TSUBAKIMOTO CHAIN CO. JAPAN	MODEL NO. 形番	DRAWING NO. 10J14C0000 Ⓔ △2

A3 0 50