



DATA SHEET HOSE REEL REELCRAFT

Heavy Duty Hand Crank Hose Reel

Series 30000 - 1/2" fluid path, supplied without hose

Heavy duty hand crank reel with gooseneck for applications that require long lengths of hose and large storage capacity. The all-bolted unitized construction, full flow swivel and heavy gauge steel frame, spool and drum give a long service life. Vibration-proof, self-locking fasteners make the reel suitable for industrial and field use.

Model number: CA32106 M118

High pressure hand crank reel with gooseneck

Suitable for max. 61 m 1/4" hose, 43 m 3/8" hose

or 30 m 1/2" hose (hose not included)

(1/2" hose: I.D. 13 mm, O.D. 22 mm)

Max. working pressure: 350 bar

Max. temperature: 99 °C

Reel inlet: 1/2" NPT female

Reel outlet: 1/2" NPT female


Material: steel, powder coated (red)

Weight: 19 kg (without hose)



Illustration: Series 30000 hand crank reel

Dimensions Hose reel CA32106 M118

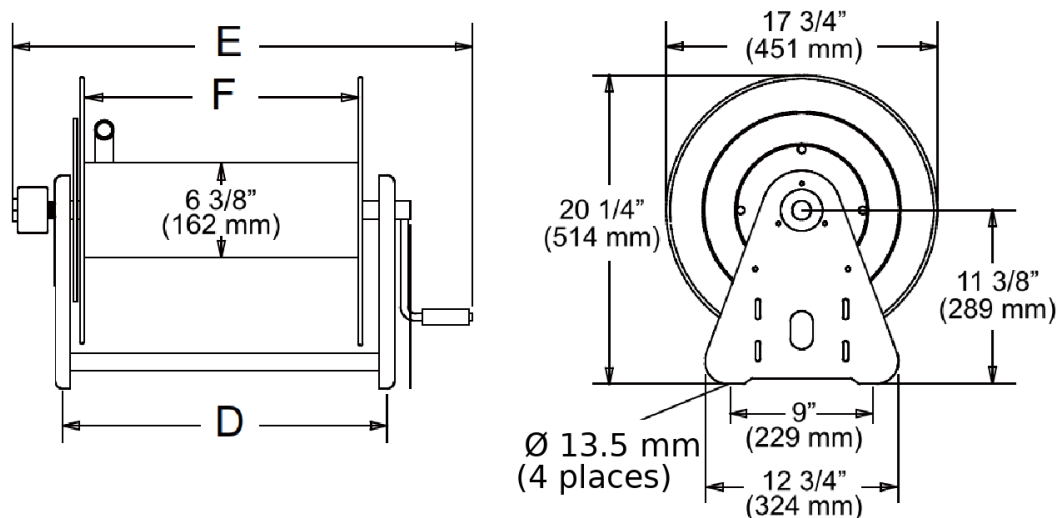

Dimensions D 248 mm E 502 mm F 152 mm