

NL180.1-6160K


CAPACITOR FOR INDUCTION HEATING

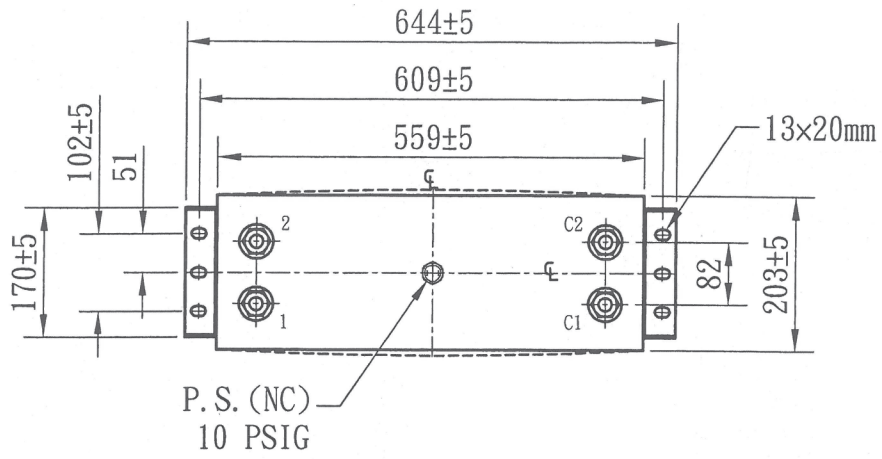




3300VAC 180.1uF

Internal Connection

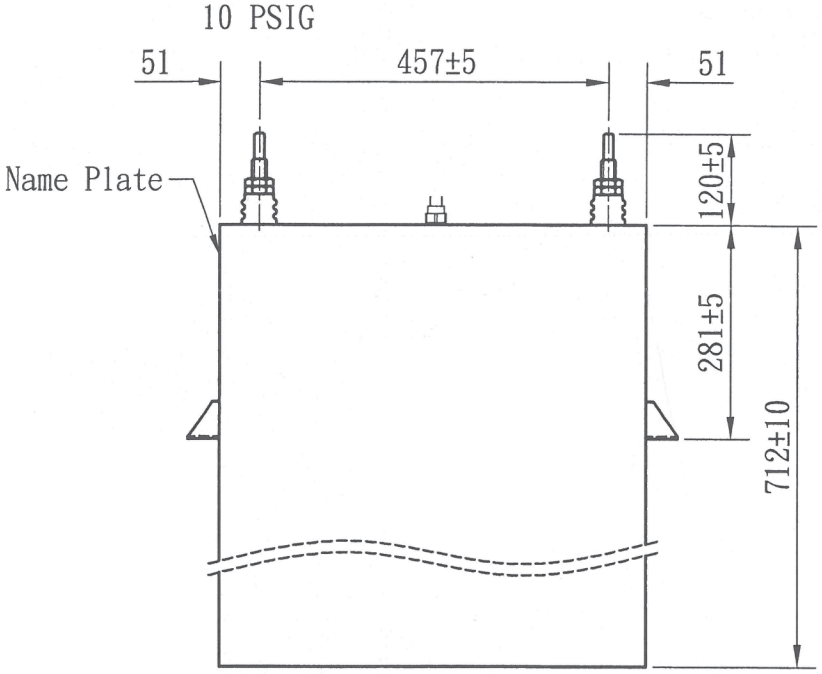

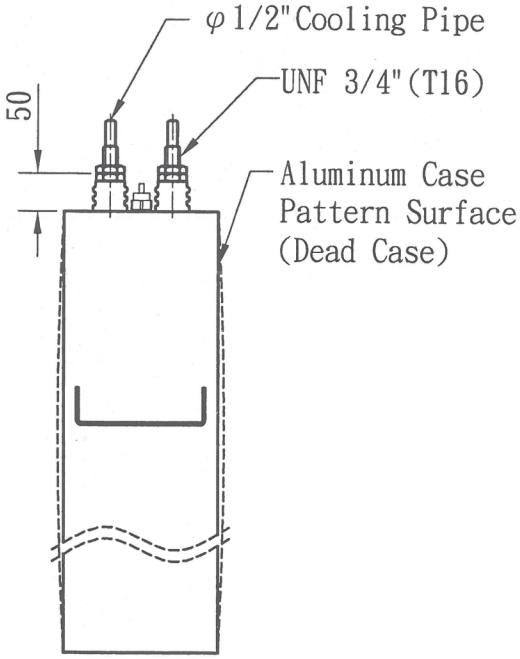

SPECIFICATION & PERFORMANCES:

1. Standards: IEC 60110-1:1998
2. Ambient temperature: -20℃～+50℃
3. Capacitance tolerance: -5%～+10%
4. Maximun permissible voltage: 105% of rated voltage.
5. Maximun permissible current: 115% of rated current.
6. Voltage Withstand: (a)Between Terminals: 6600VAC/1min
   (b)Terminals to Case: 7600VAC/1min
7. Discharge character: After the capacitors are disconnected from the power source, the residual voltage drops to 50 volts or lower within 5 minutes.
8. Dissipation Factor: Less than 0.1%.
9. Outlet temperature less than 45℃.
10. Impregnation: C101 (Non-PCB)
11. Approx. Weight: 112kgs

High Frequency Capacitor For Furnace

3300VAC 500Hz 6160kVAR 180.1uF 1867A

Permissible torque
≦12 FT-LBS

Others size: Tolerance ±3

Richardson Electronics
POWER & MICROWAVE TECHNOLOGIES

relltubes.com | sales@rell.com

40W267 Keslinger Road
LaFox, IL 60147 USA

1.800.348.5580 (USA & Canada)
1.630.208.2200 (International)

2018 Richardson Electronics, Ltd and it's affiliates reserve the right to make changes to the product (s) or information contained herein without notice. Richardson Electronics assumes no responsibility for any errors which may appear in this document. No part of this document may be copied or reproduced in any form or by any means without the prior written consent of Richardson Electronics, Ltd.

Rev. 10/15/2026