
外形图(单位:mm)Dimensions(Unit:mm)

减速器附有安装用螺丝Mounting screws are included with gearhead.

◇导线型 Lead Wire Type

重量Weight:电动机Motor:4.3kg 减速器Gearhead :1.5kg

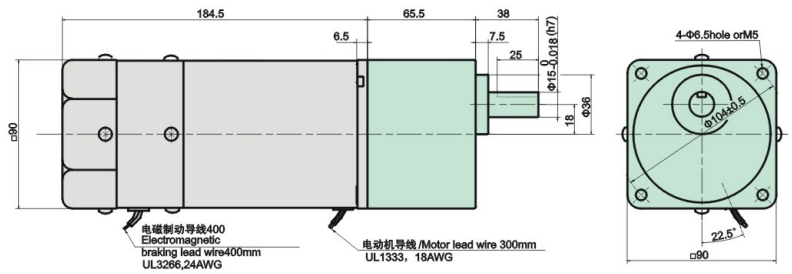


电动机型号 Motor Model	减速器型号 Gearhead Model	减速比 Gear Ratio	L1
5RK120GU-AFMJ 5RK120GU-EFMJ 5RK120GU-CFME 5RK120GU-HFME 5IK120GU-SFM	5GN□KB	3~200	65.5


● 减速器型号的□中为减速比的数值
Enter the gear ratio in the box（□）within the model name

◇凸缘安装型减速器Flange Mounting Reducer

可安装在GU齿轮轴型上
Can be mounted on GU type gear shaft)
5GU□K
重量Weight:1.5kg

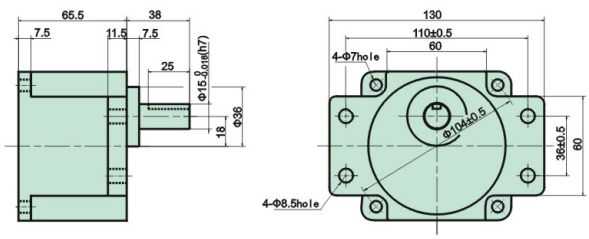


◇键・键槽(减速器附件)Key・Key Slot (The key is included with the gearhead)




◇圆轴型的转轴部分 Shaft Section of Round Shaft Type

除重量及轴部外,电动机外形与齿轮轴型相同。
Excluding weight and the shaft section
Motor shape are the same as those of the pinion shaft

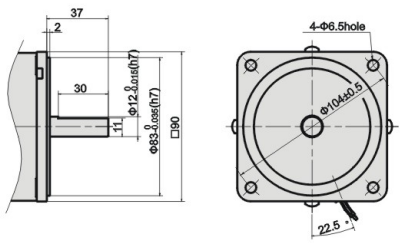

◇中间减速器 Decimal Gearhead

可安装在GN齿轮轴型上。
Can be connected to GN pinion shaft type
5GU10XK
重量weight：0.6kg

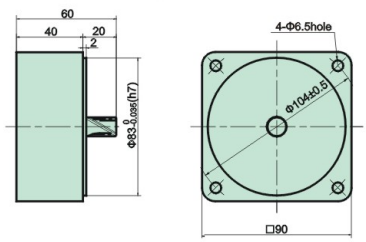

电容器外形尺寸Capacitor Dimension

型号 Model		电容器型号 Capacitor Model	L	W	H
齿轮轴型 Pinion Shaft	圆轴型 Round Shaft				
5RK120GU-AFMJ	5RK120A-AFMJ	ZD350CFAUL	57	32	46
5RK120GU-EFMJ	5RK120A-EFMJ	ZD300CFAUL	57	32	46
5RK120GU-CFME	5RK120A-CFME	ZD80BFAUL	47	26	38

● 常规电容器出线为引线，也可跟据客户要求配置插片式187#
Note: Conventional capacitor is a lead wire type.Inserted 187# is optional

