


CAPACITY	SYMBOL/ SERIAL NO.	CIRCUIT DIAGRAM
AC 100~120V, 50/60Hz	LF-2	
25W		

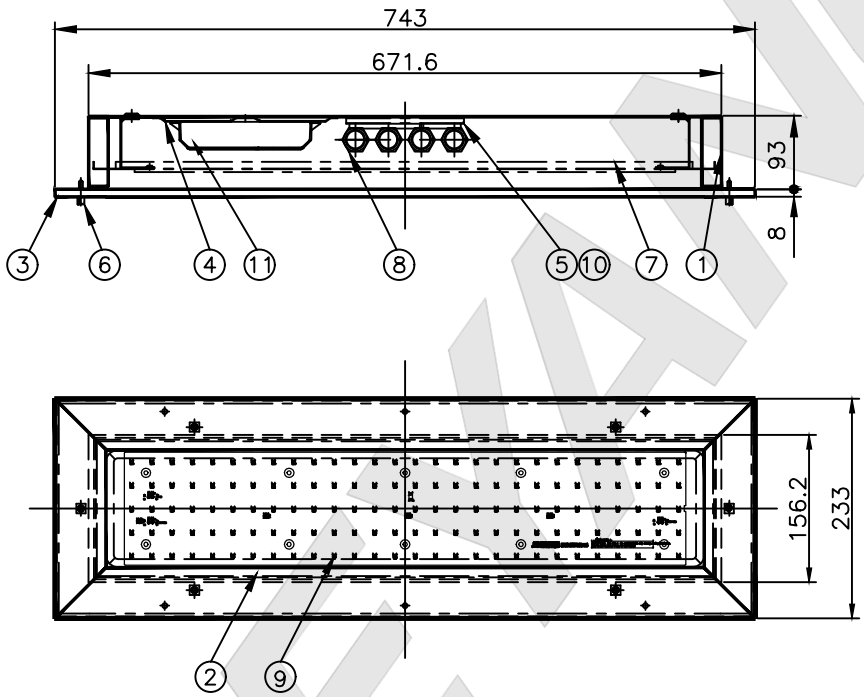

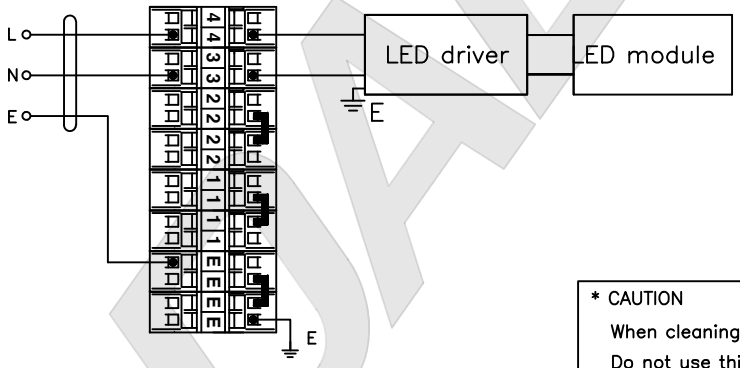

CIRCUIT DIAGRAM

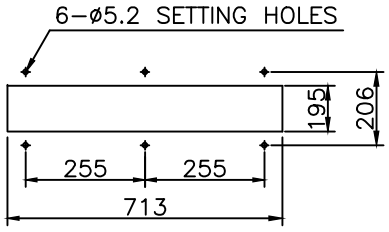

CUTTING DIMENSION

* CAUTION
When cleaning globe, please wipe clean with a damp cloth.
Do not use thinner or (organic) solvent.
GLOBE 청소 시, 젖은 천으로 깨끗이 닦으십시오.
희석제와 (유기)용제를 사용하지 마십시오.

NO	NAME OF PARTS	MATERIAL	Q'TY	REMARKS	NO	NAME OF PARTS	MATERIAL	Q'TY	REMARKS
11	LED driver	–	1		6	COVER BOLT	BRASS	6	
10	TERMINAL BLOCK	NYLON	1	CLAMPING 8P	5	TERMINAL BLOCK BKT	STEEL	1	
9	LED module	–	1	5,000±300K	4	LED driver BKT	STEEL	1	
8	CABLE GLAND	NYLON	4	PG16 (ø12~16mm)	3	GLOBE FRAME	ALUMINUM	1	
7	REFLECTOR	STEEL	1		2	GLOBE	ACRYL	1	
					1	BODY	STEEL	1	

APPROVED	B. K. KIM	UNIT	MM
CHECKED	J. W. PARK	SCALE	N/S
DRAWING	H. S. SHIN	COLOR	N-9.3
DATE	2016.02.01	IP	44

TITLE;

LED CEILING LIGHT IP44
(FLUSH TYPE)
FOR MARINE USE

DAEYANG

MODEL NO.	LEB125WF-0000SAC50-WG	WEIGHT	5.59 kg
DRAWING NO.	LO1100312	SHEET NO.	6

2025-11-10 오후 6:59:29, RPABOT3 [보안인증]