

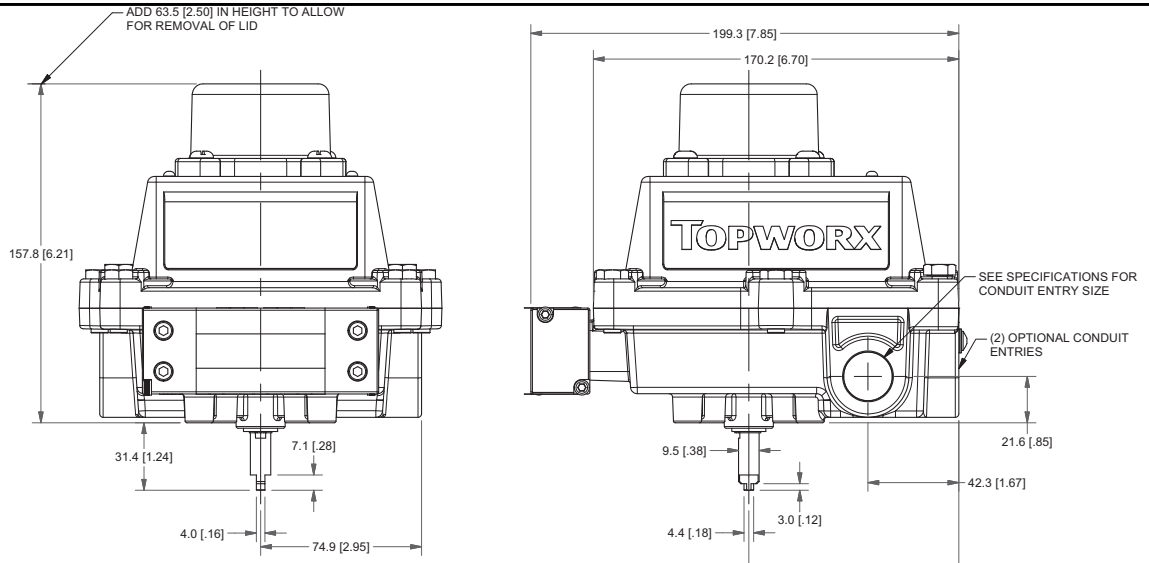


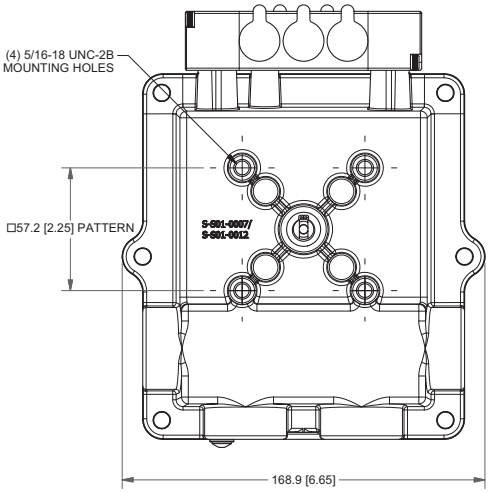

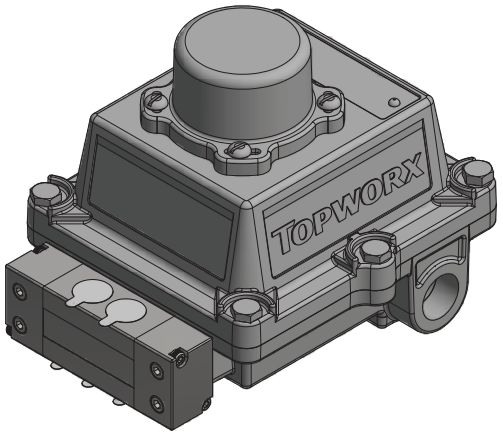

NAMEPLATE

UL-BR 23.0804X


Ex ib IIC T4 Gb; -20°C≤ Ta ≤ 50°C
IP66
BUS: Ui: 30V, Ii: 380mA, Pi: 1.5W, Ci: 5nF, Li: 10µH

Telemedição Equipamentos para uso em Locais Perigosos
AVISO: A substituição de componentes pode prejudicar a segurança intrínseca. O instalador deve confirmar quais subconjuntos certificados estão equipados e garantir a conformidade com os parâmetros de entidade no certificado aprovado. Risco potencial de carga eletrostática - Limpe apenas com pano úmido.

TOPWORX
Designed in Louisville, Kentucky, USA
Assembled in USA

Model #:

Serial #:

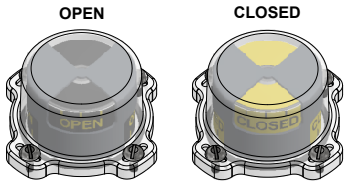

MODEL NUMBER

DXS-FP0BN4BP620B


PRODUCT LINE

Switchbox DXP and DXS

SPECIFICATIONS

Enclosure	316 stainless steel
Bus/Sensor	Foundation Fieldbus w/ (2) GO™ Switches SPDT and 0-10K potentiometer
Area Classification	Intrinsically safe
Visual Display	90° Black OPEN, Yellow CLOSED
Shaft	NAMUR 316 stainless steel
Conduit Entries	(2) ¾" NPT, (2) ½" NPT
O-Rings	Buna-N
Pilot	(1) piezo pilot, fail open/closed - ASCO
Spool Valve	316 stainless steel - ASCO
Valve Cv	1.06Cv (1/4" NPT Ports, Exhaust Ports 1/4" NPT)
Manual Override	No manual override
Regional Certification	InMetro
N Switch	No N Switch

WIRING DIAGRAM

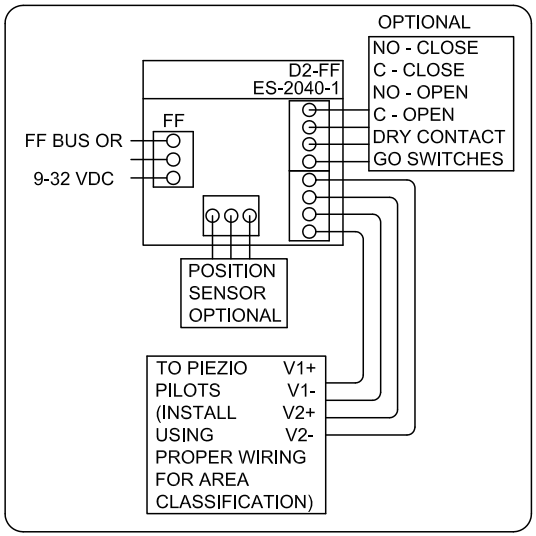

Current as of November 9, 2026 – Subject to change without notice.

TOPWORX™
3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com