
Signaline FT-230-X

Fixed Temperature Linear Heat Detector

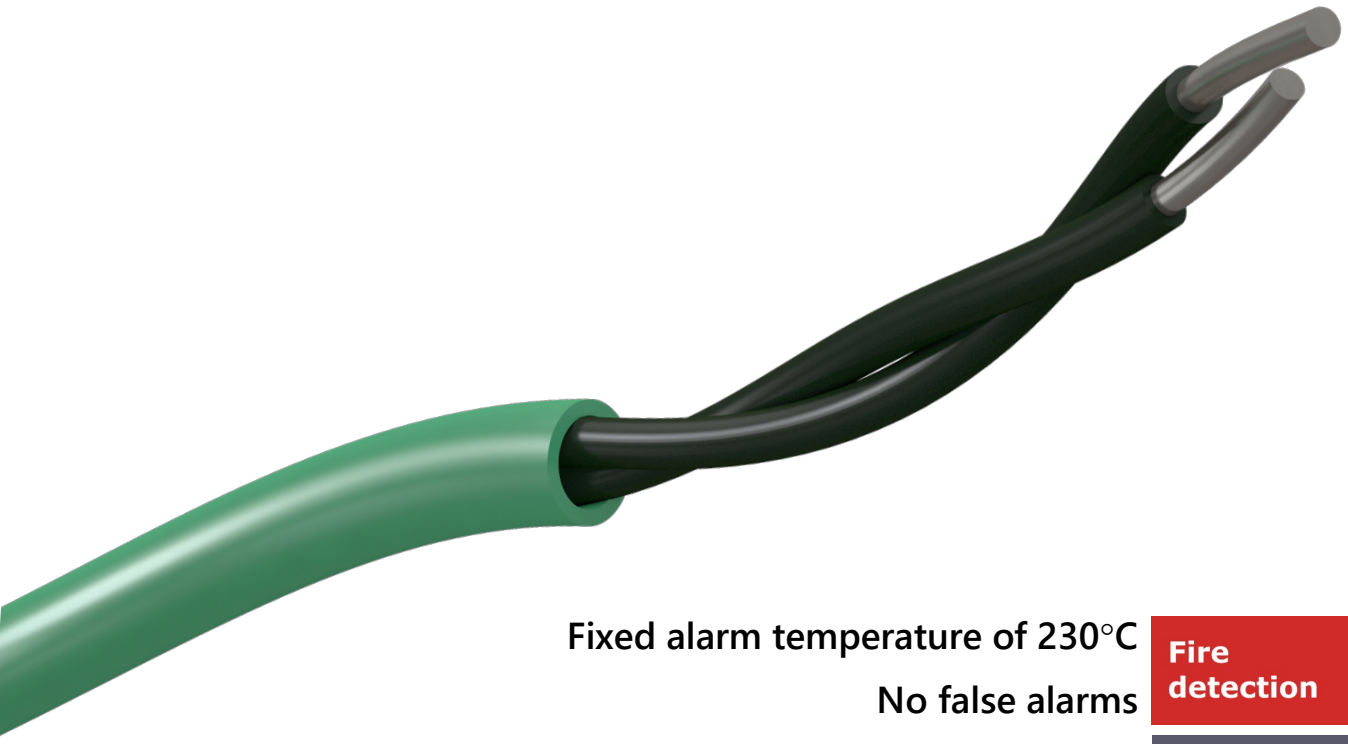

Fixed alarm temperature of 230°C

No false alarms

Up to 3,000m per zone

Rubber extrusion

Fire detection

Signaline

Tel: +44(0)1252 725257
Email: sales@lgmproducts.com
Address: LGM Products Ltd, Unit 15 Riverside Industrial Park, Farnham, Surrey, GU9 7UG, United Kingdom.

Revision 1.1 (2019)
Web: www.lgmproducts.com

© 2019/20 LGM Products Ltd.

ISO 9001:2015 certified

Model	Signaline FT-230-X
Alarm temperature	230°C (445°F)
Max ambient temp.	170°C (338°F)
Conductor resistance	0.1Ω/M or 0.029Ω/FT @20°C
Max voltage	42Vdc or 30Vac
Dielectric withstand (UL)	500Vdc
Tensile strength	1700 N/mm²
Minimum bend radius	75mm
Overall diameter	5mm
Weight	25kg/500M
Outer sheath material	Chemical resistant high temp. rubber Stainless steel braiding available
Colour	Green
Approvals	UL, cUL


Signaline Fixed Temperature Linear Heat Detector (Signaline FT) can detect a build-up of heat anywhere along its length. When any point along the length of the cable reaches a predetermined temperature an alarm is initiated.

Signaline FT is available in multiple temperature settings and outer cover options, making the product suitable for use in a very wide range of applications.


Multiple fixing options and accessories are available.

Visit Signaline.com for our complete catalogue.


Conventional Systems

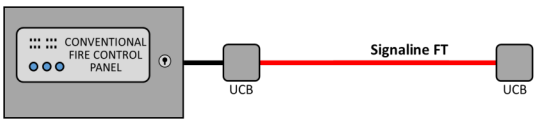

Addressable Systems

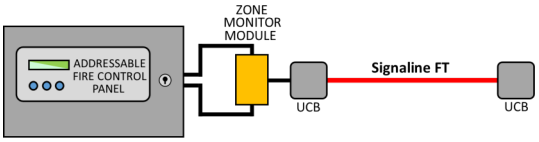

Hazardous Areas

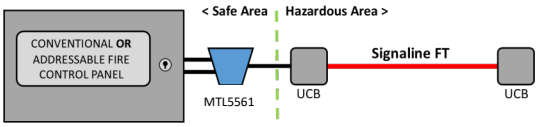



Compatible with the new Signaline LocatorPlus Dual Zone Monitor Module

Signaline FT cable is proudly manufactured in the UK

Tel: +44(0)1252 725257 Revision 1.1 (2019)
Email: sales@lgmproducts.com Web: www.lgmproducts.com ISO 9001:2015 certified
Address: LGM Products Ltd, Unit 15 Riverside Industrial Park, Farnham, Surrey, GU9 7UG, United Kingdom.
© 2019/20 LGM Products Ltd.