MTN/2285IW Series

Intrinsically safe submersible velocity transducer 4-20mA output for PLC interface
ATEX & IECEx Group II approved

ATEX and IECEx Group II certified. Submersible, general purpose, top-entry velocity transducer with DC output. Made from robust stainless steel throughout for continuous vibration monitoring in harsh underwater environments and areas with constant moisture or condensation. Internal electronics are enclosed in a Faraday cage and isolated to minimise noise. Sealed to IP68 with industry standard two-wire 4-20mA output proportional to sensor range that can connect directly to PLC, DCS and other industrial controllers. Includes integral heavy duty polyurethane cable and is available with a wide range of mountings.


Applications

- Intrinsically safe data collector
- Oil and gas
- Submersible pumps, fans and compressors
- Mining

MTN/2285IW



Dimensions

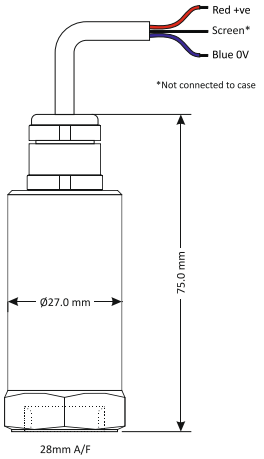

Technical

Output current	4-20mA DC proportional to rms velocity (mm/s)
Supply voltage	12-32V DC (4-20mA)
Frequency response	2Hz to 1kHz ±10 %
Mounted base resonance	5kHz (nominal)
Isolation	Base isolated
Dynamic range	50g peak
Transverse sensitivity	Less than 5%
Temperature range	(-55°C ≤ Ta ≤ +65°C)
Temperature sensitivity	0.08%/°C
Case material	Stainless steel
Cable[1]	Integral polyurethane - length to be specified at point of order
Maximum cable length	See system drawing ATX038
Mounting torque	8Nm
Weight	150g (nominal)
Sealing	IP68
Submersible depth	5m max (0.5 bar)
Insulation	Units will pass a 500V insulation test

Certificate details

Group II[1]	BAS02ATEX1057X and IECEx BAS 08.0013X Ex ia IIC T6 Ga (-55°C ≤ Ta ≤ +65°C) Ex ia IIIC T85°C DA (-55°C ≤ Ta ≤ +65°C)
Terminal parameters	Ui = 28V, Ii = 93mA, Pi = 0.65W For Ci and Li see certificate
Barrier	MTL7787+, BAS01ATEX7217 or P&FZ787, BAS01ATEX7005 or any other barrier that conforms to note 5 of ATX038 (Available on request)

Monitran Ltd | Monitor House | 33 Hazlemere Road | Penn | Bucks | UK | HP10 8AD
Telephone **+44 (0)1494 816569** | E-mail **info@monitran.com** | Website **www.monitran.com**

We reserve the right to alter specifications without prior notice.

MTN/2285IW Series


Intrinsically safe submersible velocity transducer 4-20mA output for PLC interface
ATEX & IECEx Group II approved

Studs and grub screws



Part #	From	To
MS036	¼"-28 UNF Male	M6 Male
MS039	¼"-28 UNF Male	10-32 UNF Male
MS067	¼"-28 UNF Male	M8 Male
MS068	¼"-28 UNF Male	¼"-28 UNF Male
MS124	¼"-28 UNF Male	M10 Male
MS132	¼"-28 UNF Male	M12 Male

Quick fit adapters




Part #	From	To
MS001	Q/F Male	Glue base
MS002	Q/F Male	M8 Male
MS003	Q/F Male	M10 Male
MS004	Q/F Male	¼"-28 UNF Male
MS006	Q/F Male	M6 Male

Options

- Various cable lengths
- Optional mountings
- Filters
- Other sensitivities (see below)

Part #	Mounting	xx = Optional velocity (mm/s rms)
MTN/2285IW-xx	¼"UNF Female	0-10 0-20 0-25 0-50 0-100
MTN/2285IWQ-xx	Q/F Female	

Mounting adapters




Part #	From	To
MS005	Q/F Male	¼"-28 UNF Female
MS007	Q/F Male	10-32 UNF Female
MS008	Q/F Male	M8 Female
MS011	¼"-28 UNF Male	Q/F Female
MS013	¼"-28 UNF Male	Glue base
MS033	¼"-28 UNF Male	Q/F Female
MS038	Q/F Male	M8 Conical Male
MS061	¼"-28 UNF Male	10-32 UNF Male
MS079	¼"-28 UNF Male	Q/F Female
MS106	Q/F Male	M10 Female

Isolation

Part #	From	To
MS034	¼"-28 UNF Male	¼"-28 UNF Female
MS093	Q/F Male	M8 Male

System connection

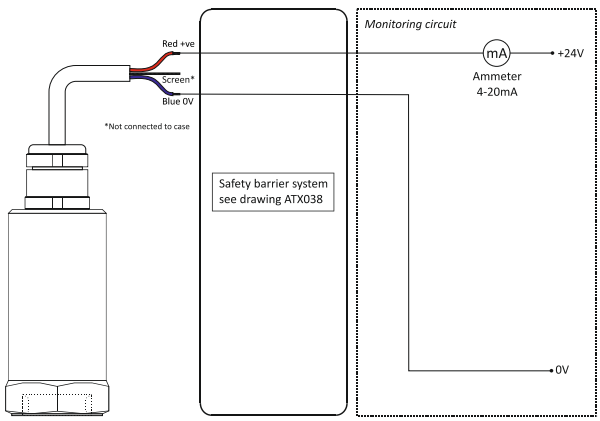

Note: Care should be taken not to install this in a high velocity dust laden atmosphere.

[1] This cable has additional hosing around it manufactured from PTFE plastic, which has a surface resistivity of greater than 1 GΩ and therefore poses a risk from electrostatic ignition.
[2] Warning ref Group II: The Ci and Li were previously lower. The installer must take account of the increase in internal capacitance and inductance present on this apparatus.

Monitran Ltd | Monitor House | 33 Hazlemere Road | Penn | Bucks | UK | HP10 8AD
Telephone **+44 (0)1494 816569** | E-mail **info@monitran.com** | Website **www.monitran.com**

ISO 9001 Registered Company sira CERTIFICATION UKAS MANAGEMENT SYSTEMS 011
CERTIFICATE NUMBER: 021097

We reserve the right to alter specifications without prior notice.