

CONFIDENTIAL



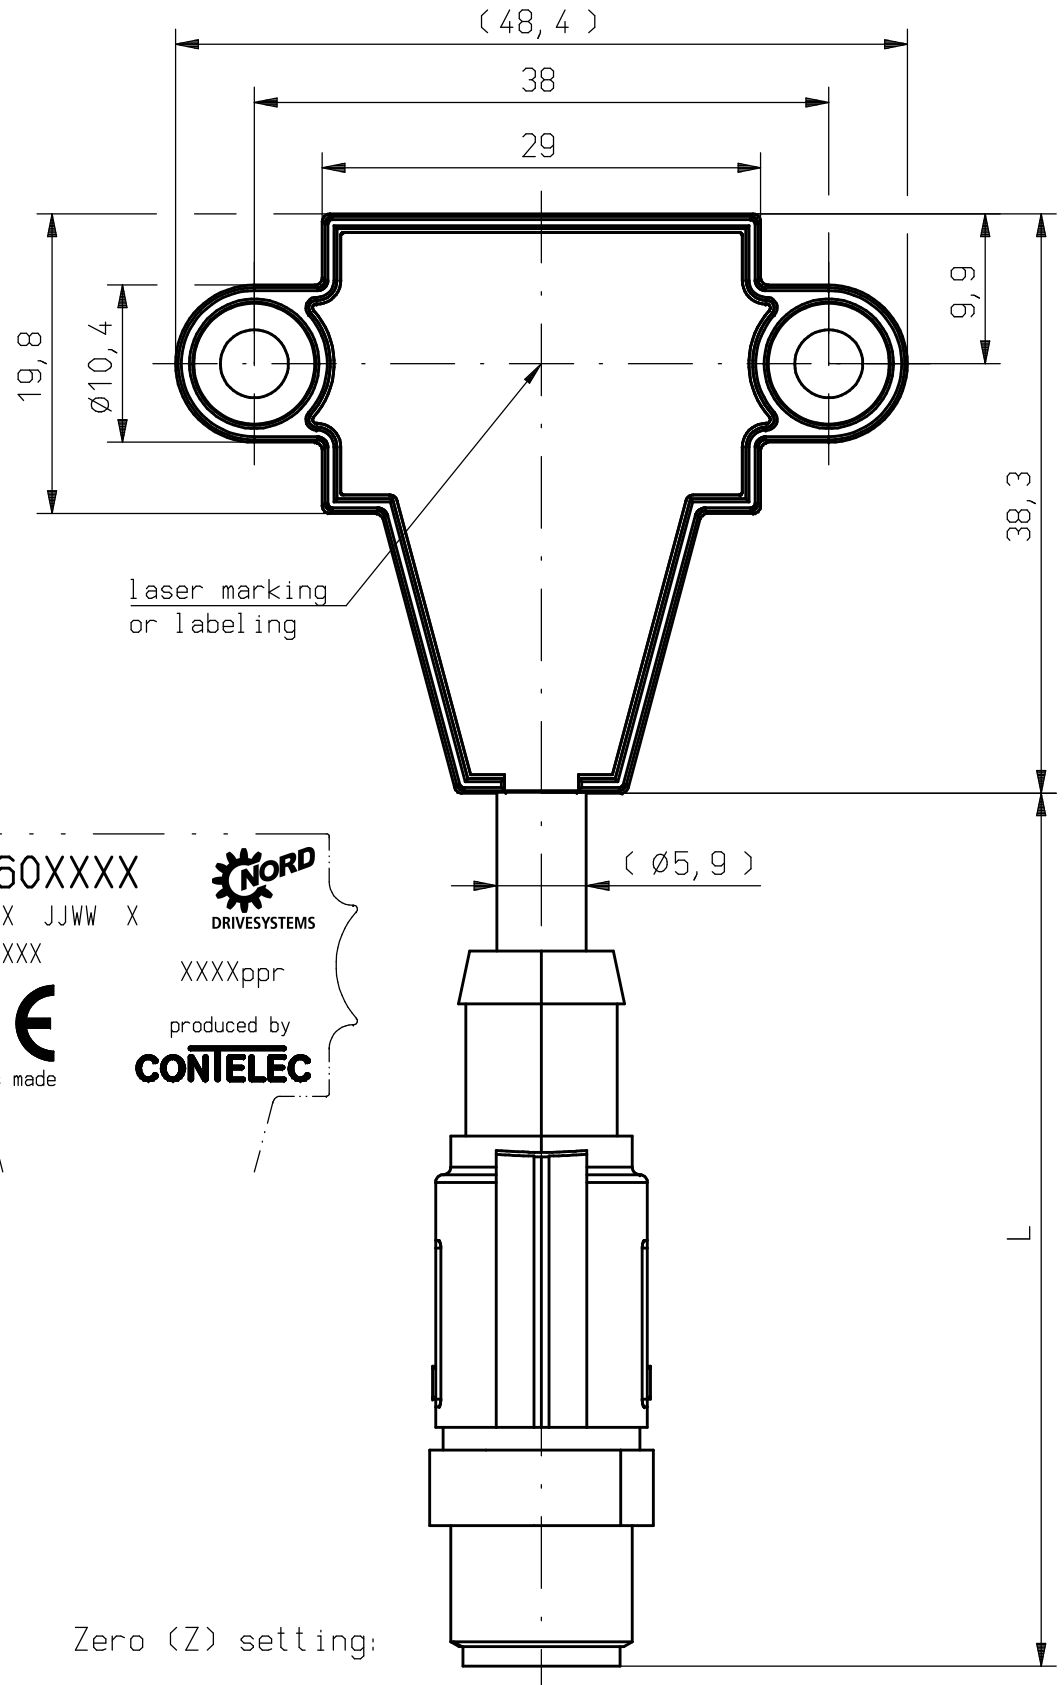

Male

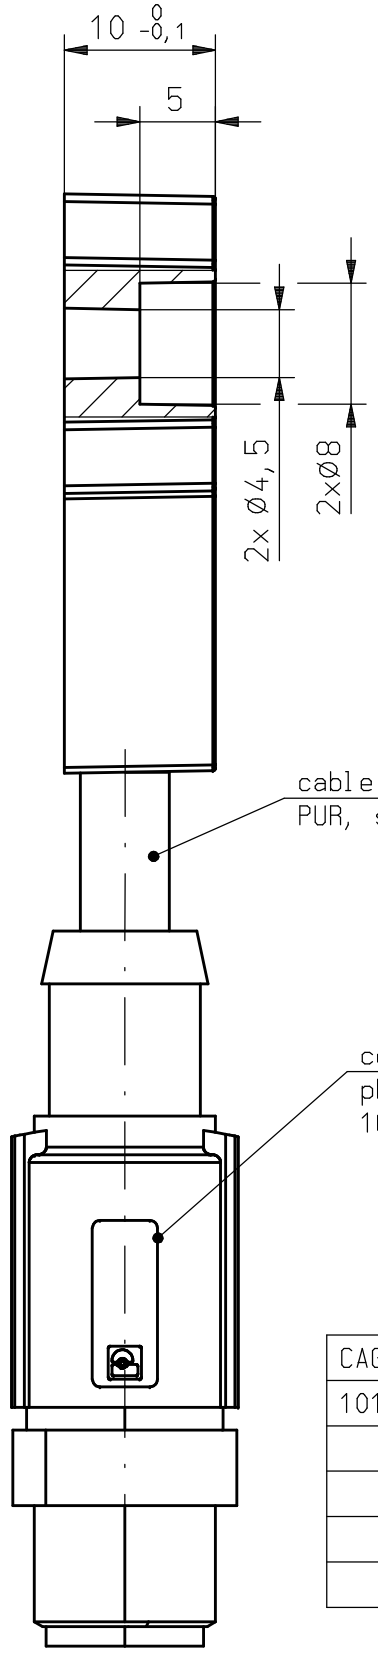


Connector configuration:


1. Ub
2. channel B
3. GND
4. channel A
5. channel Z setting

Specifications:

Power supply voltage (Ub)	:	8...35 Vdc
Independent linearity without misalignment	:	±0,5% of measuring range
Interface	:	incremental (A/B/Z)
Output driver	:	HTL (Push-pull)40mA, short circuit proof
Protection class	:	IP68
Operating temp.	:	-25°C...80°C
MTTFd/MTBF	:	466/466 years

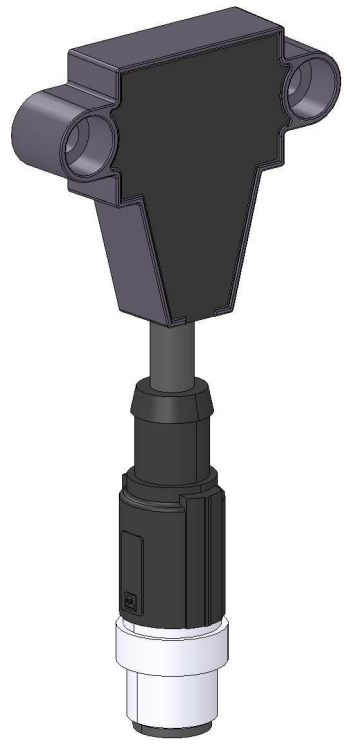

scale 1:1

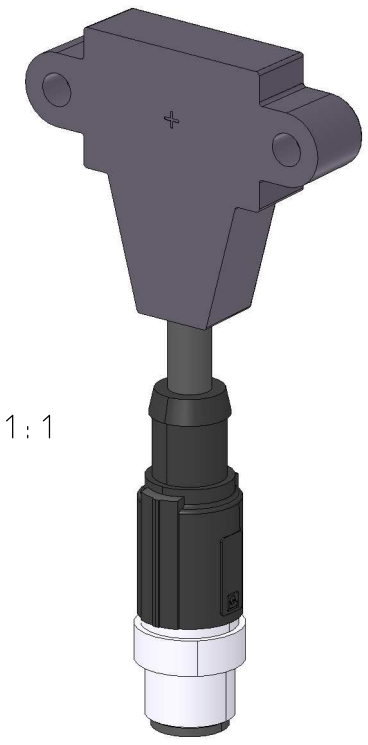


1960XXXX
XXXXX JJWW X
XXXXXXX
XXXXppr
swiss made
produced by CONTELEC

Assembly drawing ZZ 19727

CAG Art.:	Nord Art.:	CAG designation:	Resolution [ppr]:	Cable length (L) [mm]:
101556	19600009	Vert-X 32E0bD36 17Fx906	1024	3000 ±55

Zero (Z) setting:

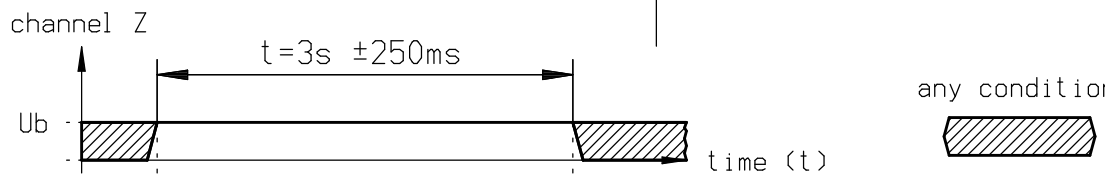

Customer Release (Signature required)	Company:
Hereby we declare, that the content of this document is complete and valid for us	
Date:	Name: / Signature:

Pos	Menge	EH	Abmessung	Werkstoff	Gewicht	Bemerkung	Art.Nummer
1	1	Stk.					-

Ind.	Änderung	Datum	Name
F	Stecker	09.12.2019	nipa
E	Connector conf.	29.11.2018	nipa
D	Überarbeitung	17.10.2018	nipa
C	Kabell./Laserm.	05.09.2018	egst
B	Technical Data	02.05.2018	nipa

Maßstab 2:1 (1:1)

A3 ©	Datum	Name
Bearbeitet	23.04.2018	nipa
Geprüft	22.01.2020	scda
Freigabe	22.01.2020	scda
Vorg. Zei.		
Folge Zei.		
Urspr.	18728A	

Allg.Tol. DIN/ISO 2768-mH

Dateiname C:C027B771.SZA | L°° Nr./Ref.Nr. L18583

Bez.1 Vert-X 32E0bD36 17Fx9XX

Bez.2 Vert-X 32E

CONTELEC AG
CH-2503 BIEL

MB	19730	F	Blatt 1/1

Alle Rechte vorbehalten!