PRESSURE REDUCING VALVE

Model 420

Hydraulically operated, pressure reducing control valve that reduces higher upstream pressure to lower constant downstream pressure, regardless of fluctuating demand or varying upstream pressure.




Features & Benefits

- Line pressure driven – Independent operation
- High performance control trim
  - High stability and accuracy at wide flow range
  - Drip tight sealing
- Flexible design - Easy addition of features
- Advanced globe hydro-efficient design
  - Unobstructed flow path
  - Single moving part
  - Non-turbulent flow
  - High flow capacity
- Fully supported & balanced diaphragm
  - Excellent low flow regulation performance
  - Progressively restrains valve closing
  - Prevents diaphragm distortion
- In-line serviceable
  - Easy maintenance
  - Minimal down time


Typical Applications

- Highrise and midrise residential buildings - Reducing pressure at the pressure zone inlet
- Municipal systems - Reducing pressure at potable water connections to buildings and structures


Typical Installation

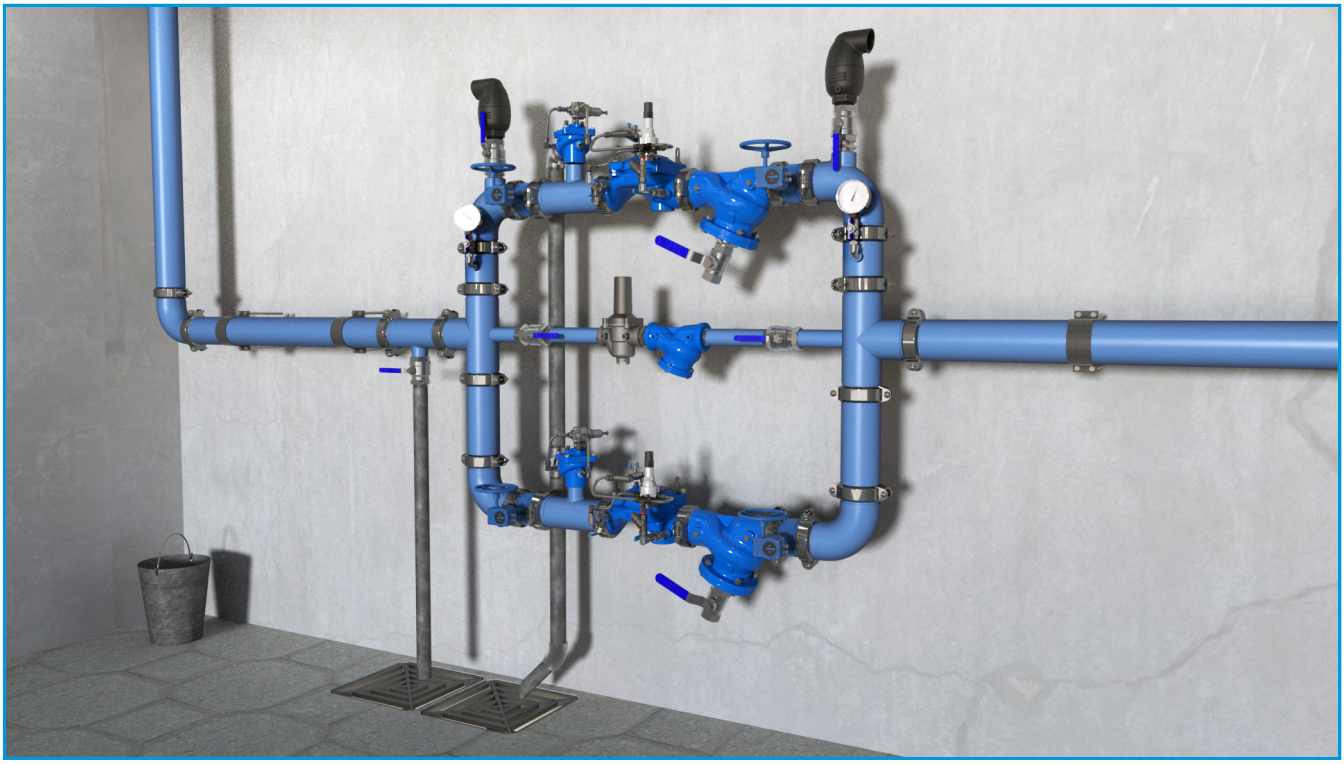

All images in this catalog are for illustration only

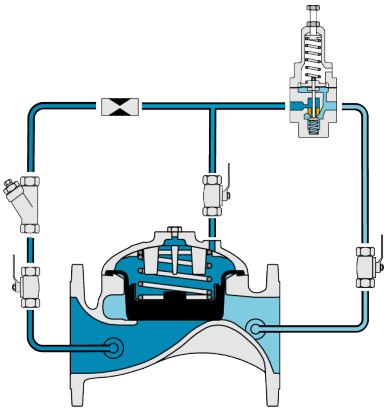

Closed

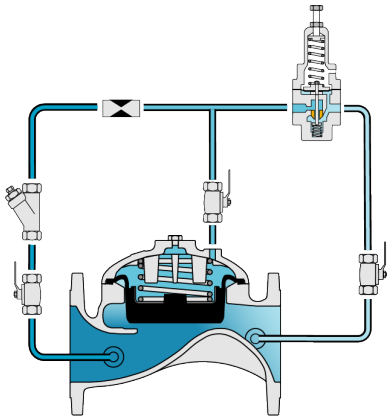

Regulating

This drawing refers to 1½ – 10"; 40-250 mm sized valves only. For other sizes please refer to the Model's IOM.

Main Valve

Size Range: 1½-12"; DN40-300
Pattern: Globe
Pressure Rating: 16 bar
End Connection: Flanged, Threaded, Grooved
Temperature Rating: 60°C
Optional higher temperature: Consult BERMAD

Standard Materials:

Body & Cover: Ductile Iron
Cover Bolts: Steel
Diaphragm: Reinforced EPDM with vulcanized radial seal disk
Spring: St. St. 302
Coating: Dark blue Fusion bonded epoxy
For other materials contact BERMAD

Control System

Standard Materials:

Accessories: Stainless Steel, Bronze & Brass
Tubing: Stainless Steel or Copper
Fittings: Stainless Steel or Brass

Pilot standard materials:

Body: Stainless Steel, Bronze & Brass
Elastomers: Synthetic Rubber
Internals and Spring: Stainless Steel

Pilot Options:

Various pilots and calibration springs are available.
Select according to valve size and operating conditions.
For more details check relevant pilots product pages.

Notes

- Inlet Pressure, Outlet Pressure and Flow-rate are required for optimal sizing and cavitation analysis.
- Recommended continuous flow velocity: 0.1-6.0 m/sec; 0.3-20 ft/sec.
- Minimum operating pressure: 0.7 bar; 10 psi. For lower pressure requirements consult factory.

For detailed Engineering & Specification data, IOM and CAD Drawings, visit the Model Page on the BERMAD website.

The information contained herein may be changed by BERMAD without notice. BERMAD shall not be held liable for any errors.
© Copyright 2016-2026 BERMAD CS Ltd