

MODEL
DBL


ISO 05: Flow into workports A and B or out of A and B
CAVITY: T-5A

sunhydraulics.com/model/DBL






Check, A and B, Free Flow Into Valve



Check, A and B, Free Flow Out of Valve



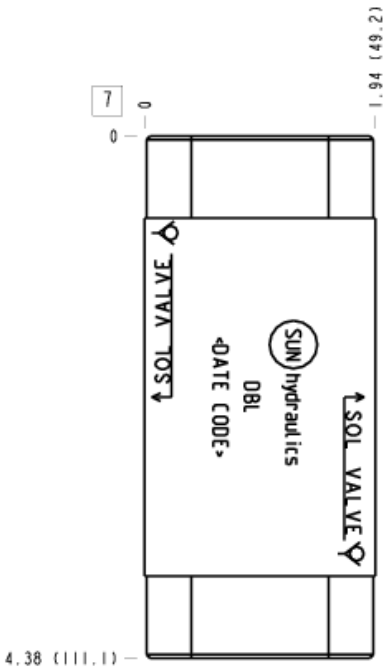

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 05
Body Features	Flow into workports A and B or out of A and B
Stack Height	1.99 in.
Seal Plate Included (see notes)	Yes
Open Cavities	2
Cavity	T-5A
Model Weight	1.67 lb.

NOTES

- Stack height value in technical data table includes seal retainer plate.
- For check valve application, use only with CX*A check valves - free flow nose to side.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

© 2024 Sun Hydraulics

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-014	O-Ring	5
700-001	Seal Plate	1

CONFIGURATION OPTIONS
Model Code Example: DBL

MODIFIER

6061-T651 Aluminum, Buna-N

/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/V 6061-T651 Aluminum, Viton

/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil

/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil

/Y4 65-45-12 Ductile Iron, Viton, Chem. Black


/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

MANIFOLD FACES

FACE GRID


1	2	3	4
5	6	7	8
9	10	11	12

Face 2

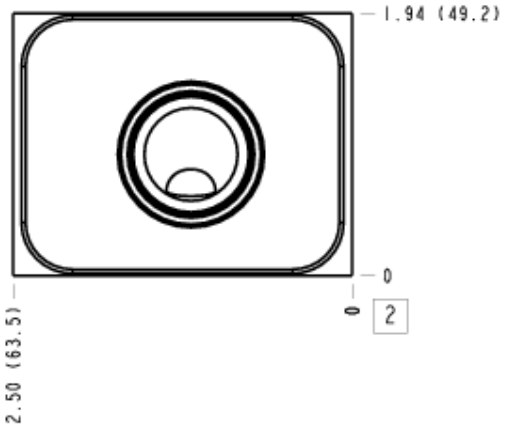


© 2024 Sun Hydraulics

Face 6

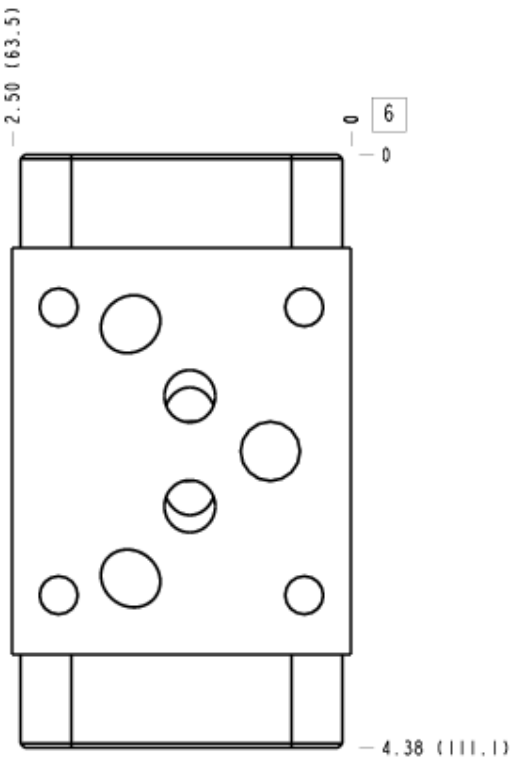


Face 7

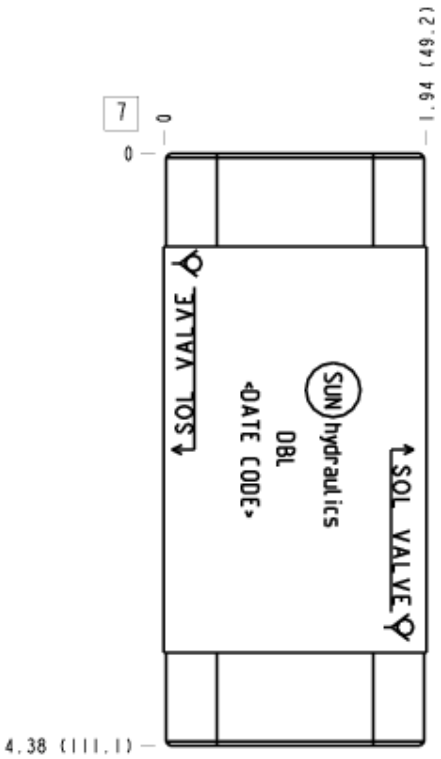


© 2024 Sun Hydraulics

Face 8

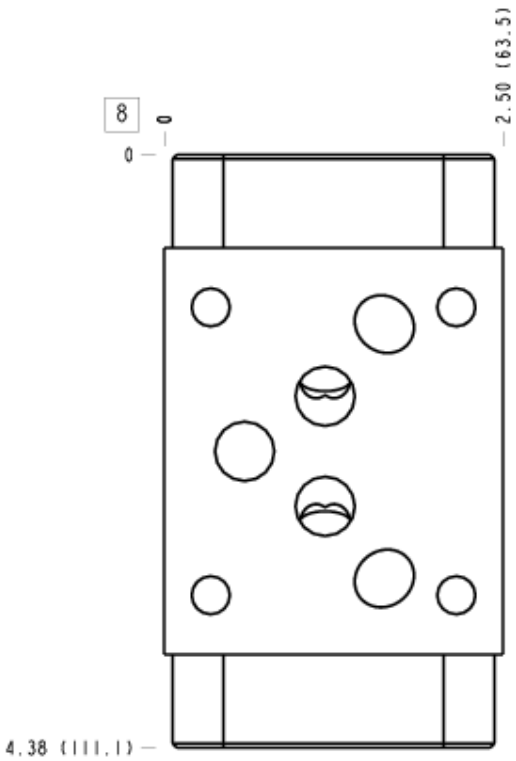

Face 10

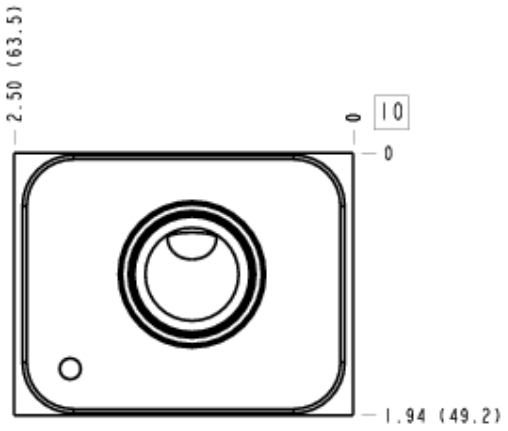

© 2024 Sun Hydraulics