




A DRIVE

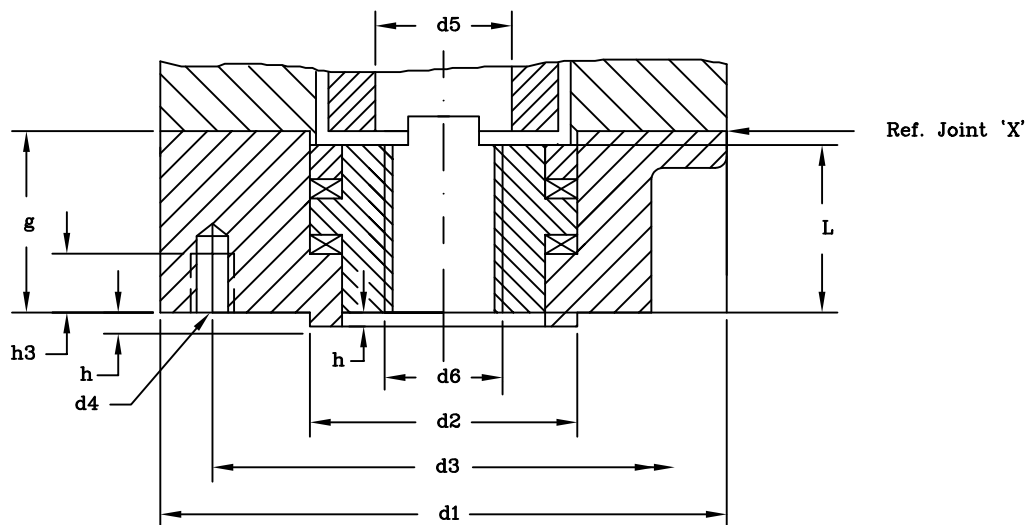

B DRIVE

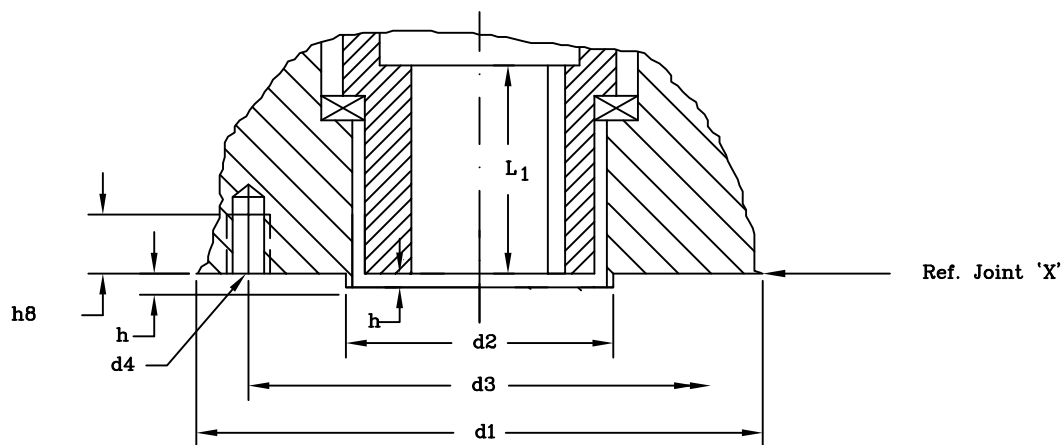

DIMENSIONS 'b' AND 't' BASED
ON RECTANGULAR KEYS PER
DIN 6885 AT MAX. BORE 'dy'

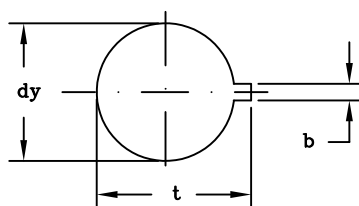

FLANGE TYPE PER
ISO 5210 STANDARD

ALL DIMENSIONS SHOWN IN mm

ACTUATOR MODEL	FLANGE TYPE	b	d1	d2 f8	d3	(qty.)d4,unc	d5	d6 max	dy max	g	h	h3	h8	t	L	L1
SA07.2 SA07.6	F07	8	90	55	70	(4) M8x1.5	34	26	28	40	3	12	12	31.3	37	35
SA07.2 SA07.6	F10	12	125	70	102	(4) M10x1.5	35	34	42	50	3	15	13	45.3	47	45
SA10.2	F10	12	125	70	102	(4) M10x1.5	42	40	42	50	3	15	13	45.3	47	45
SA14.2 SA14.6	F14	18	175	100	140	(4) M16x2.0	60	57	60	65	4	25	25	64.4	60	65
SA16.2	F16	22	210	130	165	(4) M20x2.5	80	75	80	80	5	35	30	85.4	75	80

A AND B DRIVE DIMENSIONS (ISO)

SA 07.2 – SA 16.2

BY/DATE
TL
09/05/13

APP/DATE
CA
09/05/13

DWG. No.

SK099488

REV
1