




Notes:

1. Metric tolerance per ISO 2768-m. Dimensions in brackets [] are in inches and rounded to one decimal place.
2. Seven inch minimum clearance recommended for removal of access cover and equipment adjustment.
3. See appropriate drive drawing for detail.
4. See data sheets for conduit entries.

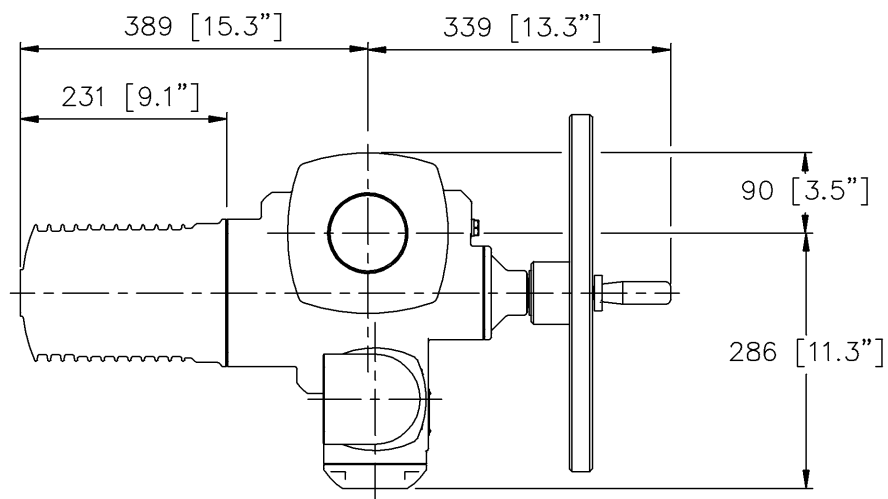