


K50BCLXGXPQ

LED Indicator – Beacon



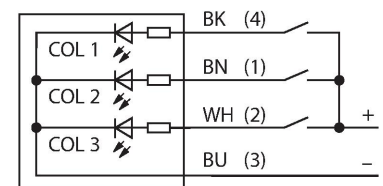
Technical data

Type	K50BCLXGXPQ
ID	3018336
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Green
Luminous flux lumen	39 lm
LED service life (L70)	50000 h
Dimmable	no
Features of color 1	Green, Permanently on
Special features	Wash down
Electrical data	
Operating voltage	12...30 VDC
DC rated operational current	≤ 160 mA
Max. current consumption per color	160 mA
Input type	PNP
Response time typical	< 7 ms
Mechanical data	
Cascadable	No
Design	Puck, K50BL
Dimensions	Ø 50 x 60 x 60 mm
Housing material	Plastic, PC, Black
Window material	Polycarbonate, clear
Electrical connection	Connector, M12 × 1, PVC
Number of cores	4
Ambient temperature	-40...+50 °C

Features

- LED all-round visible
- Top and side view
- Individually controllable
- Screw-in thread M30x1.5
- Protection class IP67
- Monochrome: Green (COL 2)
- Illuminance:
 - Front 3130 Lx at 4" distance
 - Rear: 840 Lx at 4" distance
- Male M12x1
- Operating voltage 12...30 VDC



Wiring diagram



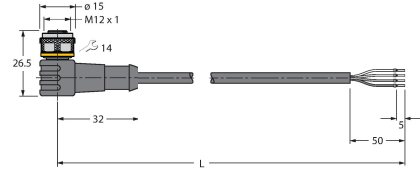
Technical data

Relative humidity	0...90 %
Protection class	IP67 IP69
Tests/approvals	
Approvals	CE, cULus listed

Accessories

SMB30A	3032723	SMB30SC	3052521
	Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread		Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable

Accessories

Dimension drawing	Type	ID	
	RKC4.4T-2/TEL	6625013	Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com
	WKC4.4T-2/TEL	6625025	Connection cable, female M12, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com