

Item description/product images



Description

Material:

Indexing pin hardened:
Threaded sleeve 1.4305.
Indexing pin 1.4034.

Indexing pin not hardened:
Threaded sleeve 1.4305.
Indexing pin 1.4305.

Mushroom knob 1.4305, electrolytic-polish.

Version:

Bright.
Indexing pin ground.

Note:


Indexing plungers are used to prevent any change in locking position due to lateral forces. A new locking position can only be set after the pin has been manually disengaged. Form C or D is recommended for applications in which the pin is disengaged over extended periods and should be prevented from springing back.

On request:

Special versions.

Drawings

Form C
lockout type
without locknut

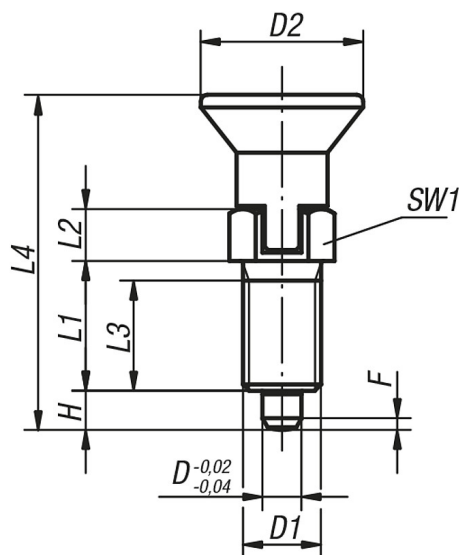

Overview of items

Order No. locking pin hardened	Order No. locking pin, hardened	Order No. locking pin not hardened	Order No. locking pin, not hardened	Form	D	D1	D2	L1	L2	L3	H	L4	SW1	F x 30°	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
03089-003903	-	03089-113903	-	C	3	M6x0,75	14	12	5	103,5	31,5	8	0,8		4,5	10
-	03089-003004	-	03089-113004	C	4	M8x1	18	15	6	13	4	38,5	10	1	6	12
-	03089-003105	-	03089-113105	C	5	M10x1	21	17	7	15	5	43,5	13	1,3	5	12

Overview of items

Order No. locking pin hardened	Order No. locking pin, hardened	Order No. locking pin not hardened	Order No. locking pin, not hardened	Form	D	D1	D2	L1	L2	L3	H	L4	SW1	F x 30°	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
-	03089-003206	-	03089-113206	C	6	M12x1,5	25	20	8	17	6	51,7	14	1,8	6	14
-	03089-003308	-	03089-113308	C	8	M16x1,5	33	26	10	23	8	68	19	2,3	15	35
-	03089-003410	-	03089-113410	C	10	M20x1,5	33	28	12	25	10	74	22	2,8	15	34
03089-003412	-	03089-113412	-	C	12	M20x1,5	33	28	14	25	12	78	22	2,8	15	39
03089-003516	-	03089-113516	-	C	16	M24x2	40	32	18	28	16	96	27	3,2	20	46